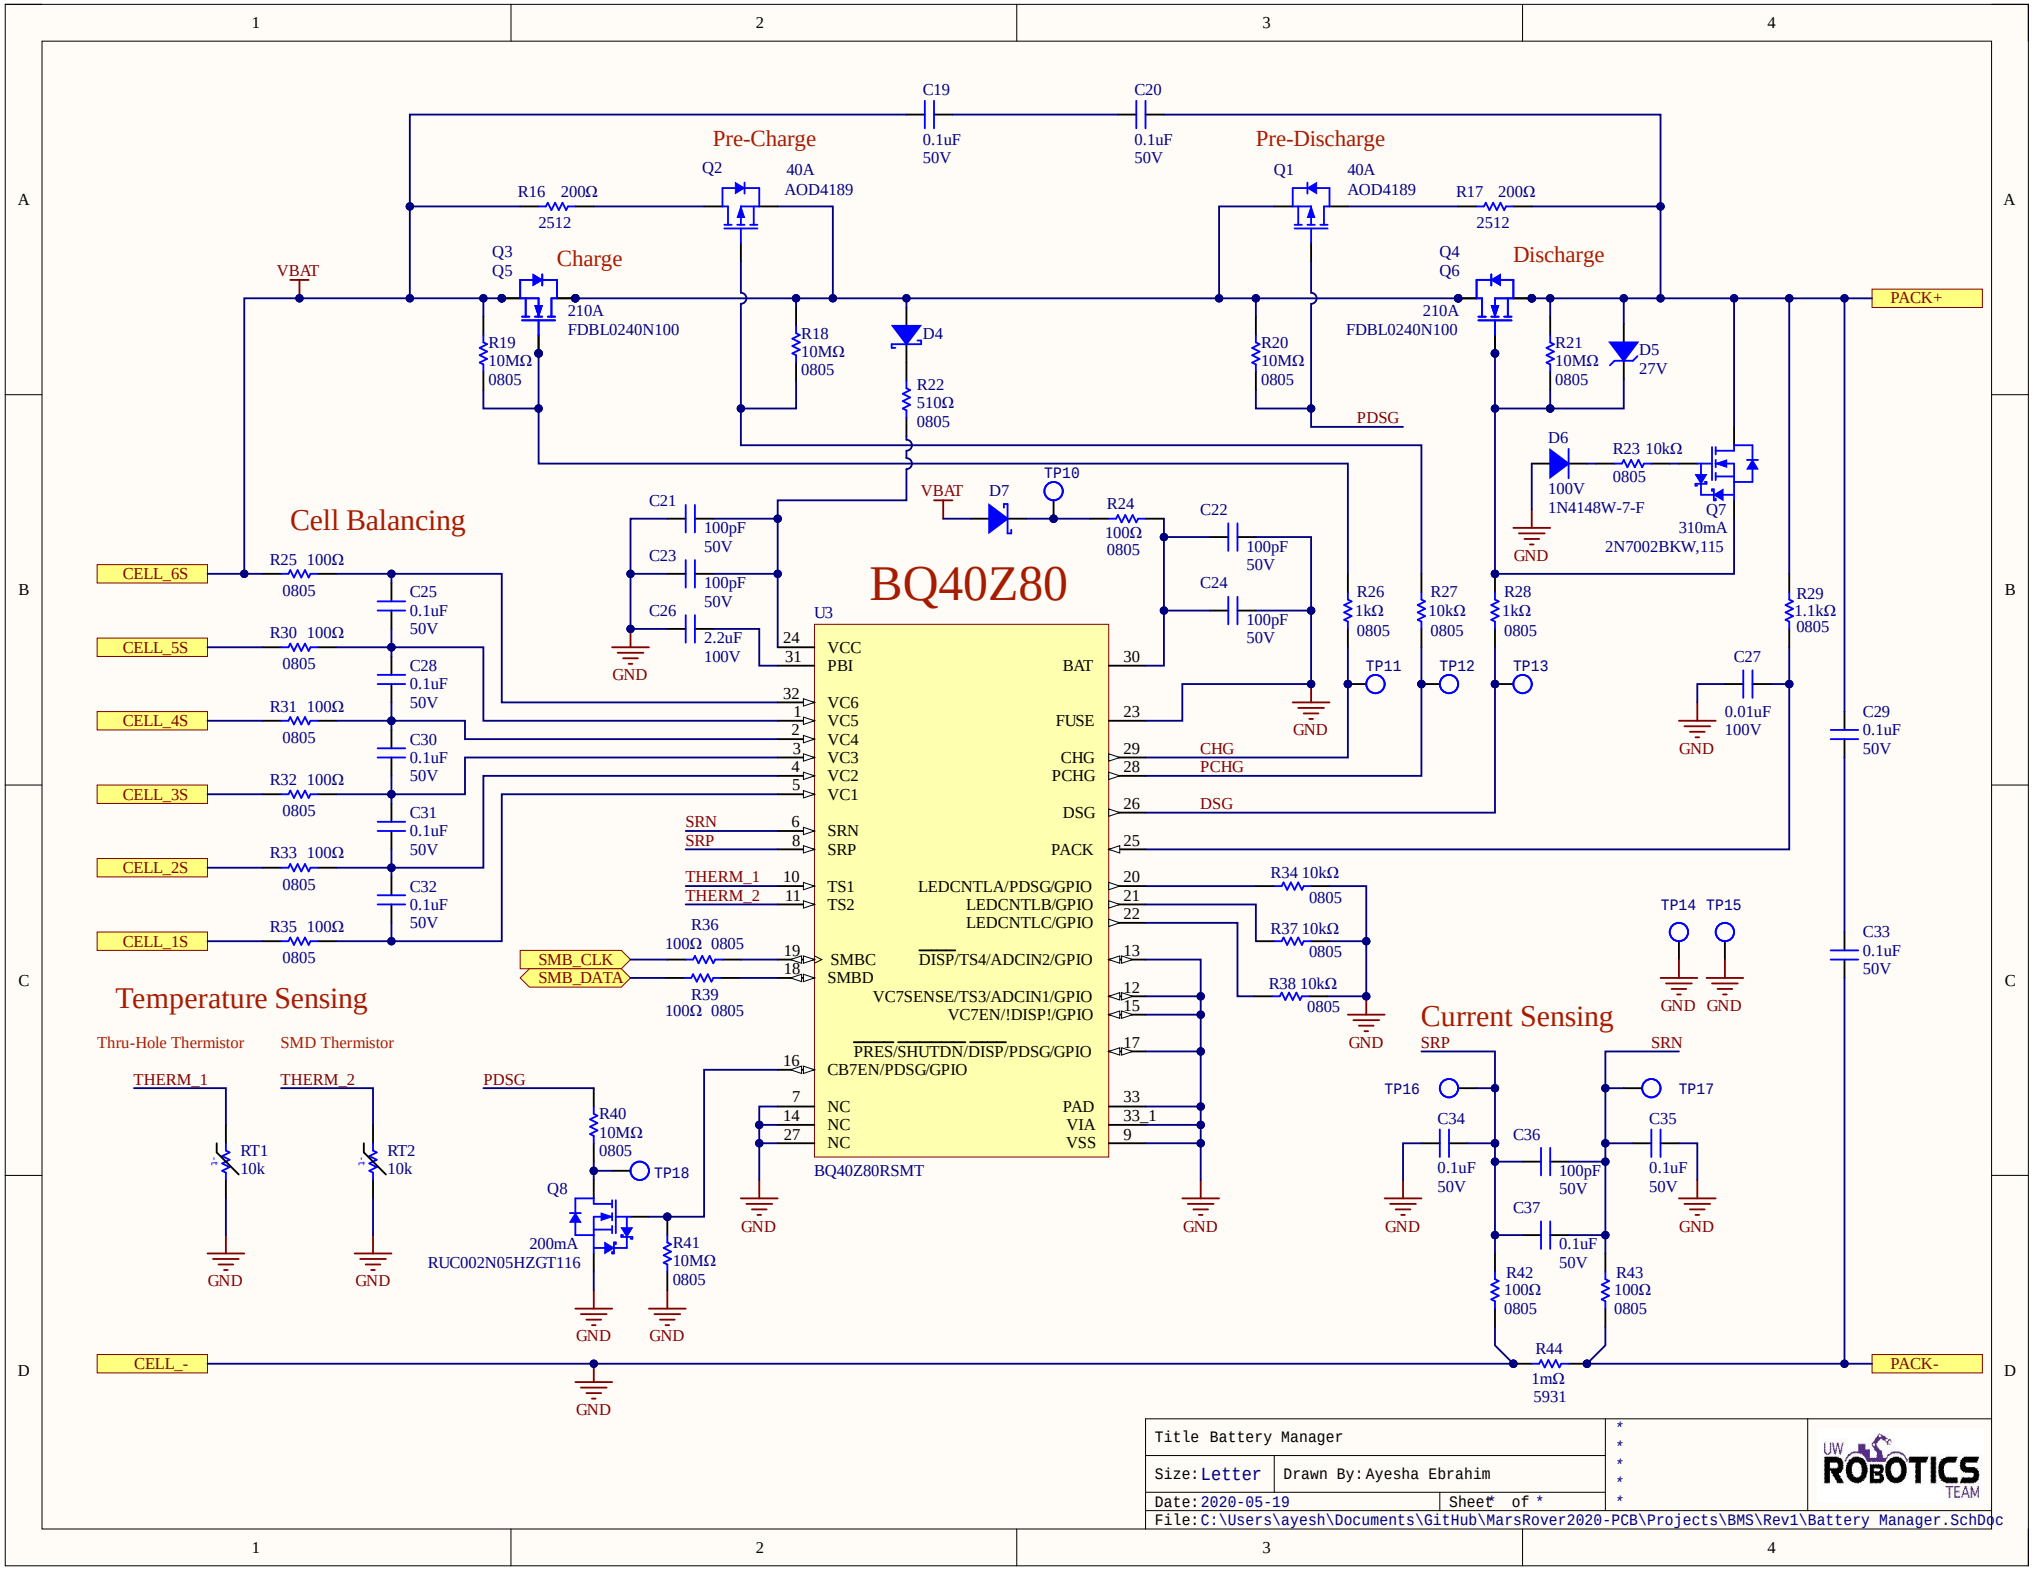
Pre-Charge
Pre-Discharge
Charge
Discharge
Cell Balancing
Temperature Sensing
Current Sensing
BQ40Z80
BQ40Z80RSMT
VBAT
PACK+
PACK-
CELL_6S
CELL_5S
CELL_4S
CELL_3S
CELL_2S
CELL_1S
CELL_-
SMB_CLK
SMB_DATA
SRN
SRP
PDSG
CHG
PCHG
DSG
THERM_1
THERM_2
Thru-Hole Thermistor
SMD Thermistor
GND
Title Battery Manager
Size: Letter
Drawn By: Ayesha Ebrahim
Date: 2020-05-19
Sheet * of *
File: C:\Users\ayesh\Documents\GitHub\MarsRover2020-PCB\Projects\BMS\Rev1\Battery Manager.SchDoc
UW ROBOTICS TEAM

Battery Balancing



Battery In



Pack Out



EV2400



Debug/Programing

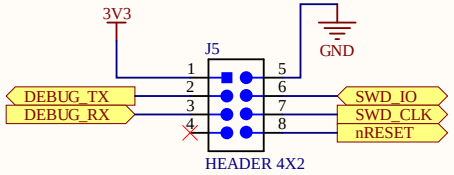

Title Connectors		UW Robotics 200 University Avenue Waterloo Ontario Canada N2L 3G6
Size: Letter	Drawn By: Ayesha Ebrahim	
Date: 2020-05-19	Sheet of	
File: C:\Users\ayesh\Documents\GitHub\MarsRover2020-PCB\Projects\BMS\Rev1\Connectors.SchDoc		

LCD

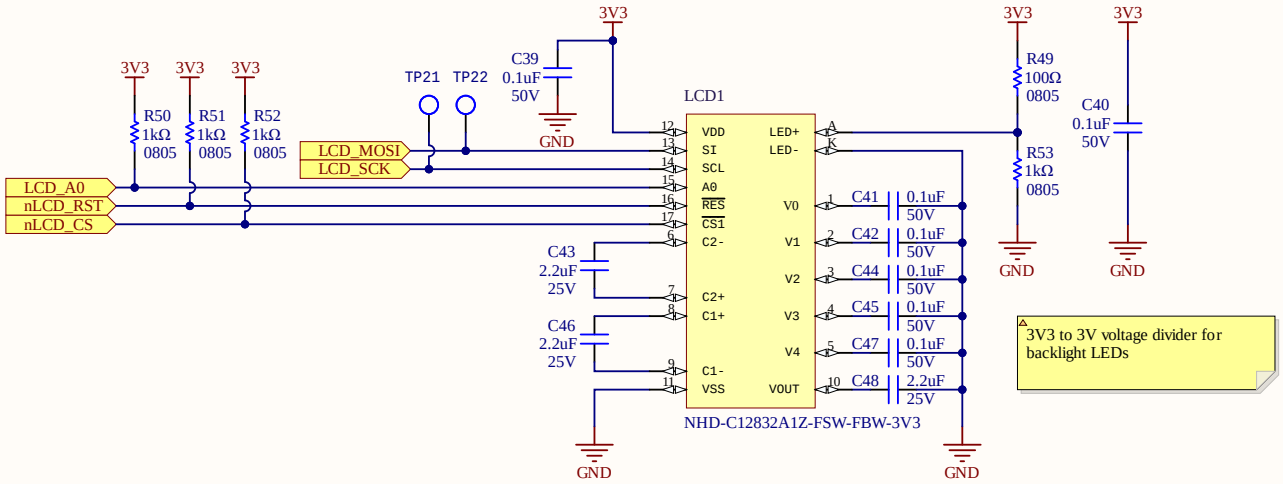

Title LCD			
Size: Letter	Drawn By: Ayesha Ebrahim		
Date: 2020-05-19	Sheet * of *		
File: C:\Users\ayesh\Documents\GitHub\MarsRover2020-PCB\Projects\BMS\Rev1\LCD.SchDoc			

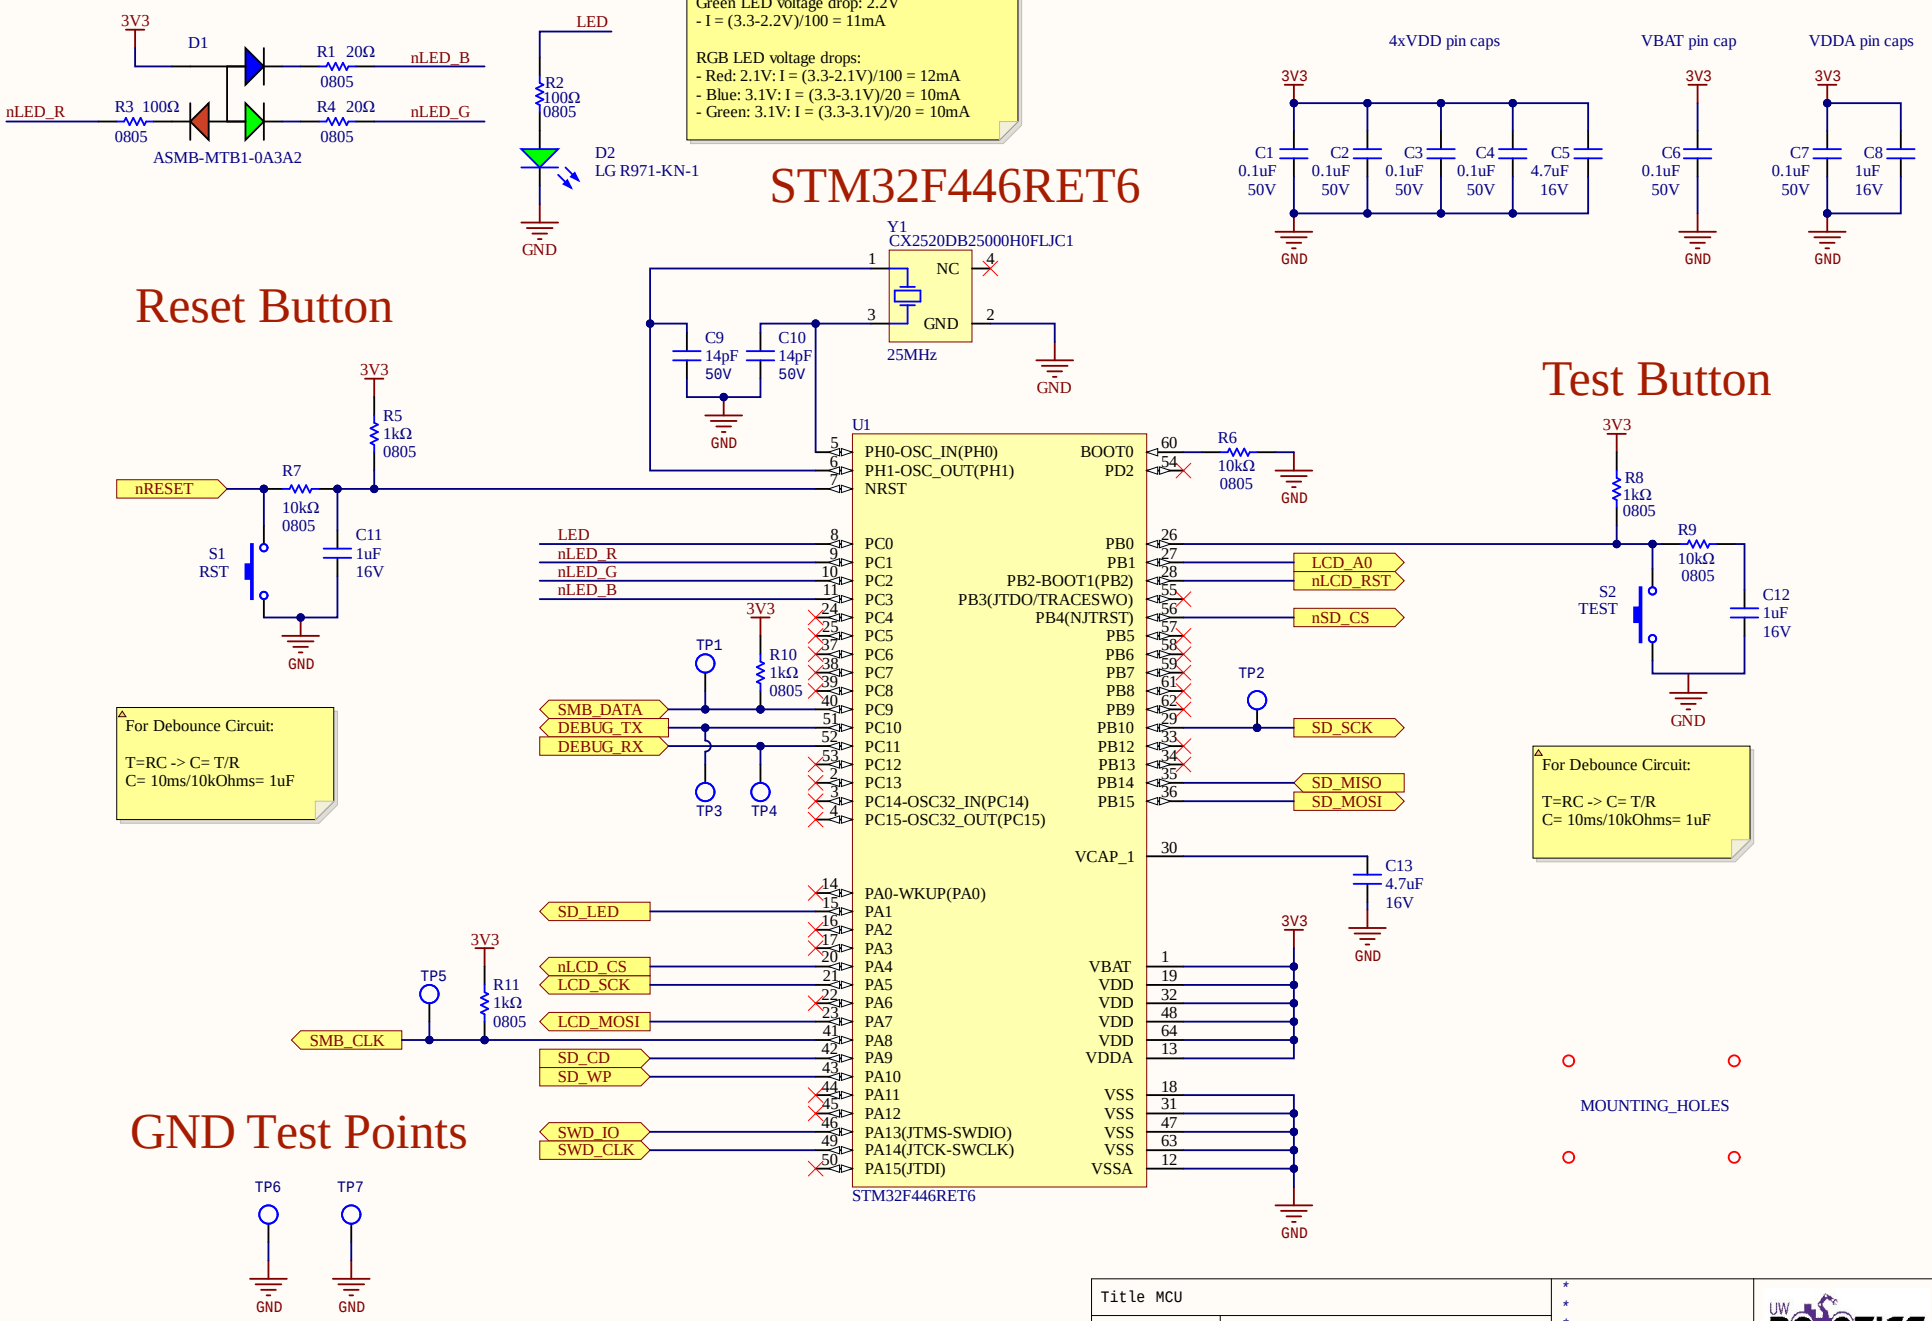
Test LEDs
3V3
D1
R1 20Ω
0805
nLED_B
nLED_R
R3 100Ω
0805
R4 20Ω
0805
nLED_G
ASMB-MTB1-0A3A2
LED
R2
100Ω
0805
D2
LG R971-KN-1
GND
Current Calculations
Green LED voltage drop: 2.2V
- I = (3.3-2.2V)/100 = 11mA
RGB LED voltage drops:
- Red: 2.1V: I = (3.3-2.1V)/100 = 12mA
- Blue: 3.1V: I = (3.3-3.1V)/20 = 10mA
- Green: 3.1V: I = (3.3-3.1V)/20 = 10mA
Decoupling Caps
4xVDD pin caps
VBAT pin cap
VDDA pin caps
C1 0.1uF 50V
C2 0.1uF 50V
C3 0.1uF 50V
C4 0.1uF 50V
C5 4.7uF 16V
C6 0.1uF 50V
C7 0.1uF 50V
C8 1uF 16V
STM32F446RET6
Y1
CX2520DB25000H0FLJC1
NC
GND
25MHz
C9 14pF 50V
C10 14pF 50V
Reset Button
R5 1kΩ 0805
R7 10kΩ 0805
nRESET
S1
RST
C11 1uF 16V
For Debounce Circuit:
T=RC -> C= T/R
C= 10ms/10kOhms= 1uF
U1
PH0-OSC_IN(PH0)
PH1-OSC_OUT(PH1)
NRST
BOOT0
PD2
R6 10kΩ 0805
PC0
PC1
PC2
PC3
PC4
PC5
PC6
PC7
PC8
PC9
PC10
PC11
PC12
PC13
PC14-OSC32_IN(PC14)
PC15-OSC32_OUT(PC15)
PB0
PB1
PB2-BOOT1(PB2)
PB3(JTDO/TRACESWO)
PB4(NJTRST)
PB5
PB6
PB7
PB8
PB9
PB10
PB12
PB13
PB14
PB15
LED
nLED_R
nLED_G
nLED_B
SMB_DATA
DEBUG_TX
DEBUG_RX
TP1
TP2
TP3
TP4
R10 1kΩ 0805
LCD_A0
nLCD_RST
nSD_CS
SD_SCK
SD_MISO
SD_MOSI
Test Button
R8 1kΩ 0805
R9 10kΩ 0805
S2
TEST
C12 1uF 16V
For Debounce Circuit:
T=RC -> C= T/R
C= 10ms/10kOhms= 1uF
VCAP_1
C13 4.7uF 16V
PA0-WKUP(PA0)
PA1
PA2
PA3
PA4
PA5
PA6
PA7
PA8
PA9
PA10
PA11
PA12
PA13(JTMS-SWDIO)
PA14(JTCK-SWCLK)
PA15(JTDI)
SD_LED
nLCD_CS
LCD_SCK
LCD_MOSI
SD_CD
SD_WP
SWD_IO
SWD_CLK
TP5
R11 1kΩ 0805
SMB_CLK
VBAT
VDD
VDDA
VSS
VSSA
MOUNTING_HOLES
GND Test Points
TP6
TP7
STM32F446RET6
Title MCU
Size: Letter
Drawn By: Ayesha Ebrahim
Date: 2020-05-19
Sheet * of *
File: C:\Users\ayesh\Documents\GitHub\MarsRover2020-PCB\Projects\BMS\Rev1\MCU.SchDoc
UW ROBOTICS TEAM

Battery Voltage to 3V3 Buck @ 1A Max

Designed for 15V-25.2V input

Route for 0.5A in

Inductor: SRN6045-150M
15uH, 20%, 95.8mOhm DCR (max)
1.9A (rms), 2.3A (sat), 4.5mm tall

Route for 1A out

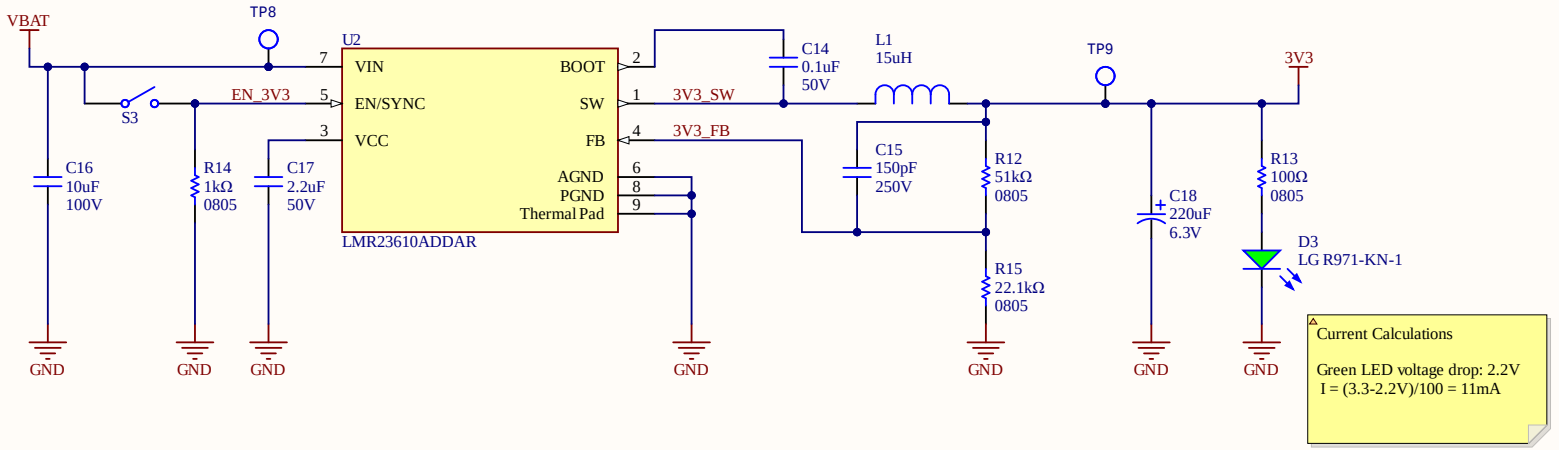

Max expected power on output = 1.65W
Max current = 0.5A
Expected Efficiency at 1A > 87.7%

Title Power		
Size: Letter	Drawn By: Ayesha Ebrahim	
Date: 2020-05-19	Sheet * of *	
File: C:\Users\ayesh\Documents\GitHub\MarsRover2020-PCB\Projects\BMS\Rev1\Power.SchDoc		

SD Card Connector

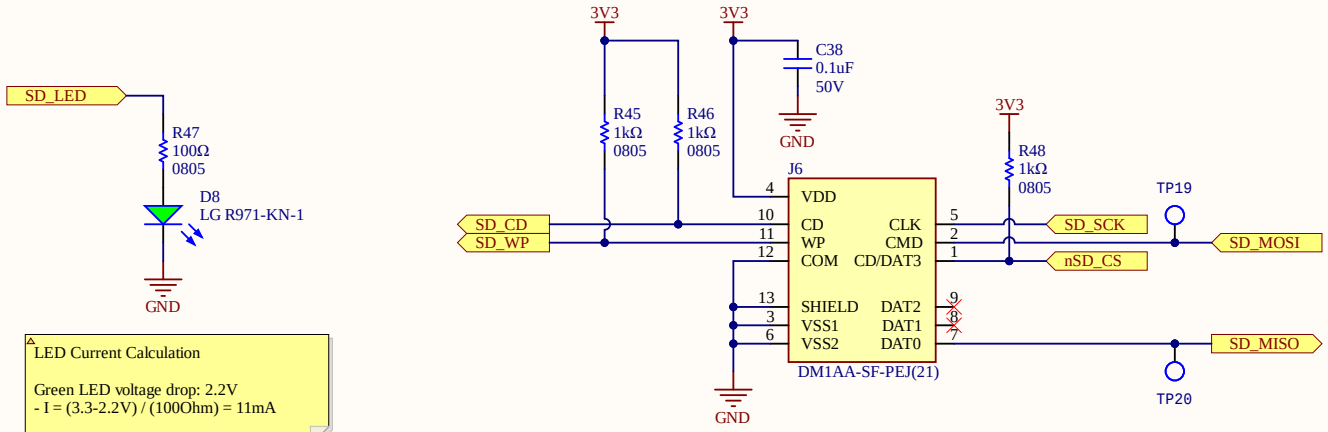

Title SD Card			
Size: Letter	Drawn By: Ayesha Ebrahim		
Date: 2020-05-19	Sheet * of *		
File: C:\Users\ayesh\Documents\GitHub\MarsRover2020-PCB\Projects\BMS\Rev1\SD Card.SchDoc			