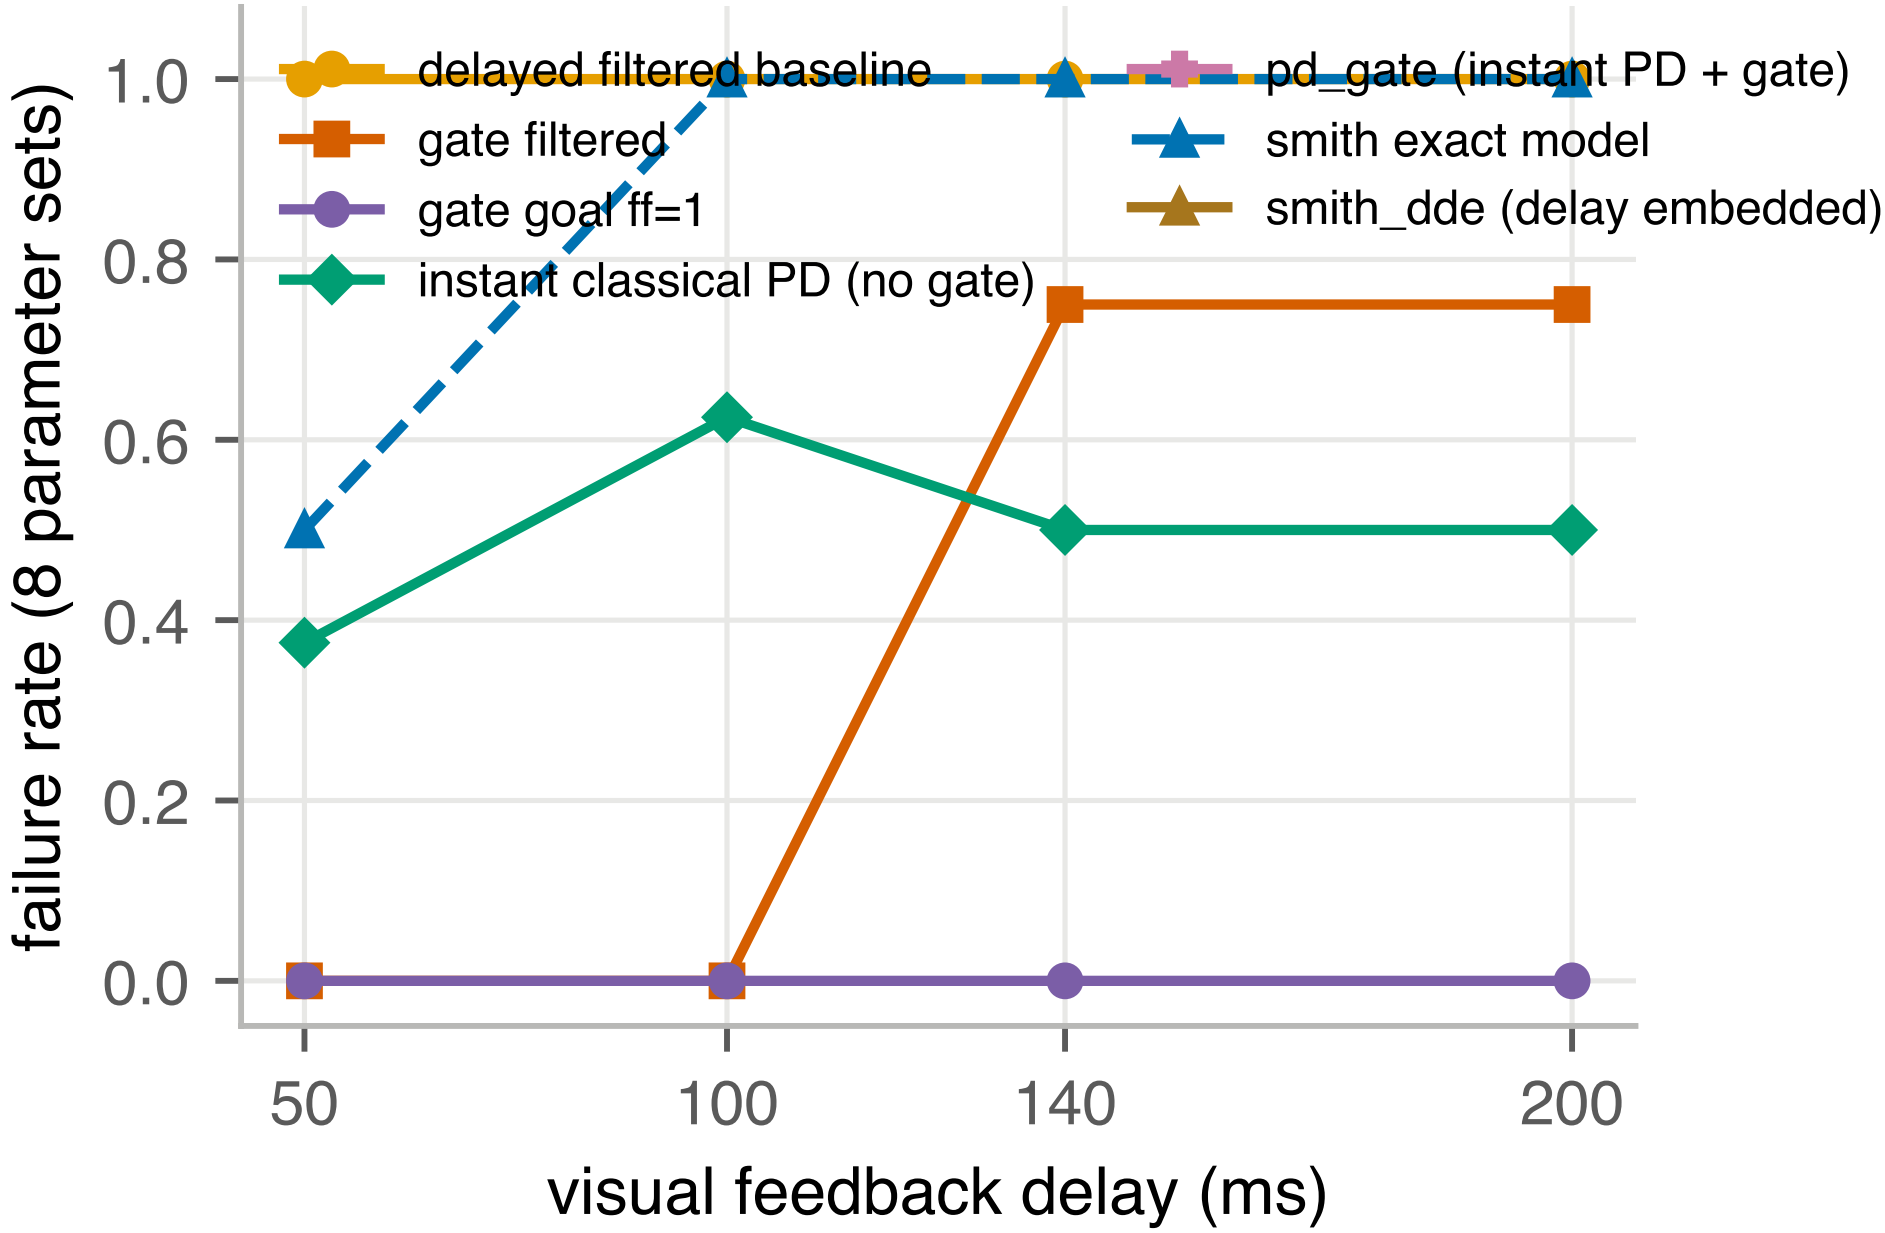
delayed filtered baseline
gate filtered
gate goal ff=1
instant classical PD (no gate)
pd_gate (instant PD + gate)
smith exact model
smith_dde (delay embedded)
failure rate (8 parameter sets)
1.0
0.8
0.6
0.4
0.2
0.0
50
100
140
200
visual feedback delay (ms)