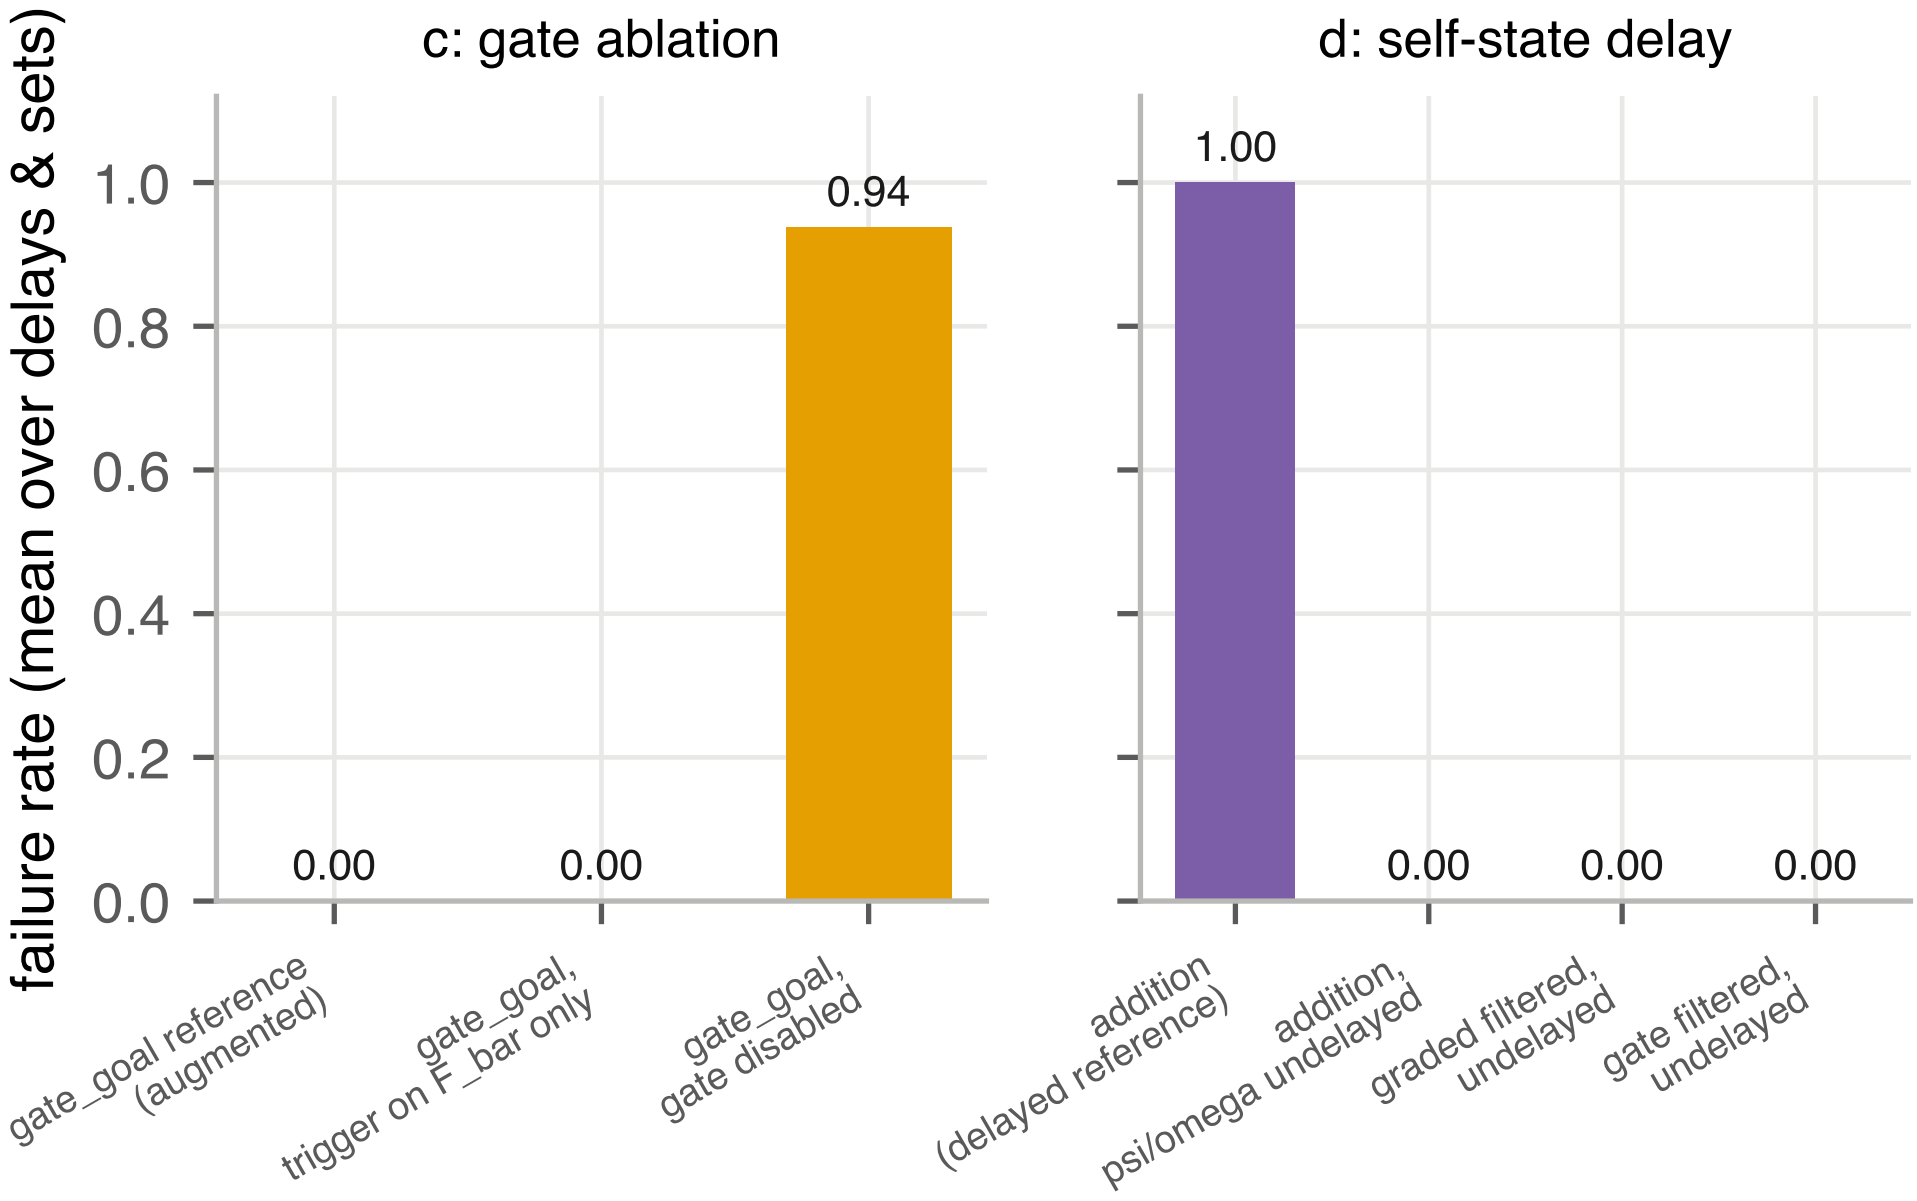
c: gate ablation
d: self-state delay
failure rate (mean over delays & sets)
1.0
0.8
0.6
0.4
0.2
0.0
0.00
0.00
0.94
1.00
0.00
0.00
0.00
gate_goal reference (augmented)
gate_goal, trigger on F_bar only
gate_goal, gate disabled
addition (delayed reference)
addition, psi/omega undelayed
graded filtered, undelayed
gate filtered, undelayed