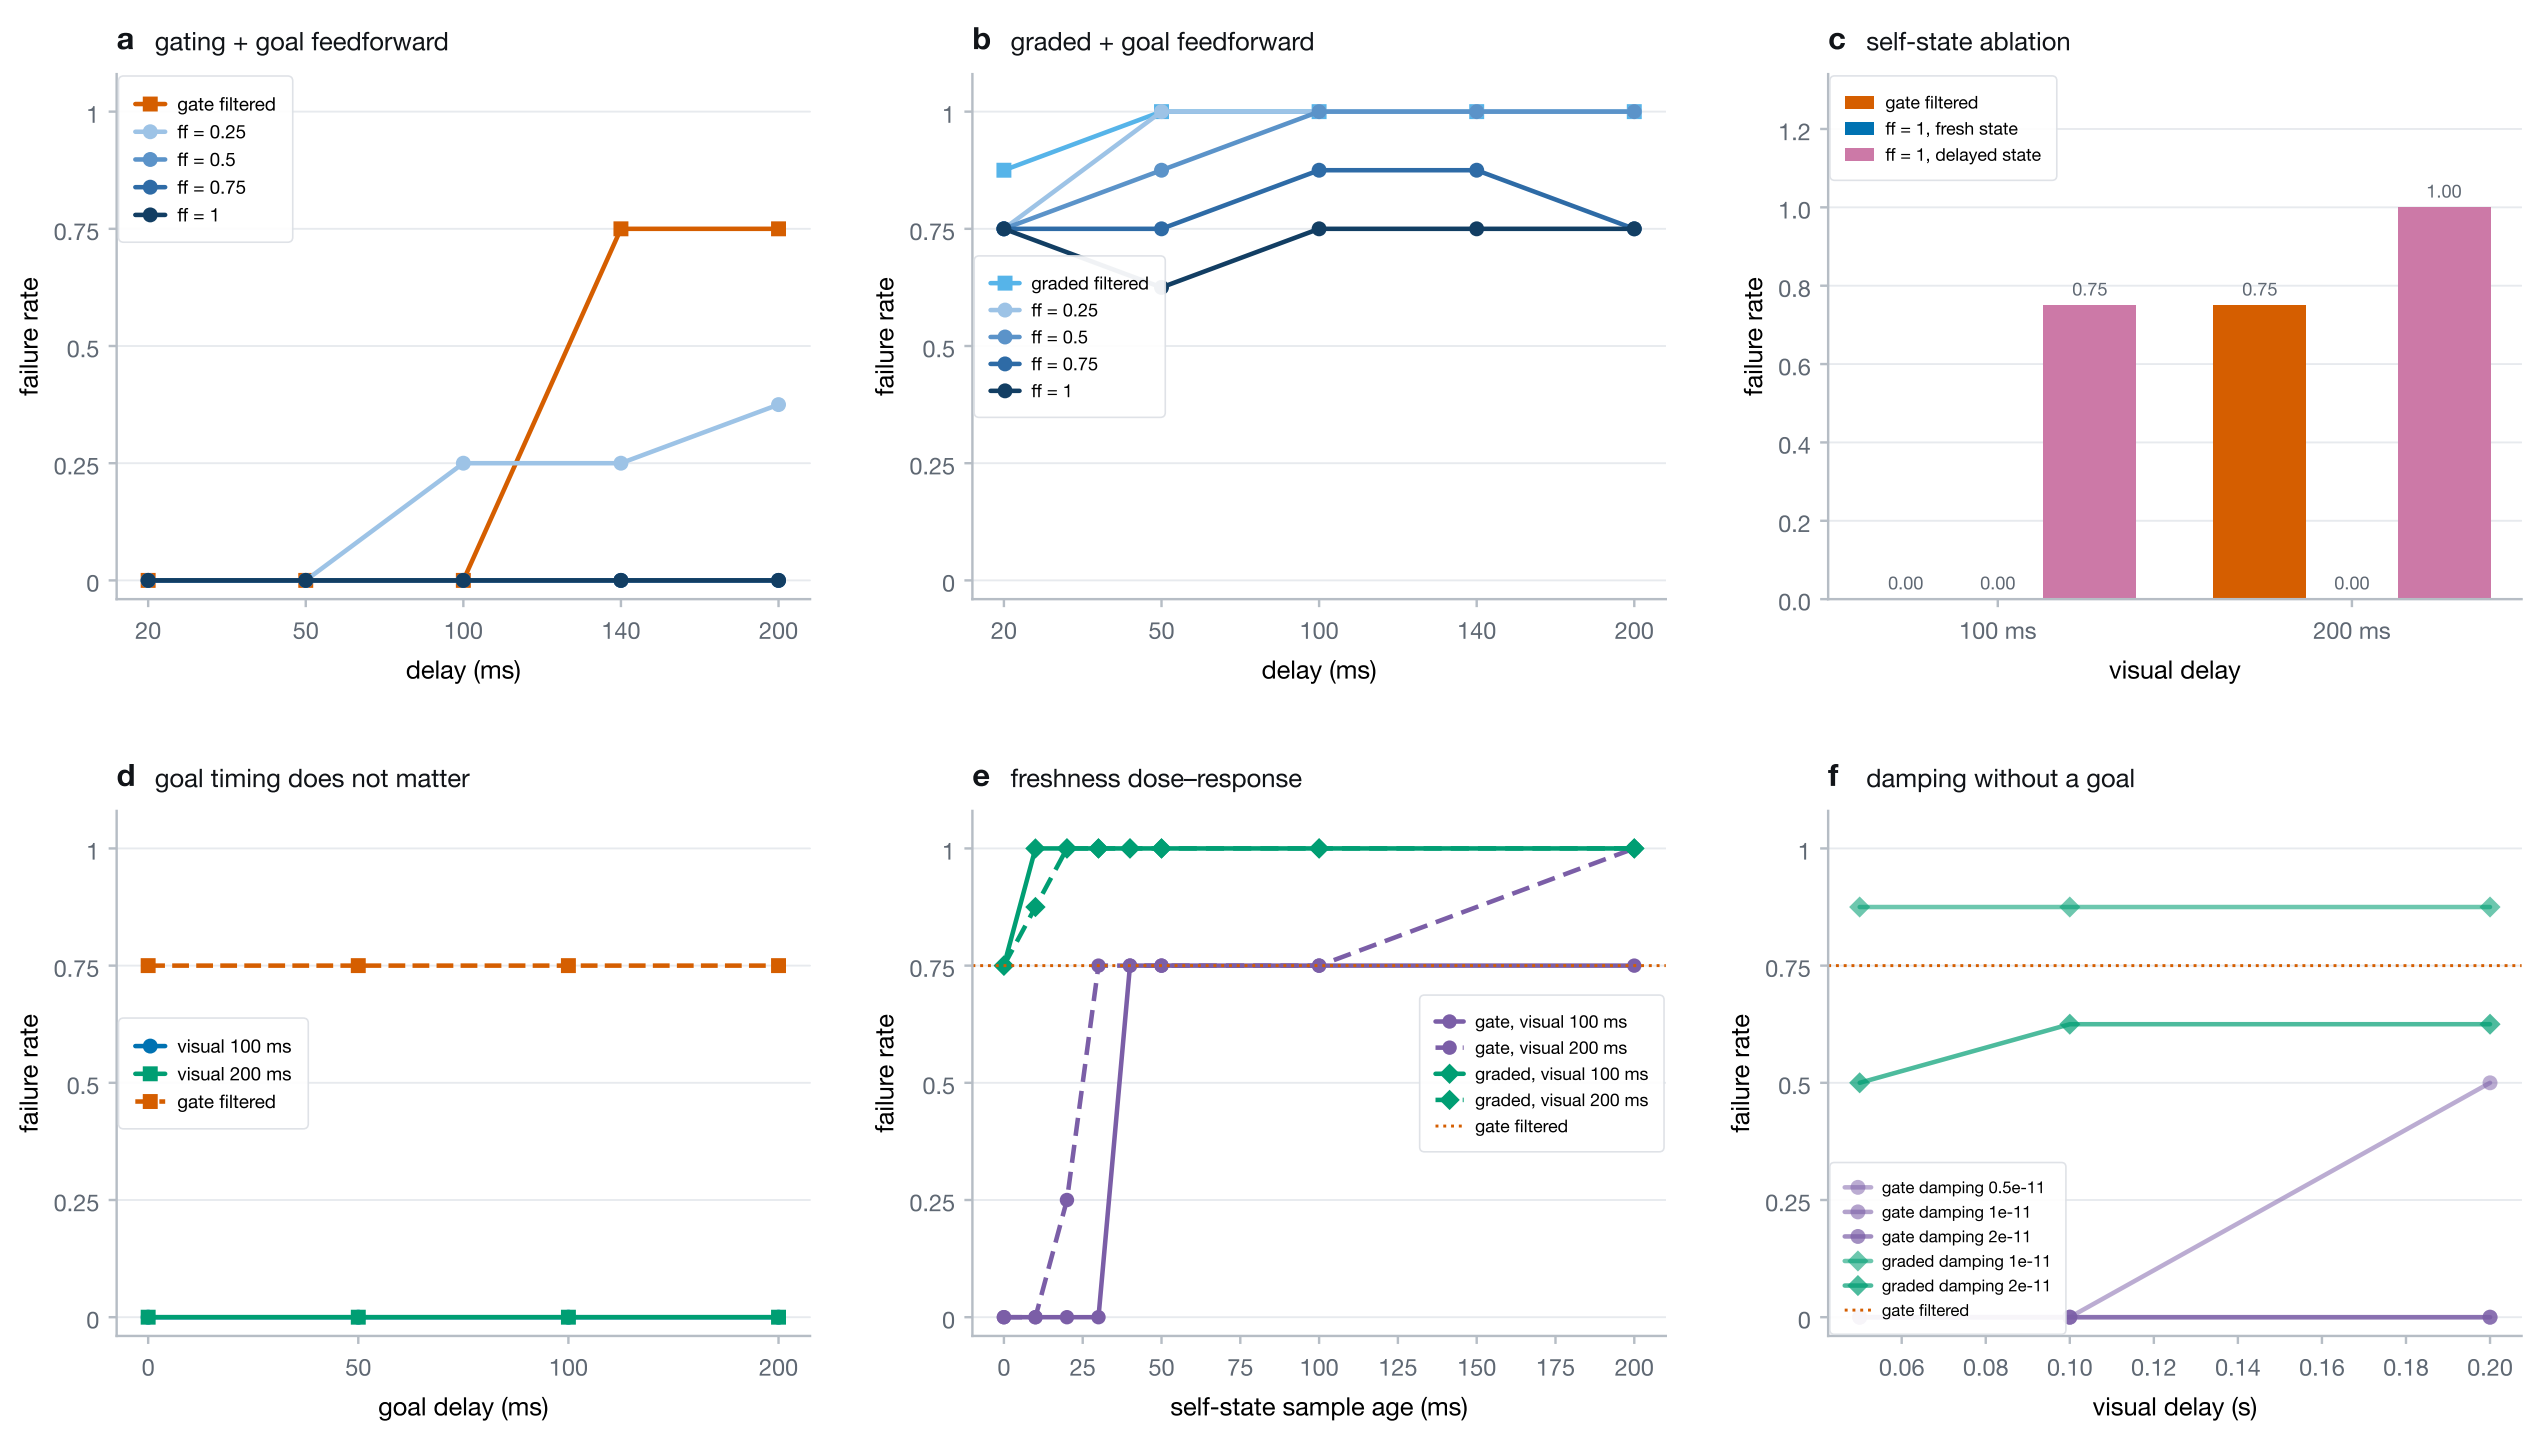
a gating + goal feedforward
gate filtered
ff = 0.25
ff = 0.5
ff = 0.75
ff = 1
failure rate
delay (ms)
b graded + goal feedforward
graded filtered
ff = 0.25
ff = 0.5
ff = 0.75
ff = 1
failure rate
delay (ms)
c self-state ablation
gate filtered
ff = 1, fresh state
ff = 1, delayed state
0.00
0.00
0.75
0.75
0.00
1.00
failure rate
100 ms
200 ms
visual delay
d goal timing does not matter
visual 100 ms
visual 200 ms
gate filtered
failure rate
goal delay (ms)
e freshness dose–response
gate, visual 100 ms
gate, visual 200 ms
graded, visual 100 ms
graded, visual 200 ms
gate filtered
failure rate
self-state sample age (ms)
f damping without a goal
gate damping 0.5e-11
gate damping 1e-11
gate damping 2e-11
graded damping 1e-11
graded damping 2e-11
gate filtered
failure rate
visual delay (s)