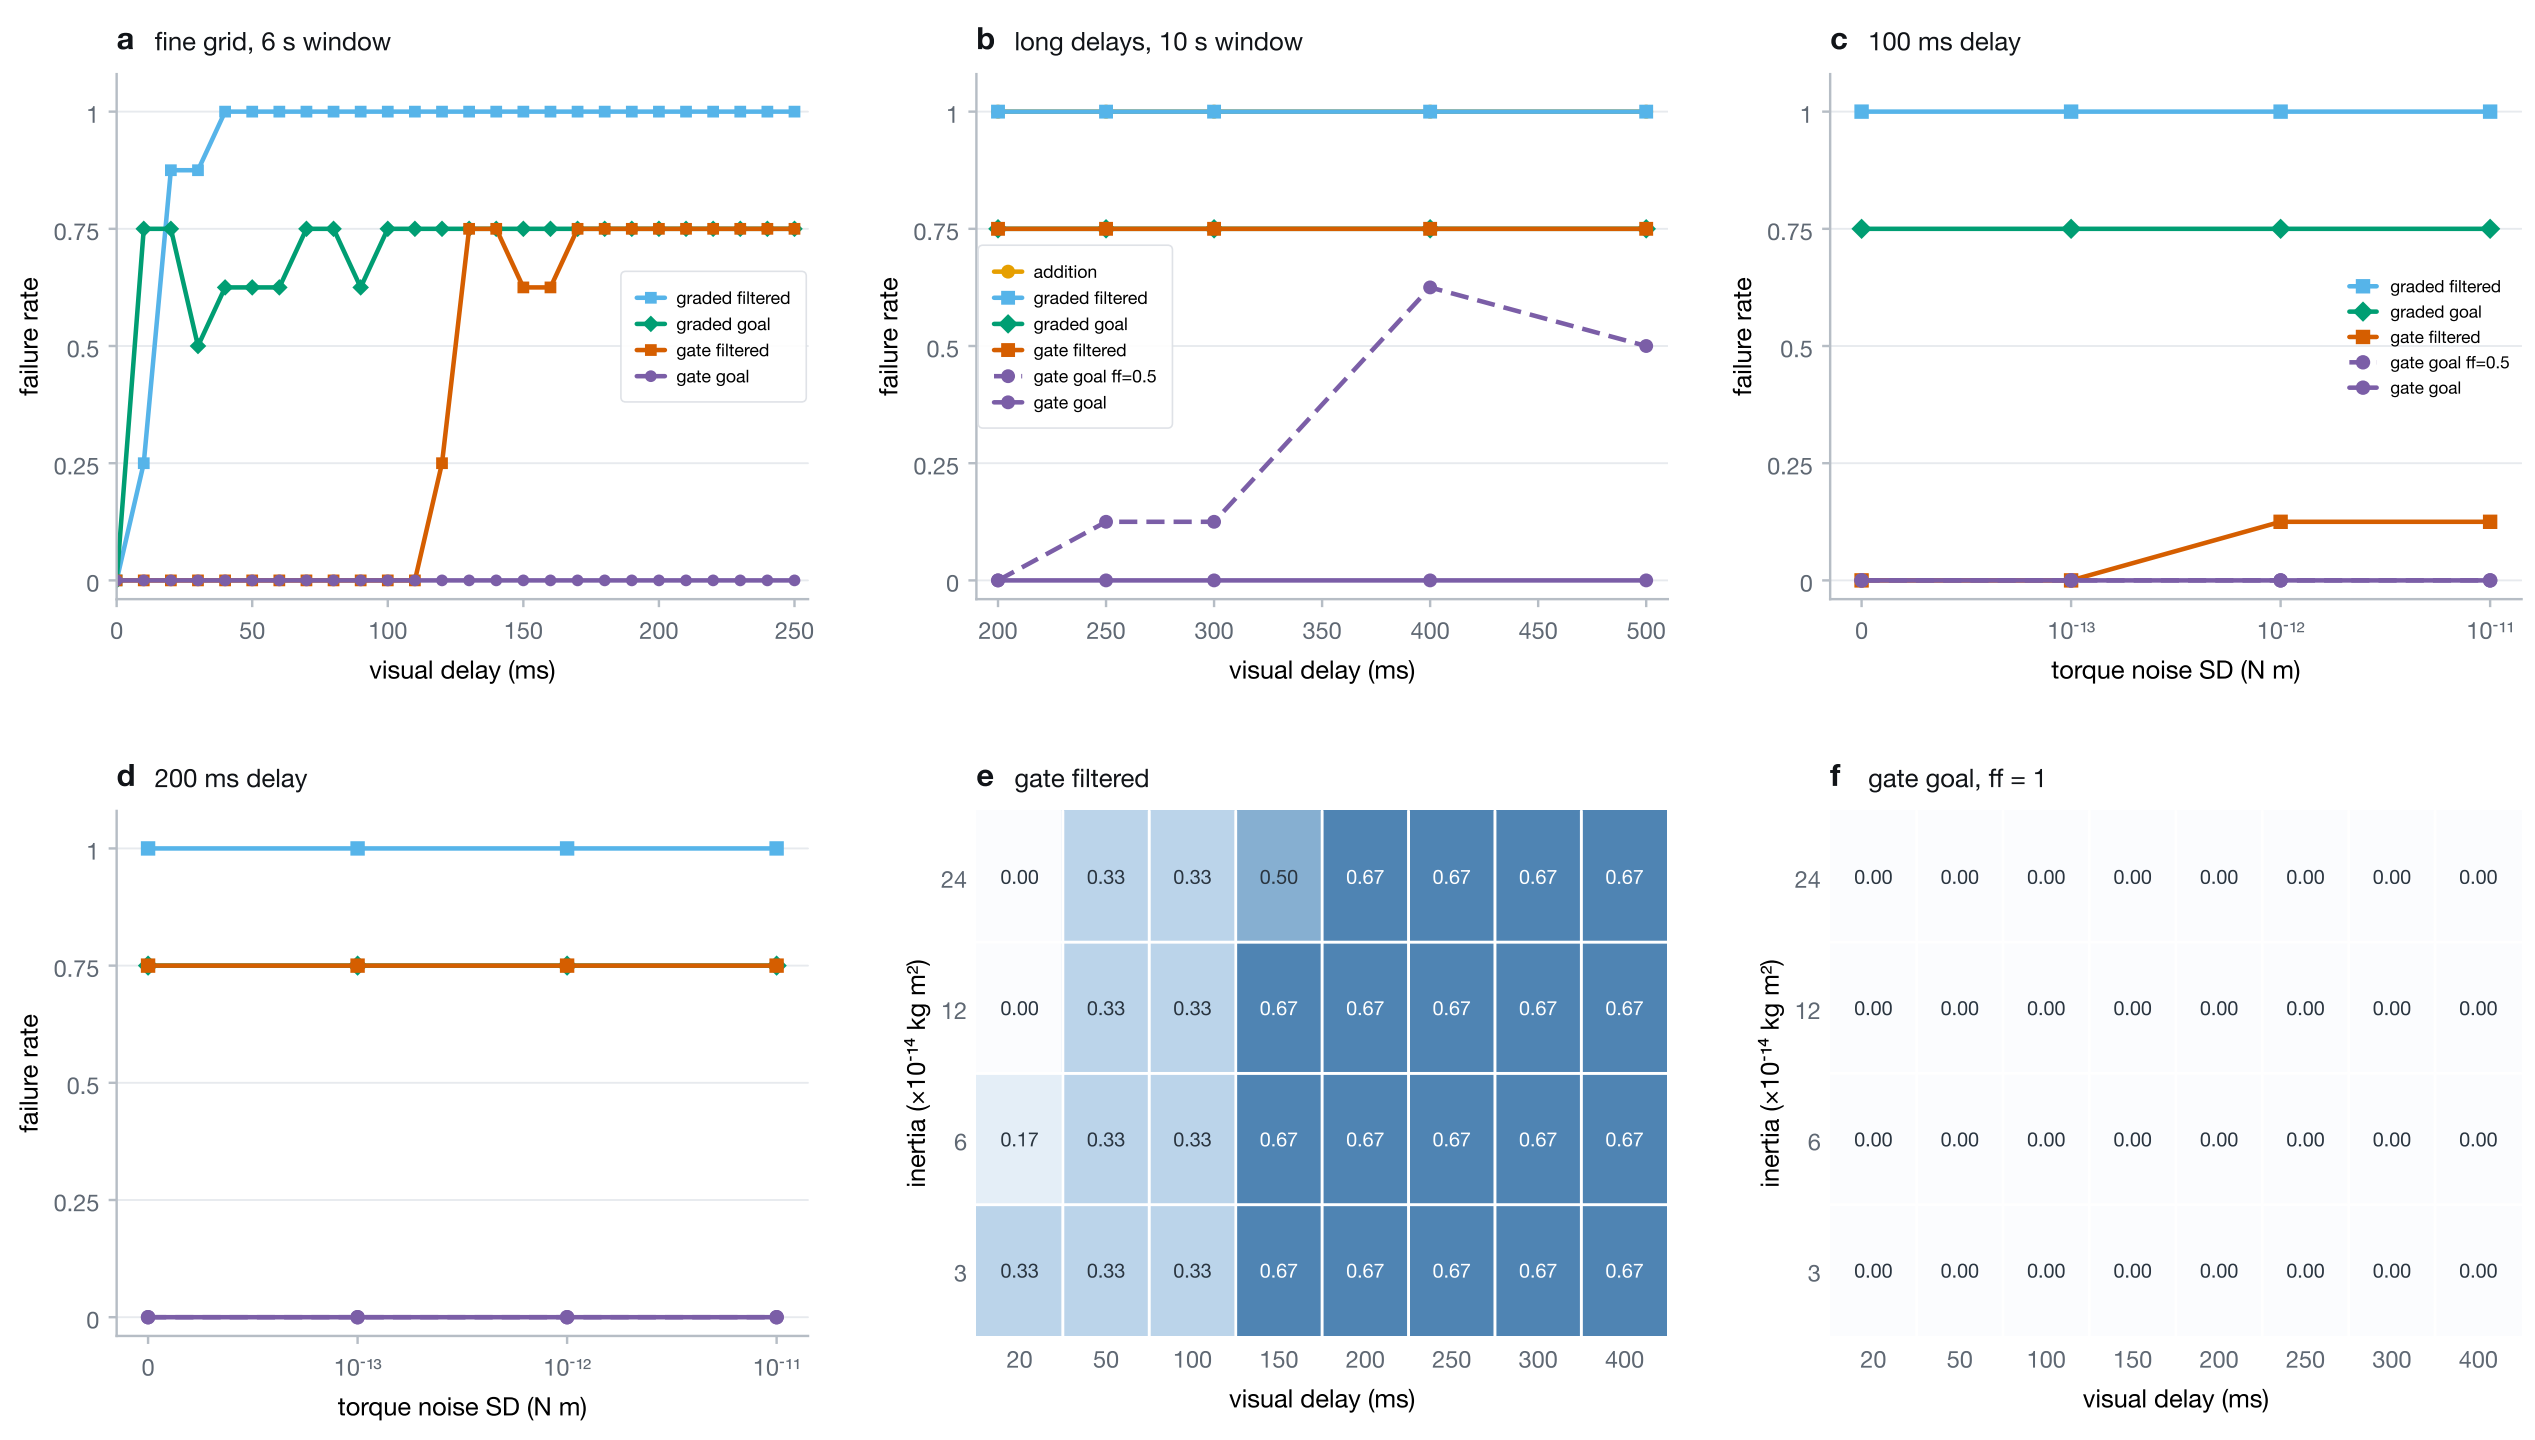
a fine grid, 6 s window
failure rate
visual delay (ms)
graded filtered
graded goal
gate filtered
gate goal
b long delays, 10 s window
addition
graded filtered
graded goal
gate filtered
gate goal ff=0.5
gate goal
c 100 ms delay
torque noise SD (N m)
d 200 ms delay
e gate filtered
inertia (×10⁻¹⁴ kg m²)
f gate goal, ff = 1