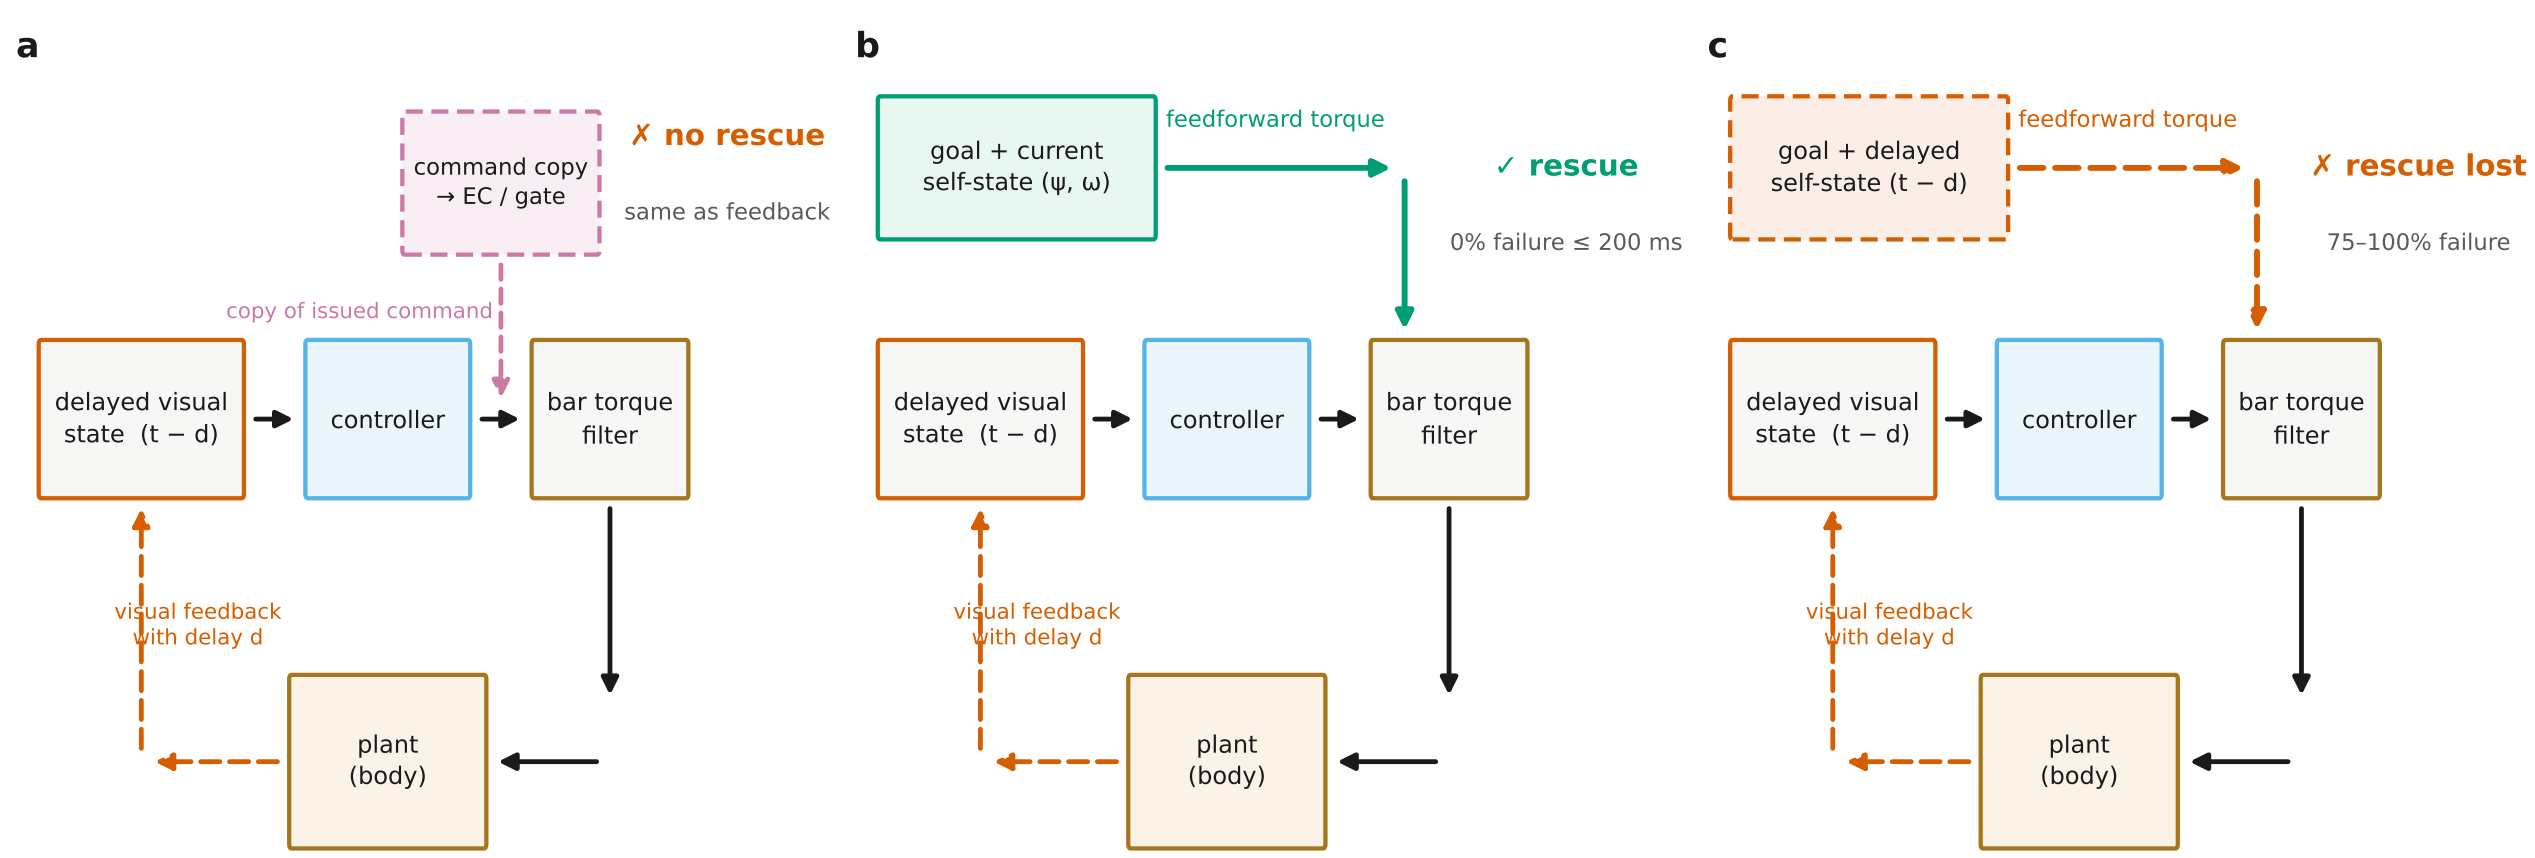
a
command copy
→ EC / gate
✗ no rescue
same as feedback
copy of issued command
delayed visual
state (t − d)
controller
bar torque
filter
visual feedback
with delay d
plant
(body)
b
goal + current
self-state (ψ, ω)
feedforward torque
✓ rescue
0% failure ≤ 200 ms
delayed visual
state (t − d)
controller
bar torque
filter
visual feedback
with delay d
plant
(body)
c
goal + delayed
self-state (t − d)
feedforward torque
✗ rescue lost
75–100% failure
delayed visual
state (t − d)
controller
bar torque
filter
visual feedback
with delay d
plant
(body)