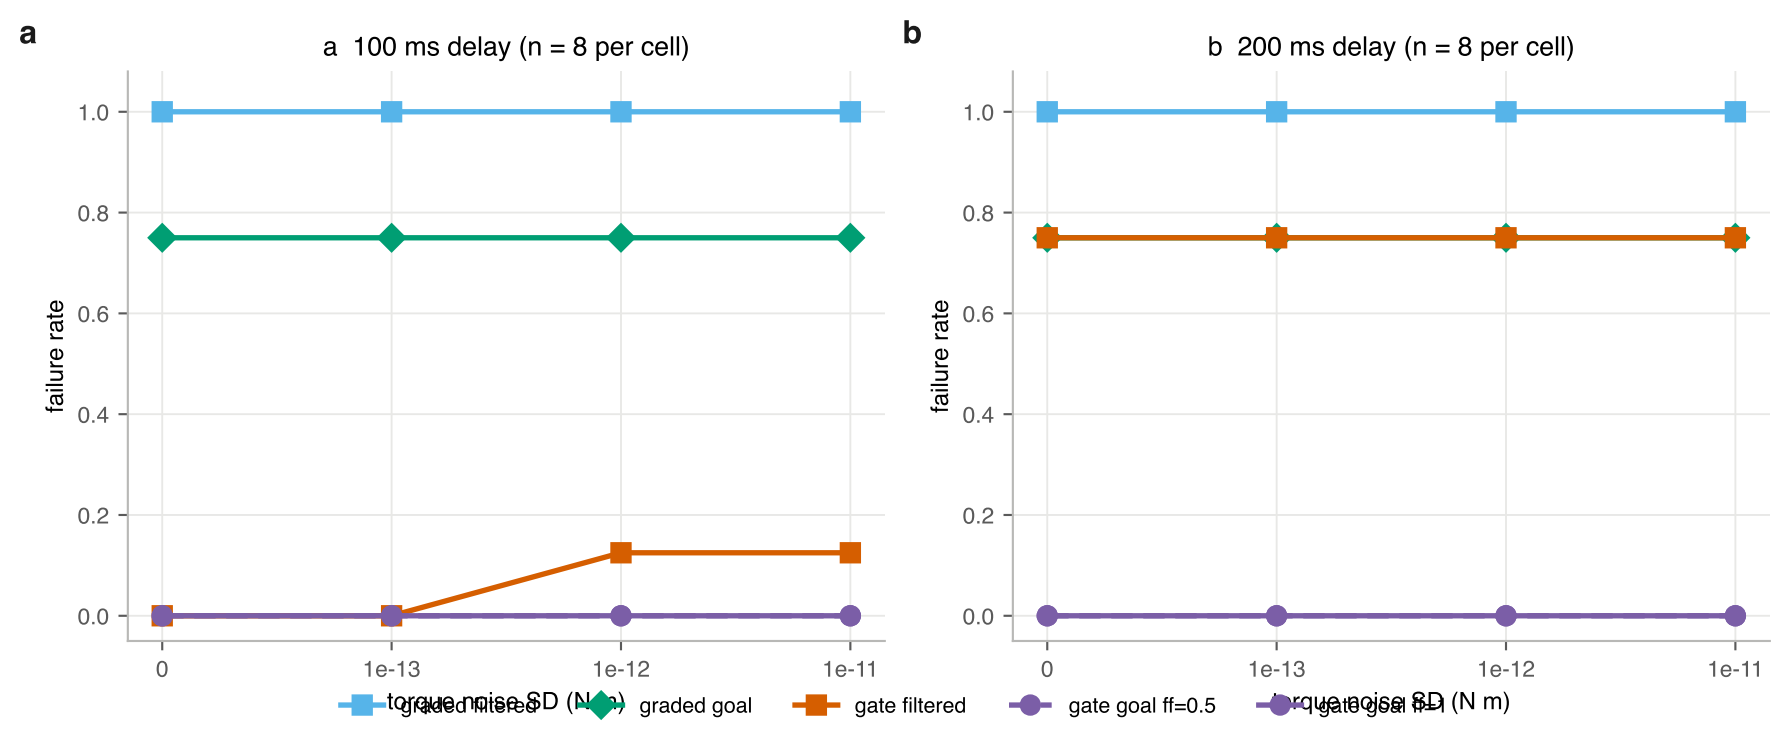
a
a 100 ms delay (n = 8 per cell)
b
b 200 ms delay (n = 8 per cell)
failure rate
1.0
0.8
0.6
0.4
0.2
0.0
0
1e-13
1e-12
1e-11
torque noise SD (N m)
graded filtered
graded goal
gate filtered
gate goal ff=0.5
gate goal ff=1