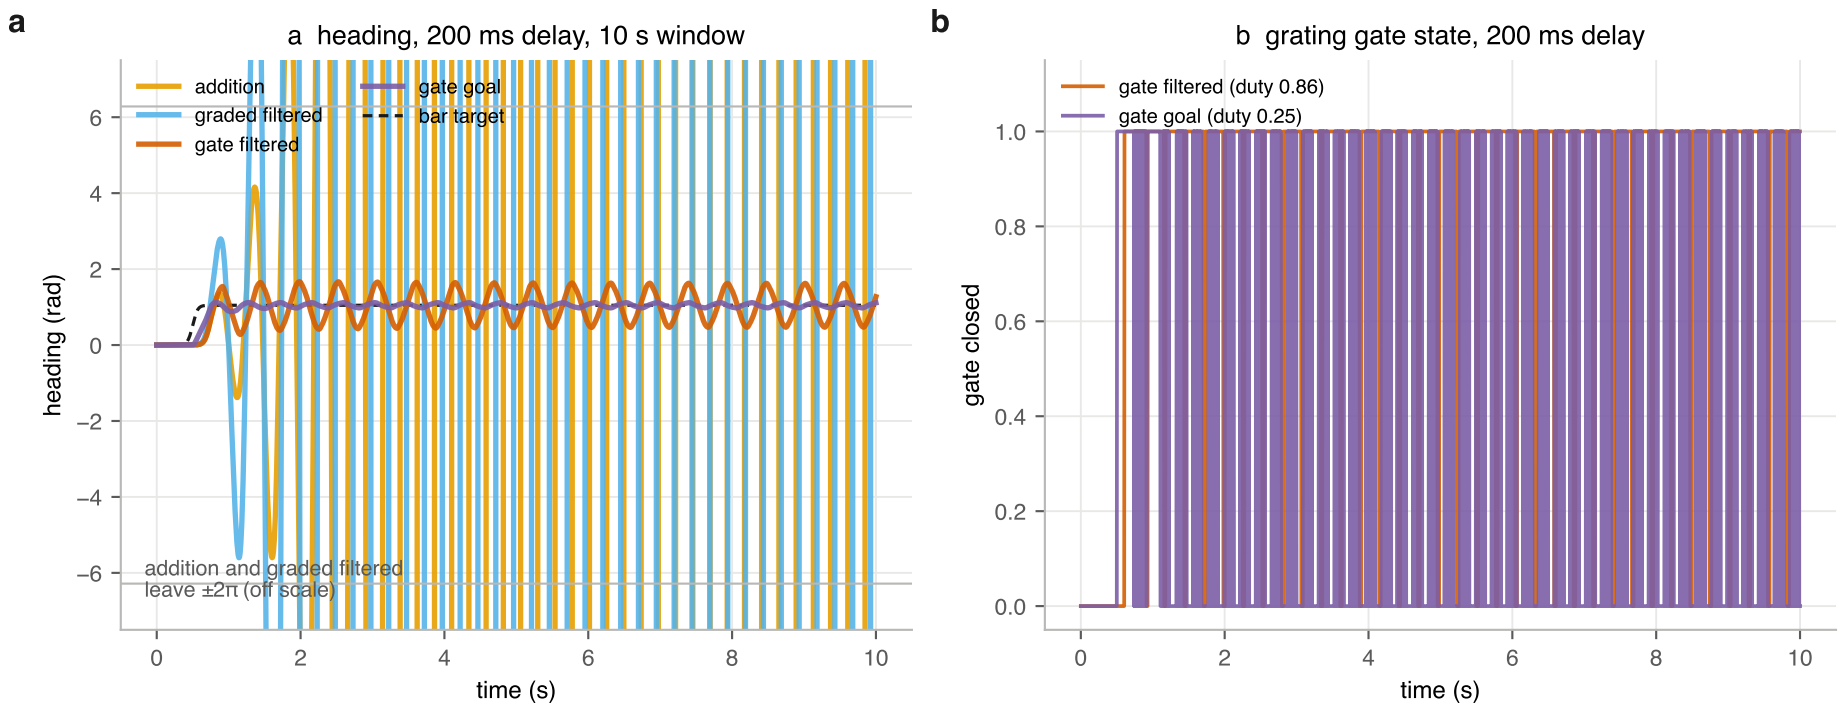
a
a heading, 200 ms delay, 10 s window
addition
graded filtered
gate filtered
gate goal
bar target
addition and graded filtered
leave ±2π (off scale)
heading (rad)
time (s)
b
b grating gate state, 200 ms delay
gate filtered (duty 0.86)
gate goal (duty 0.25)
gate closed
time (s)