

---

# AN1078 Demonstration ReadMe for the dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board with the dsPIC33EP256MC506 External Op-Amp Motor Control PIM (MPLAB® X IDE)

---

## 1. INTRODUCTION

This document describes the setup requirements for running the Sensor-less FOC algorithm with a Slide Mode Controller Estimator, which is referenced in AN1078 “*Sensorless Field Oriented Control of PMSM Motors using dsPIC DSC*”.

The demonstration is configured to run on either the dsPICDEM™ MCHV-2 Development Board or the dsPICDEM™ MCHV-3 Development Board in the External Op-amp configuration with the dsPIC33EP256MC506 External Op-Amp Motor Control Plug-In Module (PIM).

## 2. SUGGESTED DEMONSTRATION REQUIREMENTS

### 2.1. Motor Control Application Firmware Required for the Demonstration

- AN1078\_dsPIC33EP256MC506\_EXT\_INT\_OPAMP\_MCLV2\_MCHV2\_MCHV3.zip

**Note:**

In this document, hereinafter this firmware package is referred as firmware.

### 2.2. Software Tools Used for Testing the firmware

- MPLAB® X IDE v5.40
- MPLAB® XC16 Compiler v1.50
- MPLAB® X IDE Plugin: Latest version of X2CScope Plug-in

**Note:**

The software used for testing the firmware prior to release is listed above. It is recommended to use the version listed above or later versions for building the firmware.

### 2.3. Hardware Tools Required for the Demonstration

To set up the demonstration, you may use one of the High-Voltage Motor Control Development Boards mentioned below:

- dsPICDEM™ MCHV-2 Development Board (DM330023-2) or
- dsPICDEM™ MCHV-3 Development Board (DM330023-3)

**Note:**

In this document, hereinafter High-Voltage Motor Control Development Board selected for setting up the demonstration is referred as Development Board.

- High Voltage 3-Phase Permanent Magnet Synchronous Motor (AC300025)
- dsPIC33EP256MC506 External Op-Amp Motor Control Plug-in module (MA330031-2)

**Note:**

All items listed under the section [2.3. Hardware Tools Required for the Demonstration](#) are available at [microchip DIRECT](#).

## AN1078 Demonstration ReadMe:




### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

#### 3. HARDWARE SETUP

This section describes hardware setup required for the demonstration. Motor phase current feedbacks needed by the firmware are amplified by the operational amplifiers provided on the Development Board. This is referred as 'External Amplifier Configuration'.

Refer *dsPICDEM™ MCHV-2 Development Board User's Guide* or *dsPICDEM™ MCHV-3 Development Board User's Guide*, for any clarification while setting up the hardware.

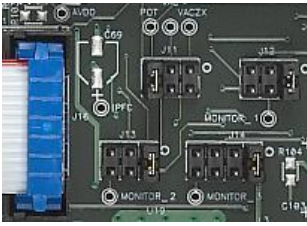1. **Before making any connection, verify that the Development Board is not powered, and it is fully discharged. This can be done by checking if Power on Status LED D13(Red) is off.**
2. Open the top cover of the enclosure and set up the following jumpers (if they are not in specified positions):

Jumper	Pins to Short	Board Reference	Remarks
J11	Don't Care		These Jumpers are present on the Development Board. <i>These can be accessed only after opening the top cover of the enclosure.</i>
J12	1-2		
J13	1-2		
J14	Don't Care		
PWM OUTPUTS	ENABLE position		These Jumpers can be accessed without opening the enclosure, from the front side of the board(or enclosure).
USB	FOR USB position		

3. Connect the three phase wires from the motor to M1, M2, and M3 terminals of connector J17(there is no specific order), provided on the Development Board.



## AN1078 Demonstration ReadMe:

### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

4. Connect the 'External Op Amp Configuration Matrix board' to matrix board header J4. Ensure the matrix board is correctly oriented before proceeding.



5. Insert the dsPIC33EP256MC506 External Op-Amp Motor Control PIM into the PIM Socket U11 provided on the Development Board. Make sure the PIM is correctly placed and oriented before proceeding.
6. Close the top cover of the enclosure and secure it with screws.
7. Power Cord Connection. Make sure the power cord is disconnected from the AC mains before connecting the female terminal of the power cable to the AC input connector J1 of the Development Board.



8. To program the device, a mini-USB connection is required between Host PC and the Development Board. Connect a mini-USB cable from your computer to the mini-USB connector "PROGRAM/DEBUG" of the Development Board. The development board features a Built-in isolated Programmer or Debugger (Microchip Starter Kit).



9. Power up the Development Board by connecting power cord to the mains. To verify the unit is powered, make sure LEDs D6, D13, D16 and D18 are ON.

## 4. SOFTWARE SETUP AND RUN

### 4.1. Setup: MPLAB X IDE and MPLAB XC16 Compiler

Install MPLAB X IDE and MPLAB XC16 Compiler versions that support the device dsPIC33EP256MC506 assembled on the Plug-in Module (PIM). The version of the MPLAB X IDE, MPLAB XC16 Compiler and X2C plugin used for testing the firmware are mentioned in the section [Motor Control Application Firmware Required for the Demonstration](#). To get help on


- MPLAB X IDE installation, refer [link](#)
- MPLAB XC16 Compiler installation steps, refer [link](#)

If MPLAB IDE v8 or earlier is already installed on your computer, then run the MPLAB driver switcher (It is installed when MPLAB X IDE is installed) to switch from MPLAB IDE v8 drivers to MPLAB X IDE drivers. If you have Windows 7 or 8 or 10, you must run MPLAB driver switcher in 'Administrator Mode'. To run the Device Driver Switcher GUI application as administrator, right click on the executable (or desktop icon) and select 'Run as Administrator'. For additional details refer MPLAB X IDE help topic *"Before You Begin: Install the USB Device Drivers (For Hardware Tools): USB Driver Installation for Windows Operating Systems"*.

### 4.2. Setup: X2C - SCOPE

X2C - SCOPE is a MPLAB X IDE plugin that allows a developer to interact with an application while the application program is running. X2C-Scope enables you to read, write, and plot global variables (for motor control) in real time. It communicates with the target using the UART. To use X2C, the plugin must be installed:

- In MPLAB X IDE, select **Tools>Plugins** and click on the **Available Plugins** tab.
- Select X2C - SCOPE plug-in by checking its check box, and then click **Install**.
- Look for tool X2C - SCOPE under **Tools>Embedded**.

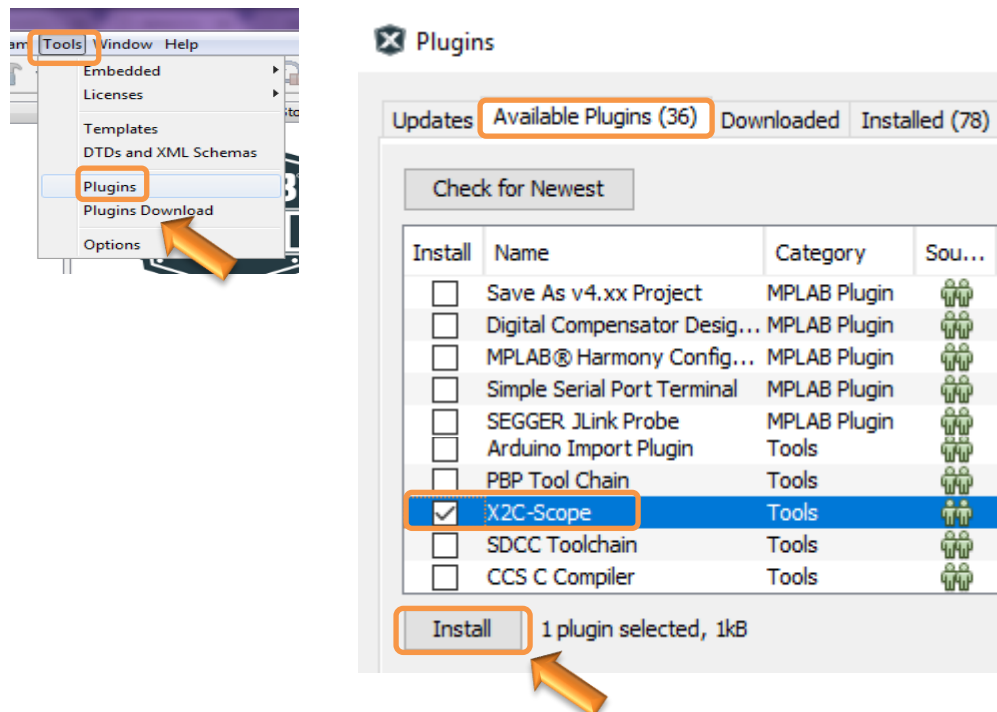

## **5. BASIC DEMONSTRATION**

### **5.1. Firmware Description**

The firmware version required for the demonstration is mentioned under the section [Motor Control Application Firmware Required for the Demonstration](#).

This firmware is implemented to work on Microchip's 16-bit Digital signal controller (dsPIC® DSC) dsPIC33EP256MC506. For more information, see the *dsPIC33EP256MC506 Family datasheet (DS70000657J)*.

The Motor Control Demo application uses push button to start or stop the motor and potentiometer to vary speed of the motor.

This Motor Control Demo Application configures and uses peripherals like PWM, ADC, UART etc. required for implementing Sensor-less Field Oriented Control (FOC) of Permanent Magnet Synchronous Motor (PMSM) based on the motor control application AN1078.

For more details refer Microchip Application note AN1078 “*Sensorless Field Oriented Control of a PMSM*” available at [Microchip web site](#)

#### **Note:**

The project may not build correctly in Windows OS if Maximum path length of any source file in the project is more than 260 characters. In case absolute path is exceeding or nearing maximum length, do any (or both) of the following:

- Shorten the name of the directory containing the firmware used in this demonstration. In this case, rename directory *AN1078\_dsPIC33EP256MC506\_EXT\_INT\_OPAMP\_MCLV2\_MCHV2\_MCHV3* to more appropriate shorter name. In case you renamed the directory, consider the new name while reading instructions provided in the upcoming sections of the document.
- Place firmware in a location, such that absolute path length of each file included in the projects does not exceed the Maximum Path length specified.

For details, refer MPLAB X IDE help topic “*Path, File and Folder Name Restrictions*”.

## AN1078 Demonstration ReadMe:


### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

#### 5.2. Basic Demonstration


Follow below instructions step by step to setup and run the motor control demo application:

1. Start MPLAB X IDE and open (File>Open Project) the project *pmsm.X* (`...\AN1078_dsPIC33EP256MC506_EXT_INT_OPAMP_MCLV2_MCHV2_MCHV3\pmsm.X`) with device selection *dsPIC33EP256MC506*

MPLAB X IDE v5.40 - pmsm : MCHV2\_MCHV3

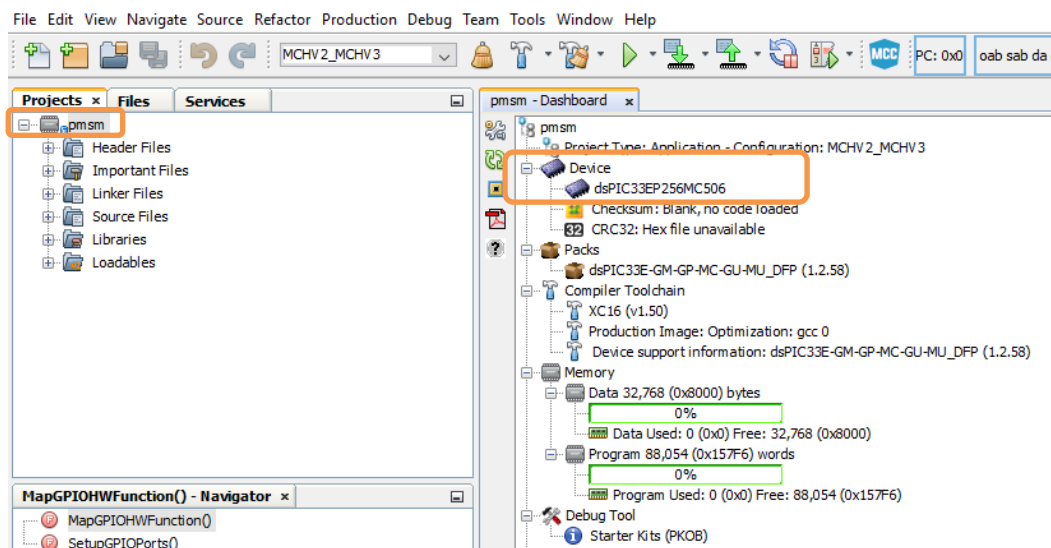


2. Set the project *pmsm.X* as main project by right clicking on the project name and selecting "Set as Main Project" as shown. The project "pmsm" will then appear in **bold**.

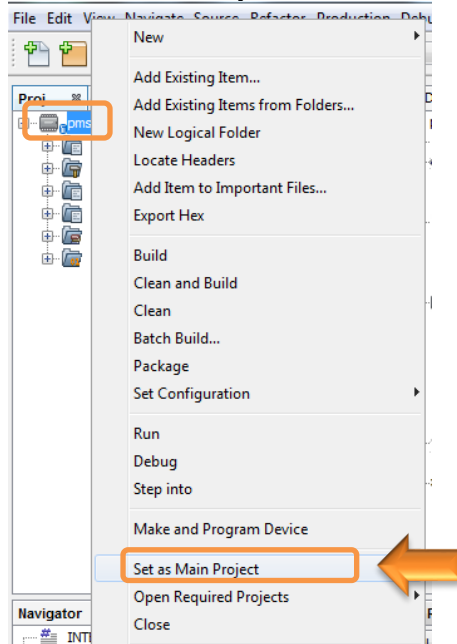

3. Select project configuration as "MCHV2\_MCHV3" from the Project Configuration drop down box on the toolbar as shown:

MPLAB X IDE v5.40 - pmsm : MCHV2\_MCHV3

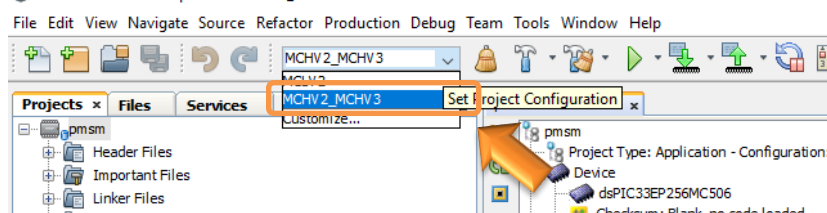




## AN1078 Demonstration ReadMe:

### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

As shown in the figure above, there may be multiple project configurations available for *pmsm.X*.

4. Open `userparams.h` (under *pmsm.X* -> `headerfiles`) in the project *pmsm.X* and ensure that `TUNING`, `OPEN_LOOP_FUNCTIONING`, `TORQUE_MODE` are not defined.
5. Open `pim_select.h` (under *pmsm.X*->`headerfiles`->`hal`) in the project *pmsm.X* and ensure the macro definition `INTERNAL_OPAMP_PIM` is undefined as this demonstration is for External Op-Amp configuration.

MPLAB X IDE v5.40 - pmsm : MCHV2\_MCHV3

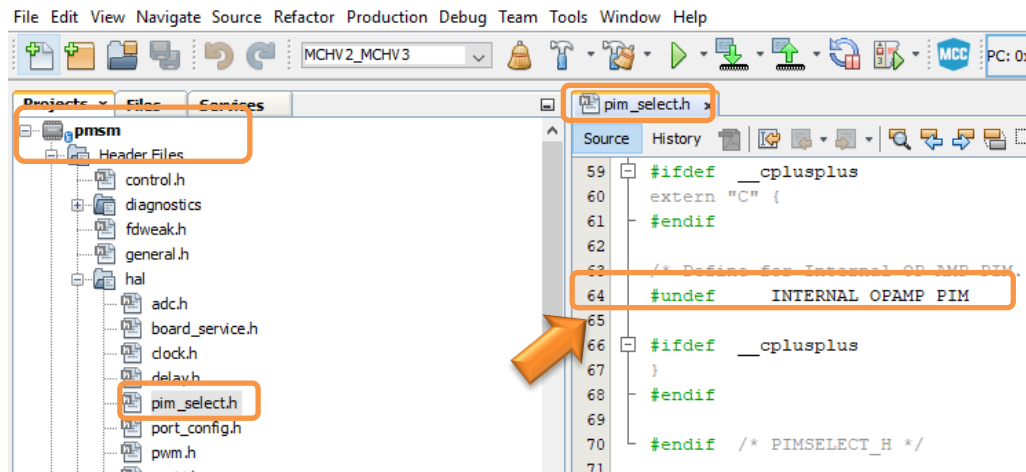


6. Right click on the project *pmsm.X* and select "Properties" to open its Project Properties Dialog. Click the "Conf: [MCHV2\_MCHV3]" category to reveal the general project configuration information.

In the '**Conf-MCHV2\_MCHV3**' category window:

- Select the specific Compiler Toolchain from the available list of compilers. Please ensure MPLAB® XC16 Compiler supports the device dsPIC33EP256MC506. In this case "XC16(v1.50)" is selected. The compiler used for testing the firmware is listed in the section [2.2 Software Tools Used for Testing the firmware](#).
- Select the Hardware Tool to be used for programming and debugging. In this case, "MCHV-SK" is selected as the programmer from Microchip Starter Kits section.
- After selecting Hardware Tool and Compiler Toolchain, click button **Apply**.


MPLAB X IDE v5.40 - pmsm : MCHV2\_MCHV3

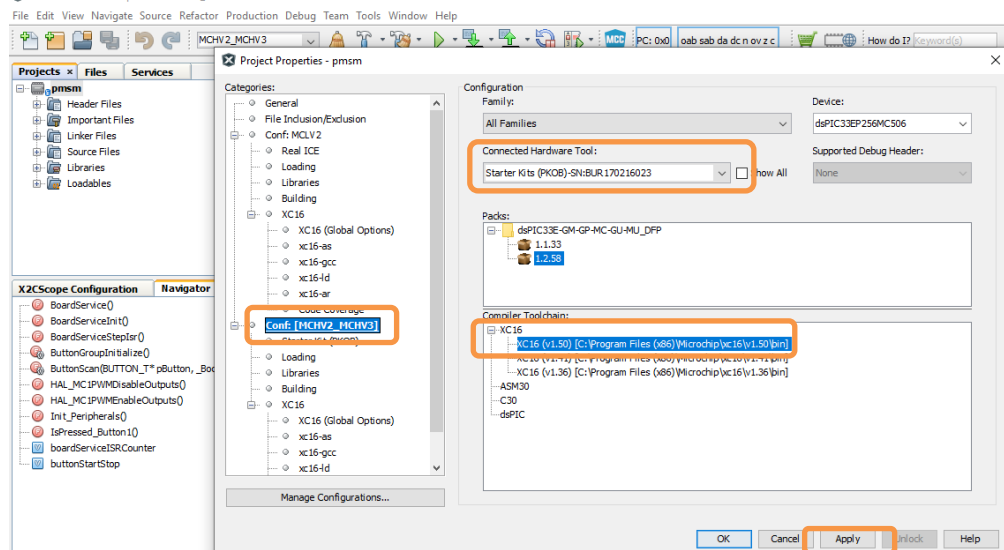

## AN1078 Demonstration ReadMe:

### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

7. To build the project (in this case *pmsm.X*) and program the device dsPIC33EP256MC506, click “**Make and Program Device Main project**” on the toolbar.

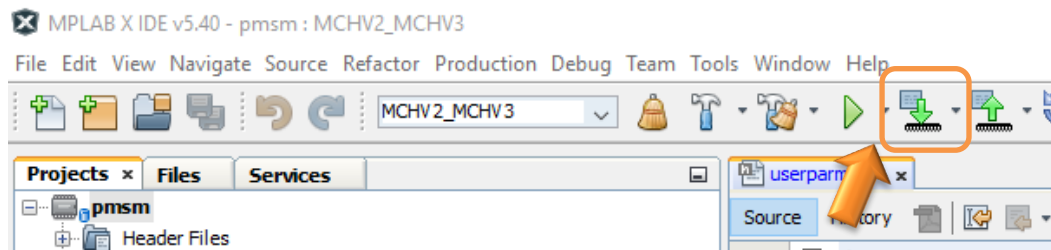

8. If the device is successfully programmed, **LED D2** will be turned ON, indicating that the dsPIC® DSC is enabled.
9. Run or Stop the motor by pressing the push button **S1**(labeled as “**PUSHBUTTON**”) on the front panel of the Board. The function of the pushbutton (Run/Stop of the motor) is indicated by turning ON or OFF **LED D19**.



10. If desired, the motor speed can be varied using the potentiometer (labeled “**POT**”).



11. Press push button **S1**(labeled as “**PUSHBUTTON**” on the front panel of the Board) to stop the motor.

#### Note:

The macro definitions `END_SPEED_RPM`, `NOMINAL_SPEED_RPM`, and `MAXIMUM_SPEED_RPM` are specified in `userparms.h` file included in the project *pmsm.X*. The definitions `NOMINAL_SPEED_RPM`, and `MAXIMUM_SPEED_RPM` are defined as per the specification provided by the Motor manufacturer. *Exceeding manufacture specification may lead to damage of the motor or(and) the board.*



## AN1078 Demonstration ReadMe:


### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

## 6. Data visualization through X2CScope Plug-in of MPLABX

The application firmware comes with initialization required to interface Controller with Host PC to enable Data visualization through X2C Scope plug-in. X2C-Scope is a third-party plugin for MPLAB X which facilitates real-time diagnostics.

1. Ensure X2C Scope Plug-in is installed. For additional information on how to set up a plug-in refer to

<https://microchipdeveloper.com/mplabx:tools-plugins-available>

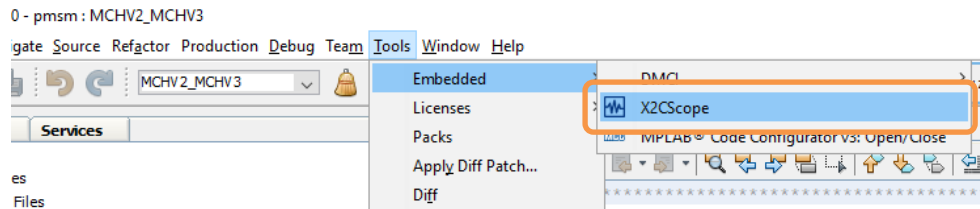


2. To utilize X2C communication for this demonstration, a mini-USB connection is required between Host PC and dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board. Connect a mini-USB cable from your computer to the J6 connector (labeled as “USB” on the front panel of the board enclosure) of the Development Board and install USB drivers if necessary.




3. Ensure application is configured and running as described under Section [Basic Demonstration](#) by following steps 1 through 12.

4. Build the project *pmsm.X*. To do that right click on the project *pmsm.X* and select “Clean and Build” or click on the “Clean and Build” icon in the toolbar.

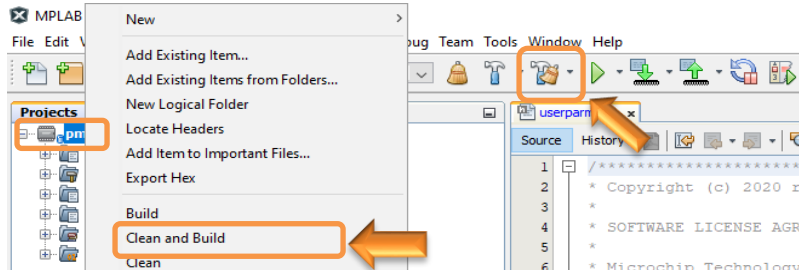


5. Please ensure that the checkbox “Load symbols when programming or building for production (slows process)” is checked, which is under the “Loading” category of the Project Property dialog.

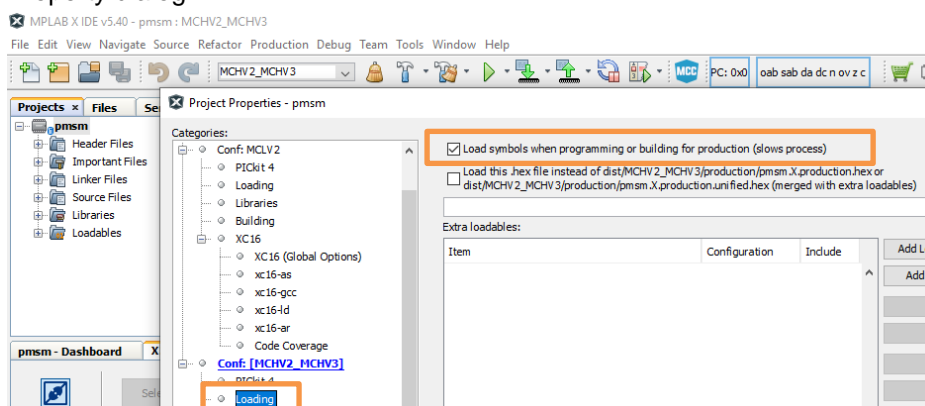


## AN1078 Demonstration ReadMe:

### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board


6. To build the project (in this case *pmsm.X*) and program the device dsPIC33EP256MC506, click “**Make and Program Device Main project**” on the toolbar.

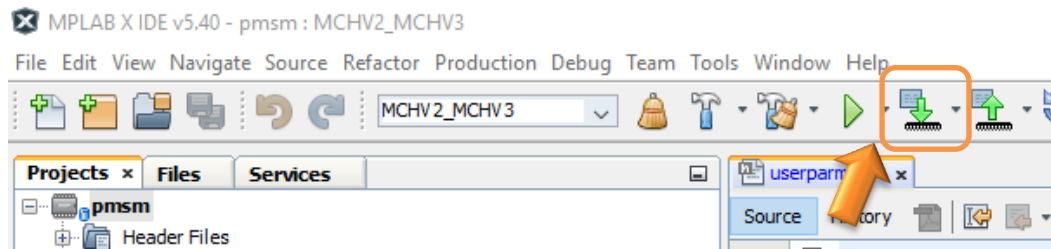

7. Open the X2C window by selecting Tools>Embedded>X2CScope.

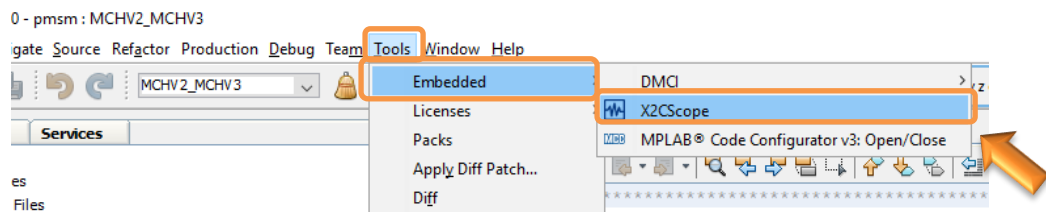


8. Open the X2CScope Configuration window and in “Select project” menu, select pmsm.X project as shown.

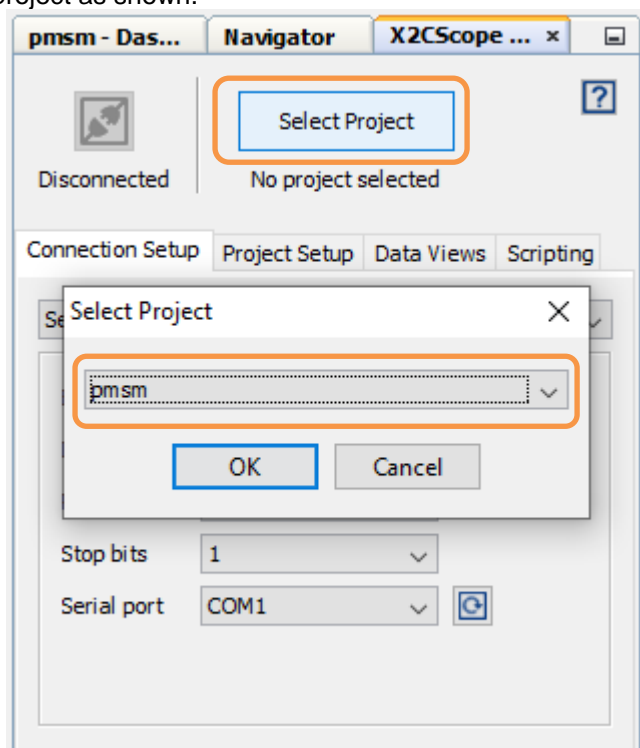


9. Remote Communication needs to be established, as indicated in the following figure (the communication baud rate should be set to 115200, while COM port used depends on your settings. Click on Refresh button to detect COM Port automatically.

## AN1078 Demonstration ReadMe:


### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

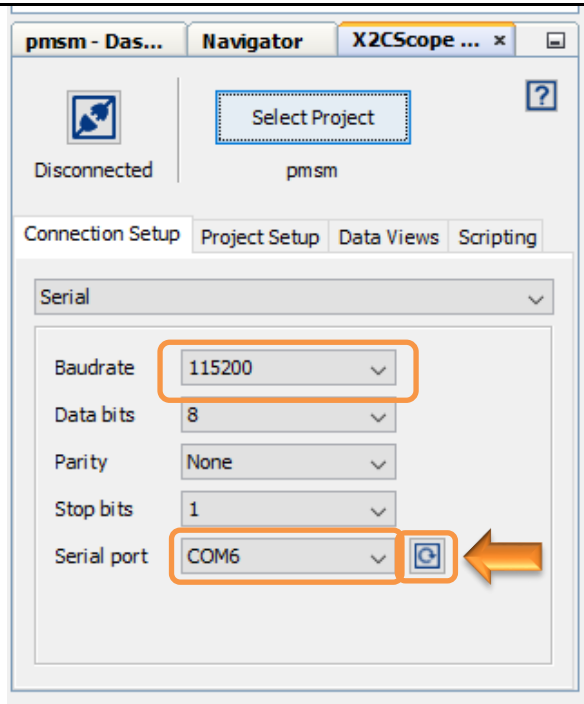

10. Once COM port detected, click on “**Disconnected**”, and it will be turn into “**Connected**”, if the link is established as programmed.

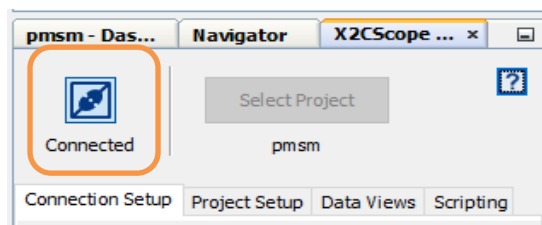


11. Set the “Project Setup” as shown below and click “Set Values”. Set Scope sampling time as interval at which X2CScopeUpdate() is called. In this application it is every 20kHz (50Us).

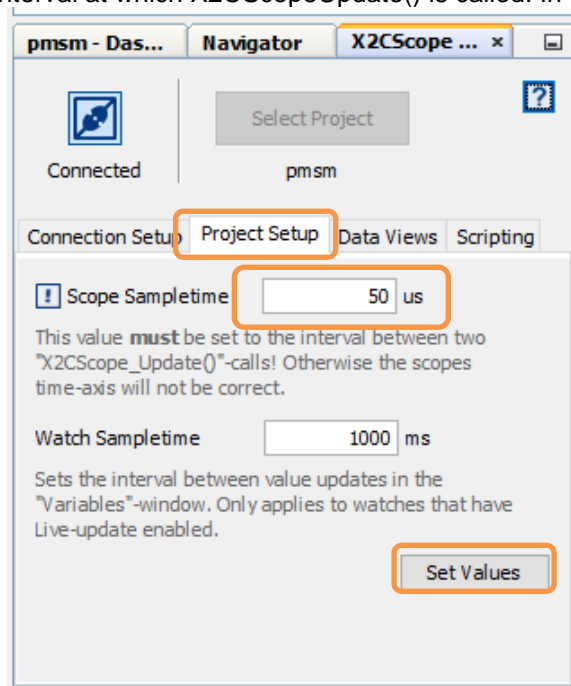

## AN1078 Demonstration ReadMe:


### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

- When the setup is established, click on open scope View (under sub window "Data Views"), this open Scope Window.

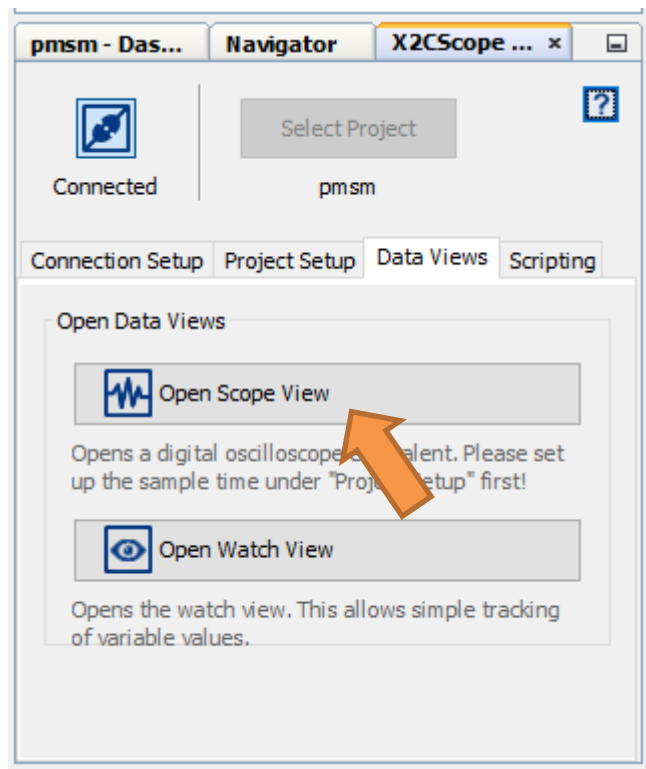


- In the window select the variables user may want to watch. Click on the source, a window Select Variables opens upon the screen. From the select variables list, choose the variable that you want to view. Then ensure Enable, Visible check boxes are checked as shown.

To view data plots continuously uncheck Single-shot. When Single-shot is checked it captures the data once and stops, if trigger occurs. Change the Sample time factor value to change the time window.

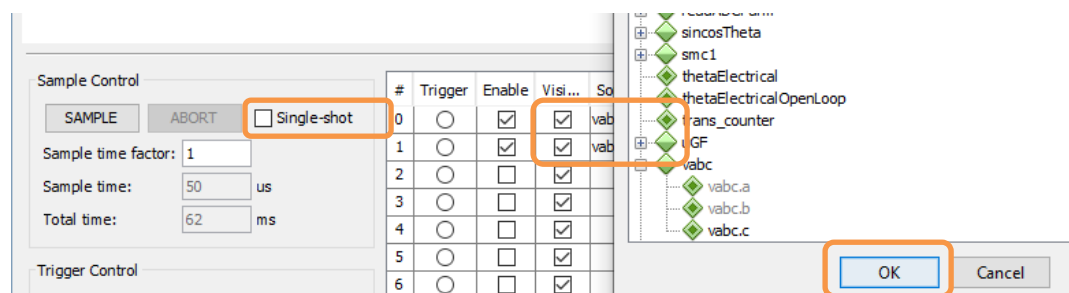


- Click on SAMPLE, then X2C scope window shows variables in real time, which is updated automatically.

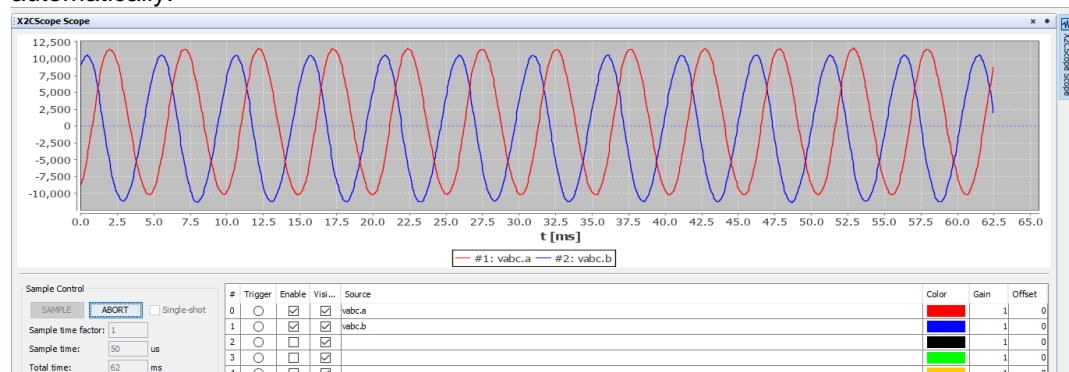

## AN1078 Demonstration ReadMe:

### dsPICDEM™ MCHV-2 Development Board or dsPICDEM™ MCHV-3 Development Board

15. Click on ABORT to stop.

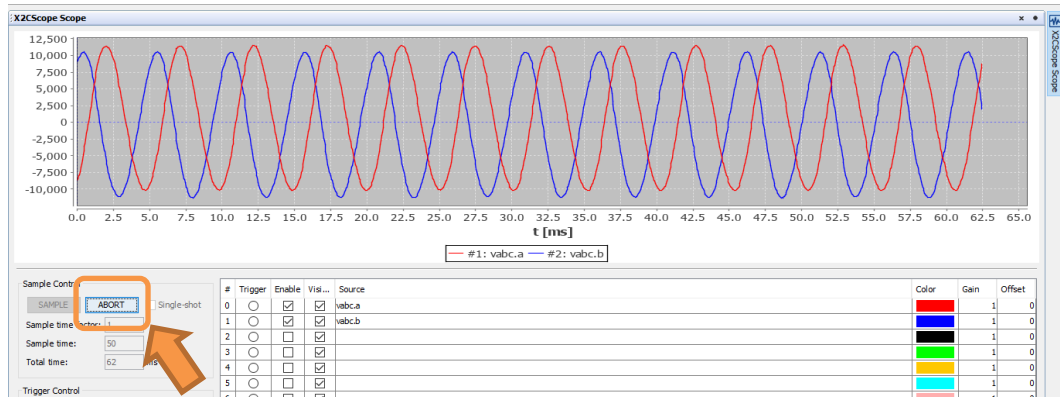

## 7. dsPIC® DSC RESOURCE USAGE SUMMARY

### 7.1. Device Pin Mapping and Its Functionality in the Firmware:

The following table summarizes device pins configured and used in the AN1078 motor control application firmware demonstrated using the Development Board and the dsPIC33EP256MC506 External Op-Amp Motor Control PIM(MA330031-2). Refer “dsPIC33EP256MC506 External Op-Amp Motor Control Plug-in-Module (PIM) Information Sheet (DS52086a)” for more information.

Functional Description	PIM PIN Number	Device PIN Number	Device Pin Name	Signal Type	Remarks
<b>Motor Control PWMs and Fault Input</b>					
PWM1H	PIM:94	2	RPI46/ <b>PWM1H/T3C K/RB14</b>	PWM Output	Controls Hex Bridge MOSFET Q5
PWM1L	PIM:93	3	RPI47/ <b>PWM1L/T5C K/RB15</b>	PWM Output	Controls Hex Bridge MOSFET Q6
PWM2H	PIM:99	62	RPI44/ <b>PWM2H/RB1 2</b>	PWM Output	Controls Hex Bridge MOSFET Q3
PWM2L	PIM:98	63	RPI45/ <b>PWM2L/CTP LS/RB13</b>	PWM Output	Controls Hex Bridge MOSFET Q4
PWM3H	PIM:03	60	RP42/ <b>PWM3H/RB1 0</b>	PWM Output	Controls Hex Bridge MOSFET Q1
PWM3L	PIM:100	61	RP43/ <b>PWM3L/RB11</b>	PWM Output	Controls Hex Bridge MOSFET Q2
FAULT	PIM:18	32	FLT32/SCL2/RP36/ <b>RB4</b>	PWM Input	Connected to Over Current Fault Output
<b>Analog Inputs – Phase Currents, Speed Reference</b>					
POT	PIM:32	28	<b>AN13/C3IN2-/U2CT S/RE13</b>	Analog Input	Speed Reference Connected to Potentiometer POT
IMOTOR1	PIM:42	13	<b>AN0/OA2OUT/RA0</b>	Analog Input	Connected to Motor Phase Current 1 through External Op-Amp Matrix Board and Jumper J12
IMOTOR2	PIM:41	14	<b>AN1/C2IN1+/RA1</b>	Analog Input	Connected to Motor Phase Current 2 through External Op-Amp Matrix Board and Jumper J13
<b>Miscellaneous Signals</b>					
BTN	PIM:68	48	TCK/CVREF1O/AS CL1/RP40/T4CK/ <b>RB 8</b>	Digital Input	Connected to Push Button S1 (labeled “PUSHBUTTON”)
Debug LED2	PIM:60	53	<b>RD5</b>	Digital Output	Connected to LED D19
Debug LED1	PIM:01	54	<b>RD6</b>	Digital Output	Connected to LED D2
RX (UART)	PIM:49	37	SCL1/RPI53/ <b>RC5</b>	UART1 Input	Connected to UART-USB converter to establish serial communication interface between Host PC and the dsPIC® DSC as needed by X2C scope.
TX (UART)	PIM:50	53	RP97/ <b>RF1</b>	UART1 Output	Connected to UART-USB converter to establish serial communication interface between Host PC and the dsPIC® DSC as needed by X2C scope.

## **8. References:**

For additional information, refer following documents or links.

1. AN1078 Application Note “Sensorless Field Oriented Control of a PMSM”
2. dsPICDEM™ MCHV-2 Development Board User’s Guide (DS52074)
3. dsPICDEM™ MCHV-3 Development Board User’s Guide (DS50002505)
4. dsPIC33EP256MC506 External Op-Amp Motor Control Plug-in-Module (PIM) Information Sheet (DS52086a)
5. dsPIC33EP256MC506 Family datasheet (*DS70000657J*).
6. Family Reference manuals (FRM) of dsPIC33EP256MC506 family
7. MPLAB® X IDE User’s Guide (DS50002027) or MPLAB® X IDE help
8. [MPLAB® X IDE installation](#)
9. [MPLAB® XC16 Compiler installation](#)