

## Contents

|  |           |
|--|-----------|
| <b>Contents</b>                            | <b>1</b>  |
| <b>List of Figures</b>                     | <b>1</b>  |
| <b>1 Introduction</b>                      | <b>2</b>  |
| <b>2 Specifications</b>                    | <b>3</b>  |
| <b>3 Operating Information</b>             | <b>4</b>  |
| <b>4 Theory of Operation</b>               | <b>5</b>  |
| 4.1 Block Description . . . . .            | 5         |
| 4.2 Detailed Circuit Description . . . . . | 6         |
| Power Input Circuit . . . . .              | 6         |
| Switching DC-DC Converters . . . . .       | 8         |
| Linear Regulators . . . . .                | 9         |
| Synthesizer . . . . .                      | 9         |
| Synthesizer Output Amplifiers . . . . .    | 10        |
| Output System . . . . .                    | 11        |
| Input System . . . . .                     | 11        |
| Microcontroller . . . . .                  | 12        |
| 4.3 Software Description . . . . .         | 12        |
| Signal Processing . . . . .                | 12        |
| User Interface . . . . .                   | 12        |
| <b>5 Electrical parts</b>                  | <b>13</b> |
| <b>6 Full schematics</b>                   | <b>22</b> |
| <b>References</b>                          | <b>36</b> |

## List of Figures

|    |   |    |
|----|---|----|
| 1  | Block diagram . . . . .                                       | 5  |
| 2  | MOS reverse polarity protection circuit, simplified . . . . . | 6  |
| 3  | UVLO and OVLO circuit . . . . .                               | 6  |
| 4  | Miller integrator . . . . .                                   | 7  |
| 5  | USB power input circuit . . . . .                             | 8  |
| 6  | Basic buck converter circuit . . . . .                        | 8  |
| 7  | 3.3 V buck converter circuit . . . . .                        | 9  |
| 8  | DDS architecture . . . . .                                    | 10 |
| 9  | DDS output circuit . . . . .                                  | 10 |
| 10 | Output amplifier for synthesizer . . . . .                    | 10 |
| 11 | GaAs switch circuit . . . . .                                 | 11 |
| 12 | GaAs control circuit . . . . .                                | 11 |
| 13 | Input buffer circuit . . . . .                                | 12 |

## 1 Introduction

## 2 Specifications

### **3 Operating Information**

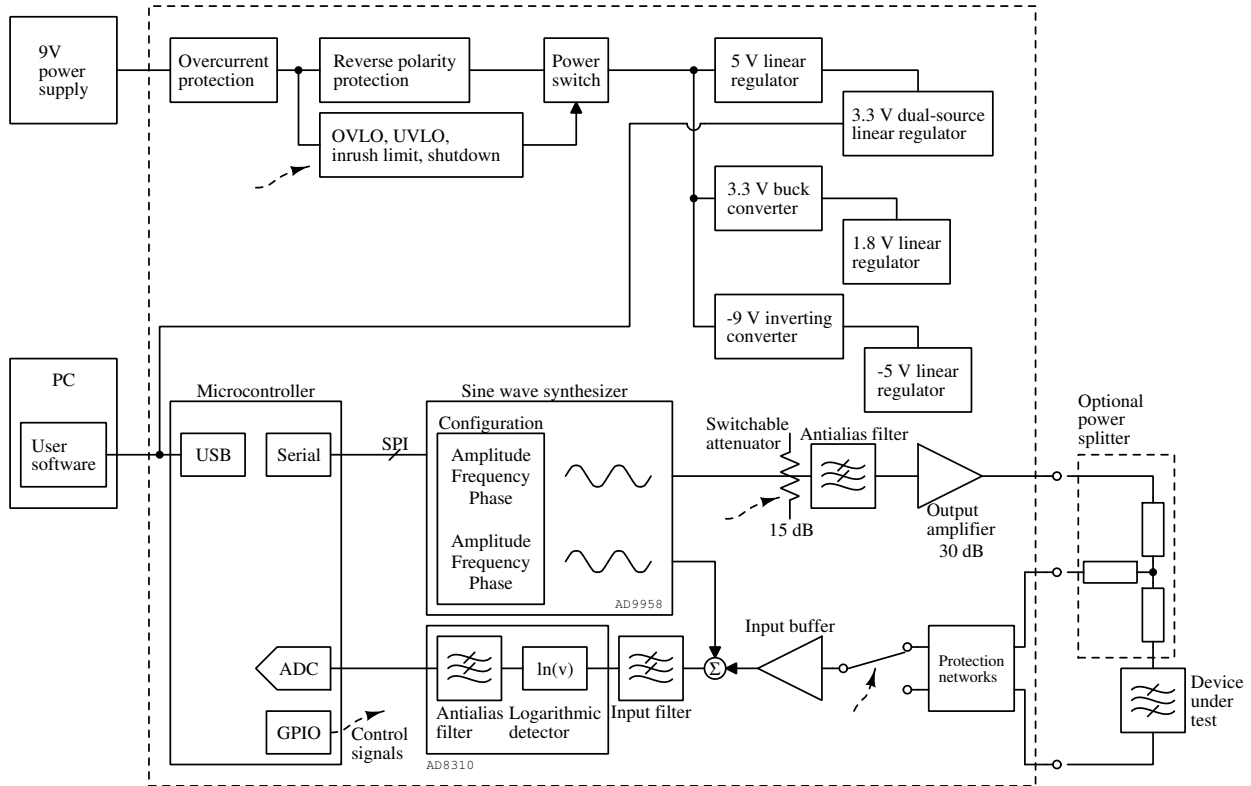


Figure 1: Block diagram

## 4 Theory of Operation

This section contains a description of the operation of the gain/phase analyzer. Explanations range from simple and broad to very specific. It is expected that the reader has an understanding of the basics of gain/phase analysis itself, which is explained in the [Introduction chapter](#).

Also, it will be beneficial to look at the main system schematics when reading through this section. Small pieces of the schematic are excerpted when helpful in explaining their function, but are not always shown.

### 4.1 Block Description

Relevant schematic page: [BlockDiagram/1](#)

The block diagram is shown in figure 1. A microcontroller drives the instrument, configuring a dual sine wave synthesizer via a serial interface. The first output passes through an optional, switchable attenuator, allowing output amplitude to be configured beyond the practical amplitude range of the synthesizer. The signal is then filtered

to attenuate Nyquist aliasing, and then amplified by 30 dB before being passed to the output.

Signals returning from the Device Under Test (DUT) pass through input protection networks, then enter a double-throw RF switch allowing one of them to be analyzed. An input buffer prevents signals from further circuitry from feeding back out the input and affecting the DUT. A summing network combines the input signal with the second output of the synthesizer, and the sum passes through an input filter and into a logarithmic detector. The logarithmic detector outputs a voltage corresponding to the signal amplitude in decibels, and this is further filtered to allow slow sampling, and returns to the microcontroller via the on-chip analog to digital converter.

A power supply system provides overcurrent protection, reverse polarity protection, overvoltage lockout, undervoltage lockout, inrush limiting, and microcontroller-driven shutdown (used in cases of USB suspend). It produces regulated voltage rails of +9 V and -9 V (for the final output amplifier stage), +5 V and -5 V (for general linear circuitry), +3.3 V (for the synthesizer), +1.8 V (for the synthesizer), and a second, weaker +3.3 V rail that can be powered by the USB port in the absence of the main power input (for the microcontroller).

A USB interface connects to a computer, where software sends control commands to the instrument and plots received data.

## 4.2 Detailed Circuit Description

### Power Input Circuit

Relevant schematic page: [PowerInput/11](#)

This instrument is complex and has many somewhat expensive parts, so a full input subsystem was designed to ensure that these parts are always supplied correctly with power. This subsystem provides the following features:

- Overcurrent protection
- Reverse polarity protection
- Undervoltage lockout
- Overvoltage protection
- Inrush current limiting

### Overcurrent protection

The first piece of this input system, and possibly the simplest, is R81. R81 is a *resettable fuse*, a type of resistor with a positive temperature coefficient. Its resistance is very low (around  $0.5\ \Omega$ ) at room temperature. As the current flowing through it increases, it heats up, and as it heats up, its resistance increases. Eventually, it will reach a point where this process ‘snowballs’, and its resistance is high enough that almost no current can flow through it. This allows it to act like a fuse, but without permanently blowing: as soon as it cools back down, it will conduct again.

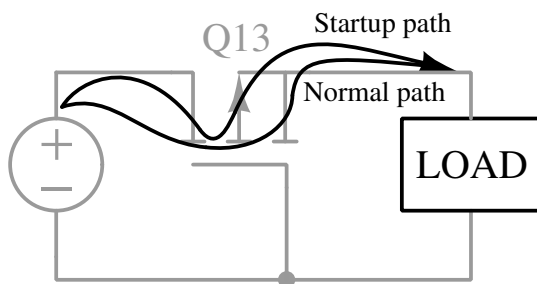


Figure 2: MOS reverse polarity protection circuit, simplified

### Reverse polarity protection

Once input current has passed through the resettable fuse, it encounters Q13. A simplified form of this part of the circuit can be seen in figure 2. Remember that a MOSFET has ‘parasitic’ diodes connected from the transistor’s channel to its substrate; in a standard power MOSFET, one ends up connected between the two ends of the channel (the other ends up shorted to itself). In a P-channel MOSFET, this diode points from the source to the drain. In this circuit, when power is applied with the correct polarity, this diode allows current to initially take the path labeled *startup path*. When it does so, the voltage applied to the load begins to rise, but the gate stays low, as it is tied to ground. Eventually, the voltage rises high enough that the gate-source voltage switches on the MOSFET, and current begins to flow through the *normal path* instead. This path takes the current through the low-impedance MOSFET channel, rather than through the diode where the forward threshold voltage of the diode would be lost.

If power is applied in the incorrect polarity, the substrate diode never conducts, so the MOSFET never switches on.

### Power switch

After the reverse polarity protection, the current must flow through Q14, which is connected as a traditional switch. R88 holds its gate and source together when the power is switched off, keeping the MOSFET also turned off.

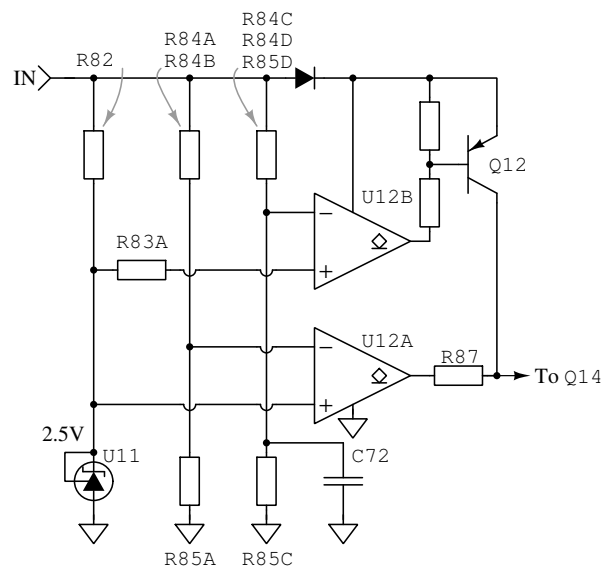


Figure 3: UVLO and OVLO circuit

To simplify things, the subcircuit in figure 3 is powered through a single diode for its own reverse-polarity protection. Bandgap voltage reference U11 does not need this, as its internal circuit has an antiparallel diode built in [10].

### Undervoltage lockout

U11 provides an accurate 2.5 V level against which the input voltage can be compared. As the input voltage rises, the voltage at the output of the R84A/R84B/R85A voltage divider also rises. When this divided voltage reaches the 2.5V reference level, the input voltage is at 7.5 V, the undervoltage threshold. Comparator U12A switches low, allowing power switch Q14 to switch on and allow the full system to operate.

### Overvoltage protection

If the input voltage continues to rise, the voltage at the output of the R84C/R84D/R85D/R85C voltage divider will eventually reach the reference level when the input voltage is at 10 V. C72 provides a low-pass effect which prevents simple noise and short transients from causing this. When this happens, comparator U12B switches low. This switches Q14 off via Q12, powering down the circuit.

Note that R83A is a remnant of a previous revision of the design, and serves no purpose. It originally was intended to provide a latching mechanism

### Inrush current limiting

Q14 does not act *only* as a power switch. When it switches on, it starts in the ‘cutoff’ region of operation, and moves to the ‘saturation’ region. However, it must pass through the ‘linear’ region. We can take advantage of this.

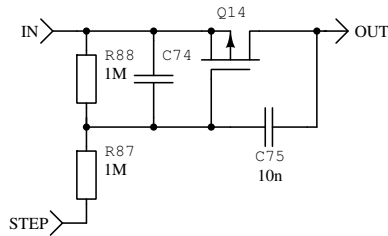


Figure 4: Miller integrator

The circuit in figure 4, when Q14 is in the linear region, is known as a ‘Miller integrator’ [2, pg. 283]. Because R87 and R88 form a voltage divider, the input voltage to the integrator will be half the input supply voltage at half the resistance (nominally, 4.5 V at 500 kΩ). The integrator

capacitance is simply C75, which is 10 nF. Because the voltage across C74 changes only negligibly, its effect on the circuit will also be negligible.

At startup, C75 would tend to hold the gate above the source, switching the transistor fully on and bypassing any limiting effect. The much larger C74 swamps this effect, holding the gate to the source until a DC source of current is provided via R87.

The input signal to this integrator will be a step, because comparator U12A switches directly from ‘off’ to ‘on’. Integrating a step gives a ramp, with a slope of:

$$\frac{dv}{dt} = \frac{v_{in}}{RC} = \frac{4.5 \text{ V}}{(500 \text{ k}\Omega)(10 \text{ nF})} = 900 \text{ V/s} = 0.9 \text{ V/ms}$$

This means it will take about 10 ms for the voltage to ramp from zero to the full input voltage of 9 V.

Because the inrush current to be limited is the current charging the system’s capacitance, we can calculate the worst-case inrush current. Charge is held on-board by approximately 200 μF worth of capacitors. Given this capacitance and the voltage slope, the current is calculated as follows:

$$I = C \frac{dv}{dt} = (200 \text{ }\mu\text{F})(900 \text{ V/s}) = 180 \text{ mA}$$

During this charging time, the power dissipated in Q14 will be high. The worst-case is when the full input voltage is dropped across it, giving a power dissipation of  $(9 \text{ V})(180 \text{ mA}) = 1.62 \text{ W}$ . The average power for the entire time will be:

$$\begin{aligned} P &= IV \\ P_{\text{avg}} &= \frac{1}{10 \text{ ms}} \int_0^{10 \text{ ms}} iv \, dt \\ &= \frac{1}{2} (1.62 \text{ W})(10 \text{ ms}) / (10 \text{ ms}) \\ &= 810 \text{ mW} \end{aligned}$$

Thus, a MOSFET must be selected that can handle an 810 mW pulse for 10 ms. This pulse-handling capability is shown in the datasheet as the “forward-biased safe operating area”, and we selected an AOD417 which can easily handle this pulse with excess [1].



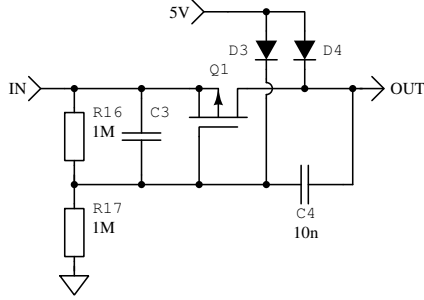


Figure 5: USB power input circuit

### USB Power Input Circuit

Relevant schematic page: [Comm/2](#)

The USB specification is very demanding with respect to the amount of inrush current that a USB device may consume. We used the same Miller-integrator inrush limiting circuit on the USB power supply input.

In this case, the resistance has not changed (still a Thévenin-equivalent 500 kΩ), and the input step is equal to 2.5 V, half the input voltage. The integrating capacitance is C4, which has a value of 10 nF, and the maximum input capacitance being charged is approximately 20 μF.

$$\frac{dv}{dt} = \frac{v_{in}}{RC} = \frac{2.5 \text{ V}}{(500 \text{ k}\Omega)(10 \text{ nF})} = 500 \text{ V/s}$$

$$I = C \frac{dv}{dt} = (20 \text{ }\mu\text{F})(500 \text{ V/s}) = 10 \text{ mA}$$

The power dissipation in this case is very small (no more than 50 mW for only a few milliseconds), so we used a smaller and less expensive MOSFET that was already in use elsewhere for this particular integrator.

No reverse polarity protection was deemed necessary on the USB input.

Diodes D3 and D4 allow the on-board power supply to power the circuitry downstream from the USB port whenever that supply is powered, so that this circuitry can draw larger amounts of current without the trouble of making sure that this current draw is within USB specifications. D3 shuts off Q1, and D4 provides power in Q1's absence.

### Switching DC-DC Converters

Relevant schematic page: [DCDC/12](#)

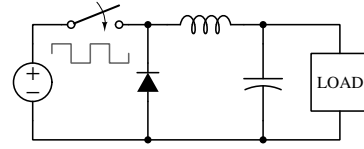


Figure 6: Basic buck converter circuit

### Buck converter theory

The basic idea of an inductor is that it translates electric current flowing through it into a magnetic field around it. There is energy stored in this magnetic field, so the inductor tends to hold the current fixed (as changing the current would require adding or removing energy from the field). The 'buck converter' is a voltage down-converter circuit that takes advantage of this.

A more mathematical approach is that inductors integrate the voltage applied to them, producing a current:

$$i = \frac{1}{L} \int v \, dt$$

A buck converter must have at least one switch, as shown in figure 6. The switch is initially closed for a brief period. This applies a positive voltage to the inductor, causing the current through it to begin to increase (remember that the integral of a step is a ramp). This current flows through to the output of the converter, and the output voltage begins to rise.

Now, the switch is opened. The inductor keeps the current flowing, though, through the diode this time. The voltage across the inductor is now negative (the voltage on the left side had to fall negative in order to forward-bias the diode and make it conduct), so the current starts ramping downward, and the output voltage begins to fall. [5, pp. 356–357]

By repeating this cycle, the output voltage can be made to rise and fall around a desired point, and by placing a large capacitor at the output, the rising and falling current can translate to very small variation in output voltage, though it must rise and fall at least a small amount. This allows the output voltage to be any arbitrary voltage smaller than the input voltage, but does not theoretically lose power, unlike a linear regulator (whose entire mechanism of operation is intentional power loss).

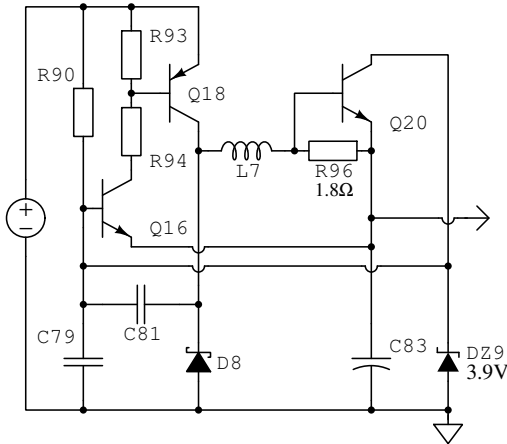


Figure 7: 3.3 V buck converter circuit

### 3.3 V buck converter

In this instrument, we have used a simple, three-transistor regulated buck converter circuit. It is inexpensive, reliable, and though it is not hugely efficient, it generates relatively little switching noise (due, in part, to its low speed compared to more modern designs).

In the first phase of the switching cycle, Q16's base voltage is low. R90 charges C79, and eventually the base voltage rises high enough that Q16 switches on. It pulls Q18's base voltage down, switching on that transistor too. Q18 is equivalent to the main switch in figure 6, and the inductor current starts to rise.

In the next phase of the switching cycle, something draws current towards ground out of C79 and away from Q16's base. This starts a chain reaction: Q16 and Q18 start to switch off, and are no longer driving the inductor. The inductor's tendency to keep current flowing makes the voltage on its left side sharply decrease. This decrease is coupled through C81, which drags Q16's base voltage even lower, switching it off quite solidly. The converter will remain switched off until C79 charges back up through its resistor.

Two things can be the 'something' of the previous paragraph, initiating the switch from phase 1 to phase 2. First, note that Q16's emitter is connected to the output voltage, so when it is switched on, its base will be about 0.65 V above that. When the output voltage reaches about 3.25 V, the base voltage is at about 3.9 V, and Zener diode DZ9 starts to conduct. This means that the output voltage will not be allowed to rise above about 3.3 V, providing the voltage regulation function.

The inductor current must also flow through sense resistor R96. If the current exceeds about 360 mA, the base-emitter voltage applied to Q20 will be high enough

to switch it on, and Q20 will draw the shutdown current. This provides the current-limiting function.

### -9V inverting regulator

It is possible to repurpose a buck converter circuit as an inverting (buck-boost) circuit that generates a negative voltage [11]. The circuit is otherwise the same, with two exceptions. First, the Zener diode, now DZ10, is a 10 V part, giving a regulated output voltage of about 9.35 V. Second, because the current through the output capacitor has more hard edges in a buck-boost converter, a 1  $\mu$ F ceramic capacitor (useful to higher frequencies and currents) has been added in parallel with the main output capacitor.

## Linear Regulators

A series-type linear regulator works by acting as a controlled resistance, regulating itself to exactly the resistance required to give the correct output voltage considering the amount of current flowing through it. This means that power loss is a required property of linear regulators. For example, a linear regulator taking an input voltage of 9 V, giving an output voltage of 5 V, and passing a current of 100 mA, will lose  $(9 - 5)(0.1) \text{ W} = 400 \text{ mW}$  of power, dissipated as heat. The loss is sometimes a fair trade for simplicity and low output noise. This instrument uses four linear regulators, which provide power supplies of 5 V, -5 V, 1.8 V, and a low-power 3.3 V supply (a high-power 3.3 V supply for the synthesizer comes from the buck converter).

These regulators are U13, U14, U15, and U16. They are monolithic devices with no external circuitry except for filter capacitors, and as such will not be addressed further. See their datasheets for more information: [9] [8] [4] [7].

## Synthesizer

Relevant schematic page: [Synth/3](#)

In order to generate the test signals, a pair of sinusoids at anywhere from 1 kHz to above 150 MHz, the instrument uses a sophisticated high-speed Direct Digital Synthesis (DDS) integrated circuit.

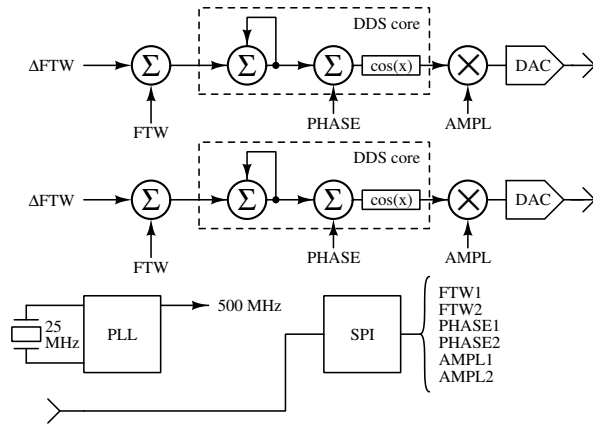


Figure 8: DDS architecture

Figure 8 shows the internal architecture of the chip, somewhat simplified from the version in the datasheet [3]. In each of the two independent waveform generators, a ‘frequency tuning word’ (a 32-bit unsigned integer) is repeatedly added to an accumulator at a rate of 500 MHz. This causes the accumulator to increment, and overflow, at a higher rate for higher tuning words. This sum is added to a phase offset, which allows each signal to be independently offset from the other. This constantly incrementing and resetting count is applied to a lookup table loaded with cosine values, converting it from a digital ramp to a digital sinusoid. It is next multiplied by an amplitude control value, and loaded into a digital-to-analog converter (DAC) to generate the analog, sinusoidal waveform.

This integrated circuit is intended for radio applications. As such, it has advanced features that this instrument does not require. It can be supplied externally with a stable 500 MHz clock signal from a high quality clock generator, but because we do not require such extreme stability, we are instead using its internal Phase-Locked Loop (PLL) to multiply the clock signal from a 25 MHz quartz crystal, X1, up to the full internal clock frequency. Also, the device can generate modulated waveforms using a 4-bit digital modulation input; these inputs are not used.

### Synthesizer Output Amplifiers

Relevant schematic page: [Synth/3](#)

As is often the case with high-speed integrated circuits, the DDS chip has a peculiar output system.

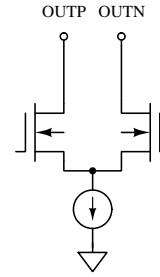


Figure 9: DDS output circuit

The outputs are symmetric current sinks, which pull up to 9.9 mA down from AVDD (1.8 V), and the voltage that appears at these outputs must not deviate by more than 500 mV from AVDD (or else the signal will distort severely). The intended application is for these to be connected to a center-tapped transformer, with the center tap connected to AVDD. This is impractical due to the frequency range required: any transformer with a high enough inductance to operate at 1 kHz has too much parasitic capacitance to operate at 150 MHz. Instead, a DC-coupled differential amplifier was used, with carefully designed termination networks to provide the correct voltage range.

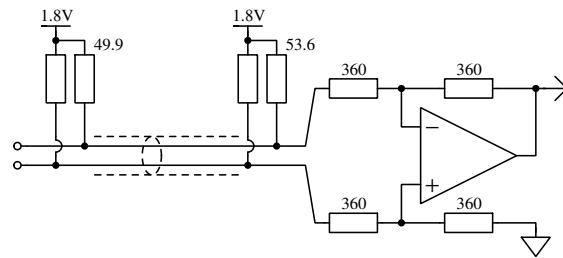


Figure 10: Output amplifier for synthesizer

The 49.9 Ω resistors terminate the transmission line at the source. The amplifier’s inputs are relatively low impedance, so 53.6 Ω resistors were used as load termination to provide a more accurate impedance when placed in parallel with the differential amplifier.

Note that the input impedances of the two sides of the differential amplifier are not equal. On the side entering the noninverting (‘positive’) input, the impedance to ground is the sum of the two input resistors, or 720 Ω. However, on the other side, the end of the feedback chain is not grounded, it is a 180° phase-shifted copy of the input signal. The equivalent input impedance here is only 360 Ω, and a more proper termination resistor there would be 57.6 Ω. However, these transmission lines are very short, and the difference in impedance does not make a significant difference. Using two different resistors here would

have increased the design complexity and cost, and was deemed unnecessary.

## Output System

Relevant schematic page: [OutputAmp/4](#)

## Attenuator and Filter

## Gain Stages and Termination

## Input System

Relevant schematic page: [InputFrontend/6](#)

The input system is used to transform the signals received from the device under test into signals that can be read directly by the microcontroller. First, the signals pass through a protection network; this is to protect the following (expensive!) circuitry from damage by signals that are too large. The signals then pass into a switch, allowing one of the two to be selected. The selected signal is buffered, summed with a phase reference signal, filtered to remove high-frequency interference, and then enters a logarithmic detector stage. The output of this, after a bit more filtering, is applied to the microcontroller's analog-to-digital converter.

## Protection

Relevant schematic page: [Protection/7](#)

## Switching

Relevant schematic page: [Switching/8](#)

It would not be practical for the analyzer to contain two independent input subsystems to measure both inputs, as these systems are complex and expensive, and there would be significant variation between the two. Instead, one input subsystem is switched between two inputs. This switching is accomplished with a pair of high-bandwidth SPST RF analog switches.

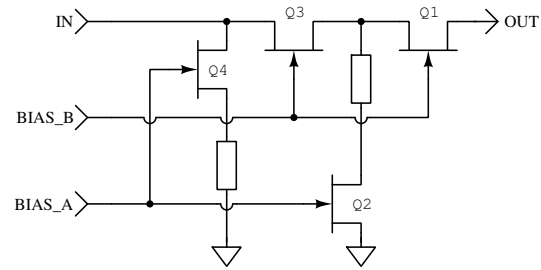


Figure 11: GaAs switch circuit

Figure 11 shows the internal circuit of the switch [6]. It is a simple circuit built from four gallium arsenide (GaAs) FETs<sup>1</sup>. These are depletion-mode devices, so they are switched *on* by applying zero volts to the gate, and turned *off* by applying a negative voltage, around  $-5$  V. Switching on transistors Q1 and Q3 allows the signal to pass through from the input to the output. Switching on transistors Q2 and Q4 disconnects the input from the output, but also *terminates* the input (applies a  $50\ \Omega$  resistance between the input and ground). This is important to make sure that a disconnected input does not cause signal reflections.

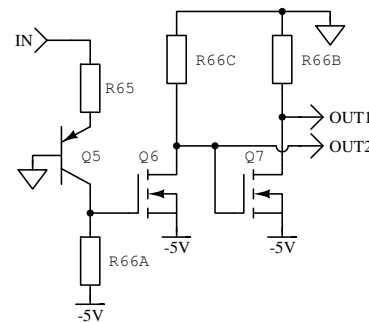


Figure 12: GaAs control circuit

Figure 12 is the control circuit for figure 11. When  $0$  V (a logic *low*) is applied to the input from the microcontroller, no current flows through R65 or R66A. This applies  $-5$  V to Q6. Because Q6's source is connected to the  $-5$  V rail instead of ground, the voltage between gate and source ( $V_{GS}$ ) is zero, and Q6 is switched off. This provides  $0$  V to one input of the GaAs switches. Q7 acts as an inverter, providing  $-5$  V to the other GaAs switch input. The dual switches have their inputs connected opposite each other, so this switches one of them *on* and the other *off*.

When  $3.3$  V (a logic *high*) is applied to the input from the microcontroller, about  $1.6$  mA flows through R65. This

<sup>1</sup>The type of FET used is a relatively uncommon variant called a *MESFET*, or *MEtal-Semiconductor Field Effect Transistor*. This is a variant on the well known *JFET*, using a Schottky junction instead of a PN junction. While uncommon in general, it is used often in GaAs circuits due to the relative ease of constructing GaAs MESFETs.

saturates Q5, applying about 0.7 V to Q6. As above,  $V_{GS}$  is the difference between this and the  $-5$  V rail, or 5.7 V. Q6 now switches on, and the two signals to the GaAs switches swap places. This swaps the two switches, turning on the one that was off, and turning off the one that was on.

### Buffer and Filter

Relevant schematic page: [Buffer\\_Filter/9](#)

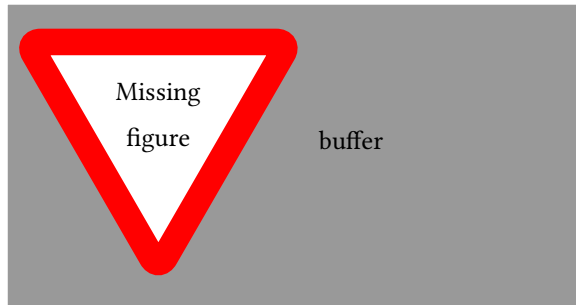


Figure 13: Input buffer circuit

Figure 13 is the input signal buffer. Q9 is a simple emitter-follower (common collector) amplifier, providing isolation between the input and further circuitry. Q10 and Q8 form a current source to power it, in a feedback configuration providing approximately  $0.65 \text{ V}/30 \Omega \approx 22 \text{ mA}$ .

The configuration of R76 and R77 sums together the input signal and the phase reference signal, and this continues to the input filter. R75 combines with R76 to properly terminate the  $50 \Omega$  phase reference signal.

To lower the effect of external interference on the signals, a filter restricts signals above the instrument's maximum operating frequency from continuing past this point.

### Logarithmic Detector

Relevant schematic page: [Detector/10](#)

Signals at this point can have a very wide variety of amplitudes, as high as  $+10 \text{ dBm}$  (1 V peak) and as low as  $-60 \text{ dBm}$  ( $224 \mu\text{V}$  peak) or even lower, and over a wide frequency range. Measuring this requires a *logarithmic detector*. This is a circuit that responds to the logarithm of the signal, rather than the signal itself, generating a voltage proportional to the *decibel* amplitude of the signal. More exactly, the output voltage of the detector is equal to:

$$V_{\text{out}} = (24 \text{ mV/dB})((20 \text{ dB}) \log_{10}(V_{\text{in}}) + 108 \text{ dB})$$

### Microcontroller

Relevant schematic page: [MPU/13](#)

### USB Communications

Relevant schematic page: [Comm/2](#)

## 4.3 Software Description

### Signal Processing

#### Sampling

#### Null Search

#### Calibration

#### User Interface

## 5 Electrical parts

| Reference | Manufacturer | Part Number | Line  | Description |
|-----------|--------------|-------------|---|-------------|
| C1        |              |             | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |             |
| C2        |              |             | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |             |
| C3        |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C4        |              |             | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |             |
| C5        |              |             | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |             |
| C8        |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C9        |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C10       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C11       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C12       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C13       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C14       |              |             | CAP MLCC 15p 50V 10% C0G [0603]             |             |
| C15       |              |             | CAP MLCC 15p 50V 10% C0G [0603]             |             |
| C16       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C17       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C18       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C19       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C20       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C21       |              |             | CAP MLCC 100n 20V 10% $\geq$ X7R [0805]     |             |
| C22       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C23       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C24       |              |             | CAP MLCC 100n 20V 10% $\geq$ X7R [0805]     |             |
| C25       |              |             | CAP MLCC 680p 16V 5% C0G [0603]             |             |
| C26       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C27       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C28       |              |             | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |             |
| C29       |              |             | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |             |
| C30       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C31       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C32       |              |             | CAP MLCC 1n 50V 10% C0G [0603]              |             |
| C33       |              |             | CAP MLCC 1n 50V 10% C0G [0603]              |             |
| C34       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |
| C35       |              |             | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |             |

| Reference | Manufacturer | Part Number         | Line  | Description               |
|-----------|--------------|---------------------|---|---------------------------|
| C36       |              |                     | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |                           |
| C37       |              |                     | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |                           |
| C38       |              |                     | CAP MLCC 100n 20V 10% $\geq$ X7R [0805]     |                           |
| C39       |              |                     | CAP MLCC 100n 20V 10% $\geq$ X7R [0805]     |                           |
| C40       |              |                     | CAP MLCC 10 $\mu$ 25V 10% $\geq$ X5R [1206] |                           |
| C41       |              |                     | CAP MLCC 10 $\mu$ 25V 10% $\geq$ X5R [1206] |                           |
| C43       | Murata       | GRM1555C1H220GA01D  | DIST DIGIKEY 490-6219-1-ND                  | CAP MLCC 22pF C0G [0402]  |
| C44       | Murata       | GRM1555C1H220GA01D  | DIST DIGIKEY 490-6219-1-ND                  | CAP MLCC 22pF C0G [0402]  |
| C45       | Samsung      | CL10C1R5BB8NNNC     | DIST DIGIKEY 1276-1656-1-ND                 | CAP MLCC 1.5pF C0G [0402] |
| C46       | Samsung      | CL05C560JB5NNNC     | DIST DIGIKEY 1276-1707-1-ND                 | CAP MLCC 56pF C0G [0402]  |
| C47       | Samsung      | CL05C4R7CB5NNNC     | DIST DIGIKEY 1276-1703-1-ND                 | CAP MLCC 4.7pF C0G [0402] |
| C48       | Samsung      | CL05C4R7CB5NNNC     | DIST DIGIKEY 1276-1703-1-ND                 | CAP MLCC 4.7pF C0G [0402] |
| C49       | Samsung      | CL05C560JB5NNNC     | DIST DIGIKEY 1276-1707-1-ND                 | CAP MLCC 56pF C0G [0402]  |
| C50       | Samsung      | CL05C4R7CB5NNNC     | DIST DIGIKEY 1276-1703-1-ND                 | CAP MLCC 4.7pF C0G [0402] |
| C51       | Murata       | GRM1555C1H220GA01D  | DIST DIGIKEY 490-6219-1-ND                  | CAP MLCC 22pF C0G [0402]  |
| C52       | Murata       | GRM1555C1H220GA01D  | DIST DIGIKEY 490-6219-1-ND                  | CAP MLCC 22pF C0G [0402]  |
| C53       |              |                     | CAP MLCC 47 $\mu$ 10V 20% $\geq$ X5R [1206] |                           |
| C54       |              |                     | CAP MLCC 1n 50V 10% C0G [0603]              |                           |
| C55       |              |                     | CAP MLCC 100n 20V 10% $\geq$ X7R [0805]     |                           |
| C56       |              |                     | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |                           |
| C57       |              |                     | CAP MLCC 1n 50V 10% C0G [0603]              |                           |
| C58       |              |                     | CAP MLCC 1n 50V 10% C0G [0603]              |                           |
| C59       |              |                     | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                           |
| C60       | TDK          | C1608C0G1H220F080AA | DIST DIGIKEY 445-5366-1-ND                  | CAP MLCC 22pF C0G [0402]  |
| C61       | TDK          | C1608C0G1H330F080AA | DIST DIGIKEY 445-7027-1-ND                  | CAP MLCC 33pF C0G [0402]  |
| C62       | TDK          | C1608C0G1H220F080AA | DIST DIGIKEY 445-5366-1-ND                  | CAP MLCC 22pF C0G [0402]  |
| C63       |              |                     | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |                           |
| C64       | TDK          | C2012JB1H105K085AB  | DIST DIGIKEY 445-11490-1-ND                 | CAP MLCC 1uF [0805]       |
| C65       |              |                     | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |                           |
| C66       | TDK          | C2012JB1H105K085AB  | DIST DIGIKEY 445-11490-1-ND                 | CAP MLCC 1uF [0805]       |
| C67       |              |                     | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |                           |
| C68       |              |                     | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                           |
| C69       |              |                     | CAP MLCC 47 $\mu$ 10V 20% $\geq$ X5R [1206] |                           |
| C70       |              |                     | CAP MLCC 220p 16V 5% C0G [0603]             |                           |
| C71       |              |                     | CAP MLCC 330n 50V 10% $\geq$ X7R [0603]     |                           |
| C72       |              |                     | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |                           |
| C73       |              |                     | CAP MLCC 100n 20V 10% $\geq$ X7R [0805]     |                           |

| Reference | Manufacturer | Part Number            | Line  | Description            |
|-----------|--------------|------------------------|---|------------------------|
| C74       |              |                        | CAP MLCC 100n 20V 10% $\geq$ X7R [0805]     |                        |
| C75       |              |                        | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |                        |
| C76       | Panasonic    | 16SVPC100M             | DIST DIGIKEY P16468CT-ND                    | CAP ALU-POLY 100uF 16V |
| C77       | Panasonic    | 16SVPC100M             | DIST DIGIKEY P16468CT-ND                    | CAP ALU-POLY 100uF 16V |
| C78       |              |                        | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |                        |
| C79       |              |                        | CAP MLCC 10n 50V 10% $\geq$ X5R [0603]      |                        |
| C80       |              |                        | CAP MLCC 1n 50V 10% C0G [0603]              |                        |
| C81       |              |                        | CAP MLCC 1n 50V 10% C0G [0603]              |                        |
| C82       | Panasonic    | 16SVPC100M             | DIST DIGIKEY P16468CT-ND                    | CAP ALU-POLY 100uF 16V |
| C83       | Panasonic    | 16SVPC100M             | DIST DIGIKEY P16468CT-ND                    | CAP ALU-POLY 100uF 16V |
| C84       |              |                        | CAP MLCC 1 $\mu$ 16V 10% $\geq$ X5R [1206]  |                        |
| C85       |              |                        | CAP MLCC 1 $\mu$ 16V 10% $\geq$ X5R [1206]  |                        |
| C86       |              |                        | CAP MLCC 1 $\mu$ 16V 10% $\geq$ X5R [1206]  |                        |
| C87       |              |                        | CAP MLCC 1 $\mu$ 16V 10% $\geq$ X5R [1206]  |                        |
| C88       |              |                        | CAP MLCC 1 $\mu$ 10V 10% $\geq$ X5R [0805]  |                        |
| C89       |              |                        | CAP MLCC 1 $\mu$ 16V 10% $\geq$ X5R [1206]  |                        |
| C90       |              |                        | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |                        |
| C91       |              |                        | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |                        |
| C92       |              |                        | CAP MLCC 22 $\mu$ 6V 10% $\geq$ X5R [0805]  |                        |
| C93       |              |                        | CAP MLCC 1 $\mu$ 10V 10% $\geq$ X5R [0805]  |                        |
| C97       |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C98       |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C100      |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C101      |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C102      |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C103      |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C104      |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C105      |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C106      |              |                        | CAP MLCC 100n 16V 10% $\geq$ X7R [0603]     |                        |
| C107      |              |                        | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |                        |
| C108      |              |                        | CAP MLCC 10 $\mu$ 10V 10% $\geq$ X5R [0805] |                        |
| C109      |              |                        | CAP MLCC 1 $\mu$ 10V 10% $\geq$ X5R [0805]  |                        |
| C110      |              |                        | CAP MLCC 15p 50V 10% C0G [0603]             |                        |
| C111      |              |                        | CAP MLCC 15p 50V 10% C0G [0603]             |                        |
| D3        |              | MMBD4148/MMBD914/BAS16 | DIODE MMBD4148                              |                        |
| D4        |              | MMBD4148/MMBD914/BAS16 | DIODE MMBD4148                              |                        |
| D6        |              | MMBD4148/MMBD914/BAS16 | DIODE MMBD4148                              |                        |



| Reference | Manufacturer | Part Number     | Line                          | Description                       |
|-----------|--------------|-----------------|-------------------------------|-----------------------------------|
| D7        |              |                 | SCHOTTKY MBR0540              |                                   |
| D8        |              |                 | SCHOTTKY MBR0540              |                                   |
| DS1       |              |                 | LED RED [3mm]                 |                                   |
| DS2       |              |                 | LED RED [0603]                |                                   |
| DS3       |              |                 | LED RED [0603]                |                                   |
| DS4       |              |                 | LED RED [0603]                |                                   |
| DS5       |              |                 | LED RED [0603]                |                                   |
| DS6       |              |                 | LED RED [0603]                |                                   |
| DS7       |              |                 | LED RED [0603]                |                                   |
| DS8       |              |                 | LED RED [0603]                |                                   |
| DS9       |              |                 | LED RED [0603]                |                                   |
| DS10      |              |                 | LED RED [0603]                |                                   |
| DS11      |              |                 | LED RED [0603]                |                                   |
| DZ1       |              |                 | ZENER ONSEMI 1SMA5914BT3G     |                                   |
| DZ2       |              |                 | TVS LITTELFUSE SP0503BAHT     |                                   |
| DZ3       |              |                 | TVS ONSEMI ESD9L5.0ST5G       |                                   |
| DZ4       |              |                 | TVS ONSEMI ESD9L5.0ST5G       |                                   |
| DZ5       |              |                 | ZENER BZX84C2V7               |                                   |
| DZ6       |              |                 | ZENER BZX84C2V7               |                                   |
| DZ7       |              |                 | TVS ONSEMI ESD9L5.0ST5G       |                                   |
| DZ8       |              |                 | TVS ONSEMI ESD9L5.0ST5G       |                                   |
| DZ9       |              |                 | ZENER BZX84C3V9               |                                   |
| DZ10      |              |                 | ZENER BZX84C10                |                                   |
| E1        | Laird        | HZ0805B222R-10  | DIST DIGIKEY 240-2562-1-ND    | FERRITE CHIP 2.2k @ 100MHz [0805] |
| E2        | Laird        | HZ0805B222R-10  | DIST DIGIKEY 240-2562-1-ND    | FERRITE CHIP 2.2k @ 100MHz [0805] |
| E5        | Bourns       | MZ1608-102Y     | DIST DIGIKEY MZ1608-102YCT-ND | FERRITE CHIP 1k @ 100MHz [0603]   |
| J1        | CUI          | PJ-037A         | DIST DIGIKEY CP-037A-ND       | CONN BARREL 2x6.5MM               |
| J2        | TE           | 5-1814400-1     | DIST DIGIKEY A97593-ND        | CONN SMA RIGHTANGLE FEMALE        |
| J3        | TE           | 5-1814400-1     | DIST DIGIKEY A97593-ND        | CONN SMA RIGHTANGLE FEMALE        |
| J4        | TE           | 5-1814400-1     | DIST DIGIKEY A97593-ND        | CONN SMA RIGHTANGLE FEMALE        |
| J6        | FCI          | 10118194-0001LF | DIST DIGIKEY 609-4618-1-ND    | CONN USB MICRO-B FEMALE           |
| J8        | ONSHORE      | 302-S201        | DIST DIGIKEY ED10524-ND       | HEADER 2x10 100MIL SHROUDED       |
| L1        | Samsung      | CIH05T56NJNC    | DIST DIGIKEY 1276-6281-1-ND   | IND CHIP 56nH                     |
| L2        | Samsung      | CIH05T47NJNC    | DIST DIGIKEY 1276-6280-1-ND   | IND CHIP 47nH                     |
| L3        | Samsung      | CIH05T47NJNC    | DIST DIGIKEY 1276-6280-1-ND   | IND CHIP 47nH                     |
| L4        | Panasonic    | ELJ-RF39NGFB    | DIST DIGIKEY PCD1917CT-ND     | IND CHIP 39nH                     |
| L5        | Panasonic    | ELJ-RF39NGFB    | DIST DIGIKEY PCD1917CT-ND     | IND CHIP 39nH                     |

| Reference | Manufacturer | Part Number      | Line                          | Description                 |
|-----------|--------------|------------------|-------------------------------|-----------------------------|
| L6        | Bourns       | RLB0914-221KL    | DIST DIGIKEY RLB0914-221KL-ND | IND WOUND 220uH 700mA       |
| L7        | Bourns       | RLB0914-221KL    | DIST DIGIKEY RLB0914-221KL-ND | IND WOUND 220uH 700mA       |
| L8        | TDK          | MLZ2012M4R7HT000 | DIST DIGIKEY 445-8659-1-ND    | IND CHIP 4.7uH 300mA [0805] |
| L9        | TDK          | MLZ2012M4R7HT000 | DIST DIGIKEY 445-8659-1-ND    | IND CHIP 4.7uH 300mA [0805] |
| L10       | TDK          | MLZ2012M4R7HT000 | DIST DIGIKEY 445-8659-1-ND    | IND CHIP 4.7uH 300mA [0805] |
| MP5       | Laird        | BMI-S-203-C      | DIST DIGIKEY 903-1015-ND      | RF SHIELD TWO-PIECE         |
| MP5       | Laird        | BMI-S-203F       | DIST DIGIKEY 903-1052-1-ND    | RF SHIELD TWO-PIECE         |
| Q1        |              |                  | PMOS IRF IRLML6402            |                             |
| Q2        |              | MMBT3906/BC857   | PNP MMBT3906                  |                             |
| Q3        |              | 2N7002/MMBF170   | NMOS 2N7002                   |                             |
| Q4        |              | 2N7002/MMBF170   | NMOS 2N7002                   |                             |
| Q5        |              | MMBT3906/BC857   | PNP MMBT3906                  |                             |
| Q6        |              | 2N7002/MMBF170   | NMOS 2N7002                   |                             |
| Q7        |              | 2N7002/MMBF170   | NMOS 2N7002                   |                             |
| Q8        |              | MMBT3904/BC847   | NPN MMBT3904                  |                             |
| Q9        |              |                  | NPN NXP BFR540                |                             |
| Q10       |              |                  | NPN NXP BFR540                |                             |
| Q11       |              | MMBT3904/BC847   | NPN MMBT3904                  |                             |
| Q12       |              | MMBT3906/BC857   | PNP MMBT3906                  |                             |
| Q13       |              |                  | PMOS IRF IRLML6402            |                             |
| Q14       |              |                  | PMOS AOS AOD417               |                             |
| Q15       |              | MMBT3904/BC847   | NPN MMBT3904                  |                             |
| Q16       |              | MMBT3904/BC847   | NPN MMBT3904                  |                             |
| Q17       |              |                  | PNP PZT2907A                  |                             |
| Q18       |              |                  | PNP PZT2907A                  |                             |
| Q19       |              | MMBT3904/BC847   | NPN MMBT3904                  |                             |
| Q20       |              | MMBT3904/BC847   | NPN MMBT3904                  |                             |
| R1        |              |                  | RES SMD 3k3 5% [0603]         |                             |
| R2        |              |                  | RES SMD 1k6 1% [0603]         |                             |
| R3        |              |                  | RES SMD 1k6 1% [0603]         |                             |
| R4        |              |                  | RES SMD 3k3 5% [0603]         |                             |
| R5        |              |                  | RES SMD 1k6 1% [0603]         |                             |
| R6        |              |                  | RES SMD 1k6 1% [0603]         |                             |
| R7        |              |                  | RES SMD 1k6 1% [0603]         |                             |
| R8        |              |                  | RES SMD 3k3 5% [0603]         |                             |
| R9        |              |                  | RES SMD 3k3 5% [0603]         |                             |
| R10       | Bel Fuse     | 0ZCJ0005FF2E     | DIST DIGIKEY 507-1793-1-ND    | PPTC 50mA/150mA 60V [1206]  |

| Reference | Manufacturer | Part Number     | Line                         | Description                 |
|-----------|--------------|-----------------|------------------------------|-----------------------------|
| R11       | Bel Fuse     | 0ZCJ0005FF2E    | DIST DIGIKEY 507-1793-1-ND   | PPTC 50mA/150mA 60V [1206]  |
| R12       | Bel Fuse     | 0ZCJ0005FF2E    | DIST DIGIKEY 507-1793-1-ND   | PPTC 50mA/150mA 60V [1206]  |
| R13       |              |                 | RES SMD 1M 5% [0603]         |                             |
| R14       |              |                 | RES SMD 30 1% [0603]         |                             |
| R15       |              |                 | RES SMD 30 1% [0603]         |                             |
| R16       |              |                 | RES SMD 1M 5% [0603]         |                             |
| R17       |              |                 | RES SMD 1M 5% [0603]         |                             |
| R18       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R19       |              |                 | RES SMD 1k91 1% [0603]       |                             |
| R21       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R22       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R23       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R24       |              |                 | RES SMD 53R6 1% [0603]       |                             |
| R25       |              |                 | RES SMD 53R6 1% [0603]       |                             |
| R26       |              |                 | RES SMD 53R6 1% [0603]       |                             |
| R27       |              |                 | RES SMD 53R6 1% [0603]       |                             |
| R28       |              |                 | RES SMD 360 1% [0603]        |                             |
| R29       |              |                 | RES SMD 360 1% [0603]        |                             |
| R30       |              |                 | RES SMD 360 1% [0603]        |                             |
| R31       |              |                 | RES SMD 360 1% [0603]        |                             |
| R32       |              |                 | RES SMD 360 1% [0603]        |                             |
| R33       |              |                 | RES SMD 360 1% [0603]        |                             |
| R34       |              |                 | RES SMD 360 1% [0603]        |                             |
| R35       |              |                 | RES SMD 360 1% [0603]        |                             |
| R36       |              |                 | RES SMD 1k91 1% [0603]       |                             |
| R37       |              |                 | RES SMD 1k91 1% [0603]       |                             |
| R38       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R39       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R40       |              |                 | RES SMD 1k6 1% [0603]        |                             |
| R41       | Yageo        | YC164-JR-0710KL | DIST DIGIKEY YC164J-10KCT-ND | RESPACK SMD 10k 5% [4x0603] |
| R42       |              |                 | RES SMD 200 1% [0603]        |                             |
| R43       |              |                 | RES SMD 200 1% [0603]        |                             |
| R45       |              |                 | RES SMD 30 1% [0603]         |                             |
| R46       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R47       |              |                 | RES SMD 150 1% [0603]        |                             |
| R48       |              |                 | RES SMD 750 1% [0603]        |                             |
| R49       |              |                 | RES SMD 150 1% [0603]        |                             |


| Reference | Manufacturer | Part Number     | Line                         | Description                 |
|-----------|--------------|-----------------|------------------------------|-----------------------------|
| R50       |              |                 | RES SMD 33 1% [0603]         |                             |
| R51       |              |                 | RES SMD 33 1% [0603]         |                             |
| R52       |              |                 | RES SMD 33 1% [0603]         |                             |
| R53       |              |                 | RES SMD 33 1% [0603]         |                             |
| R54       |              |                 | RES SMD 33 1% [0603]         |                             |
| R55       |              |                 | RES SMD 33 1% [0603]         |                             |
| R56       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R57       |              |                 | RES SMD 1k6 1% [0603]        |                             |
| R58       |              |                 | RES SMD 1k6 1% [0603]        |                             |
| R59       |              |                 | RES SMD 3R3 10% [0603]       |                             |
| R60       |              |                 | RES SMD 750 1% [0603]        |                             |
| R61       |              |                 | RES SMD 750 1% [0603]        |                             |
| R62       |              |                 | RES SMD 1k6 1% [0603]        |                             |
| R63       |              |                 | RES SMD 1k6 1% [0603]        |                             |
| R64       |              |                 | RES SMD 3R3 10% [0603]       |                             |
| R65       |              |                 | RES SMD 1k6 1% [0603]        |                             |
| R66       | Yageo        | YC164-JR-0710KL | DIST DIGIKEY YC164J-10KCT-ND | RESPACK SMD 10k 5% [4x0603] |
| R67       |              |                 | RES SMD 200 1% [0603]        |                             |
| R68       |              |                 | RES SMD 200 1% [0603]        |                             |
| R69       |              |                 | RES SMD 200 1% [0603]        |                             |
| R70       |              |                 | RES SMD 200 1% [0603]        |                             |
| R71       |              |                 | RES SMD 200 1% [0603]        |                             |
| R72       |              |                 | RES SMD 200 1% [0603]        |                             |
| R73       |              |                 | RES SMD 1k6 1% [0603]        |                             |
| R74       |              |                 | RES SMD 30 1% [0603]         |                             |
| R75       |              |                 | RES SMD 100 1% [0603]        |                             |
| R76       |              |                 | RES SMD 100 1% [0603]        |                             |
| R77       |              |                 | RES SMD 100 1% [0603]        |                             |
| R78       |              |                 | RES SMD 3k3 5% [0603]        |                             |
| R79       |              |                 | RES SMD 53R6 1% [0603]       |                             |
| R80       |              |                 | RES SMD 49R9 1% [0603]       |                             |
| R81       | BelFuse      | 0ZCJ0035AF2E    | DIST DIGIKEY 507-1801-1-ND   | PPTC 350mA/750mA 30V [1206] |
| R82       |              |                 | RES SMD 3k3 5% [0603]        |                             |
| R83       | Yageo        | YC164-JR-0710KL | DIST DIGIKEY YC164J-10KCT-ND | RESPACK SMD 10k 5% [4x0603] |
| R84       | Yageo        | YC164-JR-0710KL | DIST DIGIKEY YC164J-10KCT-ND | RESPACK SMD 10k 5% [4x0603] |
| R85       | Yageo        | YC164-JR-0710KL | DIST DIGIKEY YC164J-10KCT-ND | RESPACK SMD 10k 5% [4x0603] |
| R86       |              |                 | RES SMD 3k3 5% [0603]        |                             |

| Reference | Manufacturer | Part Number  | Line                       | Description                 |
|-----------|--------------|--------------|----------------------------|-----------------------------|
| R87       |              |              | RES SMD 1M 5% [0603]       |                             |
| R88       |              |              | RES SMD 1M 5% [0603]       |                             |
| R89       |              |              | RES SMD 3k3 5% [0603]      |                             |
| R90       |              |              | RES SMD 3k3 5% [0603]      |                             |
| R91       |              |              | RES SMD 1k6 1% [0603]      |                             |
| R92       |              |              | RES SMD 750 1% [0603]      |                             |
| R93       |              |              | RES SMD 1k6 1% [0603]      |                             |
| R94       |              |              | RES SMD 750 1% [0603]      |                             |
| R95       |              |              | RES SMD 1R8 5% [1210]      |                             |
| R96       |              |              | RES SMD 1R8 5% [1210]      |                             |
| R97       | BelFuse      | 0ZCJ0010FF2E | DIST DIGIKEY 507-1794-1-ND | PPTC 100mA/250mA 60V [1206] |
| R98       |              |              | RES SMD 3R3 10% [0603]     |                             |
| R99       |              |              | RES SMD 3R3 10% [0603]     |                             |
| R102      |              |              | RES SMD 3k3 5% [0603]      |                             |
| R103      |              |              | RES SMD 3k3 5% [0603]      |                             |
| R104      |              |              | RES SMD 3k3 5% [0603]      |                             |
| R105      |              |              | RES SMD 3k3 5% [0603]      |                             |
| R106      |              |              | RES SMD 1k 5% [0603]       |                             |
| R107      |              |              | RES SMD 1k 5% [0603]       |                             |
| R108      |              |              | RES SMD 1k 5% [0603]       |                             |
| R109      |              |              | RES SMD 1k 5% [0603]       |                             |
| R110      |              |              | RES SMD 200 1% [0603]      |                             |
| R111      |              |              | RES SMD 3k3 5% [0603]      |                             |
| R112      |              |              | RES SMD 200 1% [0603]      |                             |
| R113      |              |              | RES SMD 200 1% [0603]      |                             |
| R114      |              |              | RES SMD 200 1% [0603]      |                             |
| R115      |              |              | RES SMD 200 1% [0603]      |                             |
| R116      |              |              | RES SMD 200 1% [0603]      |                             |
| R117      |              |              | RES SMD 360 1% [0603]      |                             |
| U2        |              |              | IC TI LMH6714MF            |                             |
| U3        |              |              | IC ADI AD9958BCPZ          |                             |
| U4        |              |              | IC TI LMH6714MF            |                             |
| U5        |              |              | IC ADI AD8000YRDZ          |                             |
| U6        |              |              | IC TI THS3001IDGN          |                             |
| U7        |              |              | IC MACOM MAADSS0008        |                             |
| U8        |              |              | IC MACOM MASWSS0162        |                             |
| U9        |              |              | IC MACOM MASWSS0162        |                             |


| Reference | Manufacturer | Part Number         | Line                           | Description              |
|-----------|--------------|---------------------|--------------------------------|--------------------------|
| U10       |              |                     | IC ADI AD8310ARMZ              |                          |
| U11       |              |                     | IC TI TL431AIDBZ               |                          |
| U12       |              |                     | IC GENERIC LM393M              |                          |
| U13       |              |                     | IC ST L78M05CDT                |                          |
| U14       |              |                     | IC ONSEMI MC79M05CDTG          |                          |
| U15       |              |                     | IC DIODES AZ1117CH-1.8TRG1     |                          |
| U16       |              |                     | IC MICROCHIP MCP1700T-3302E/TT |                          |
| U18       |              |                     | IC ATMEL ATSAM4S16CA-AU        |                          |
| X1        | TXC          | 9C-25.000MEEJ-T     | DIST DIGIKEY 887-1283-1-ND     | CRYSTAL 25MHz 18pF 10PPM |
| X2        | Abrakon      | ABLS-12.000MHZ-B4-T | DIST DIGIKEY 535-10218-1-ND    | CRYSTAL 12MHz 18pF       |

## 6 Full schematics

The following pages contain schematics exported directly from the CAD software. While they are documented, it is intended that readers will first familiarize themselves with the workings of the circuits by reading through the [Theory of Operation](#).

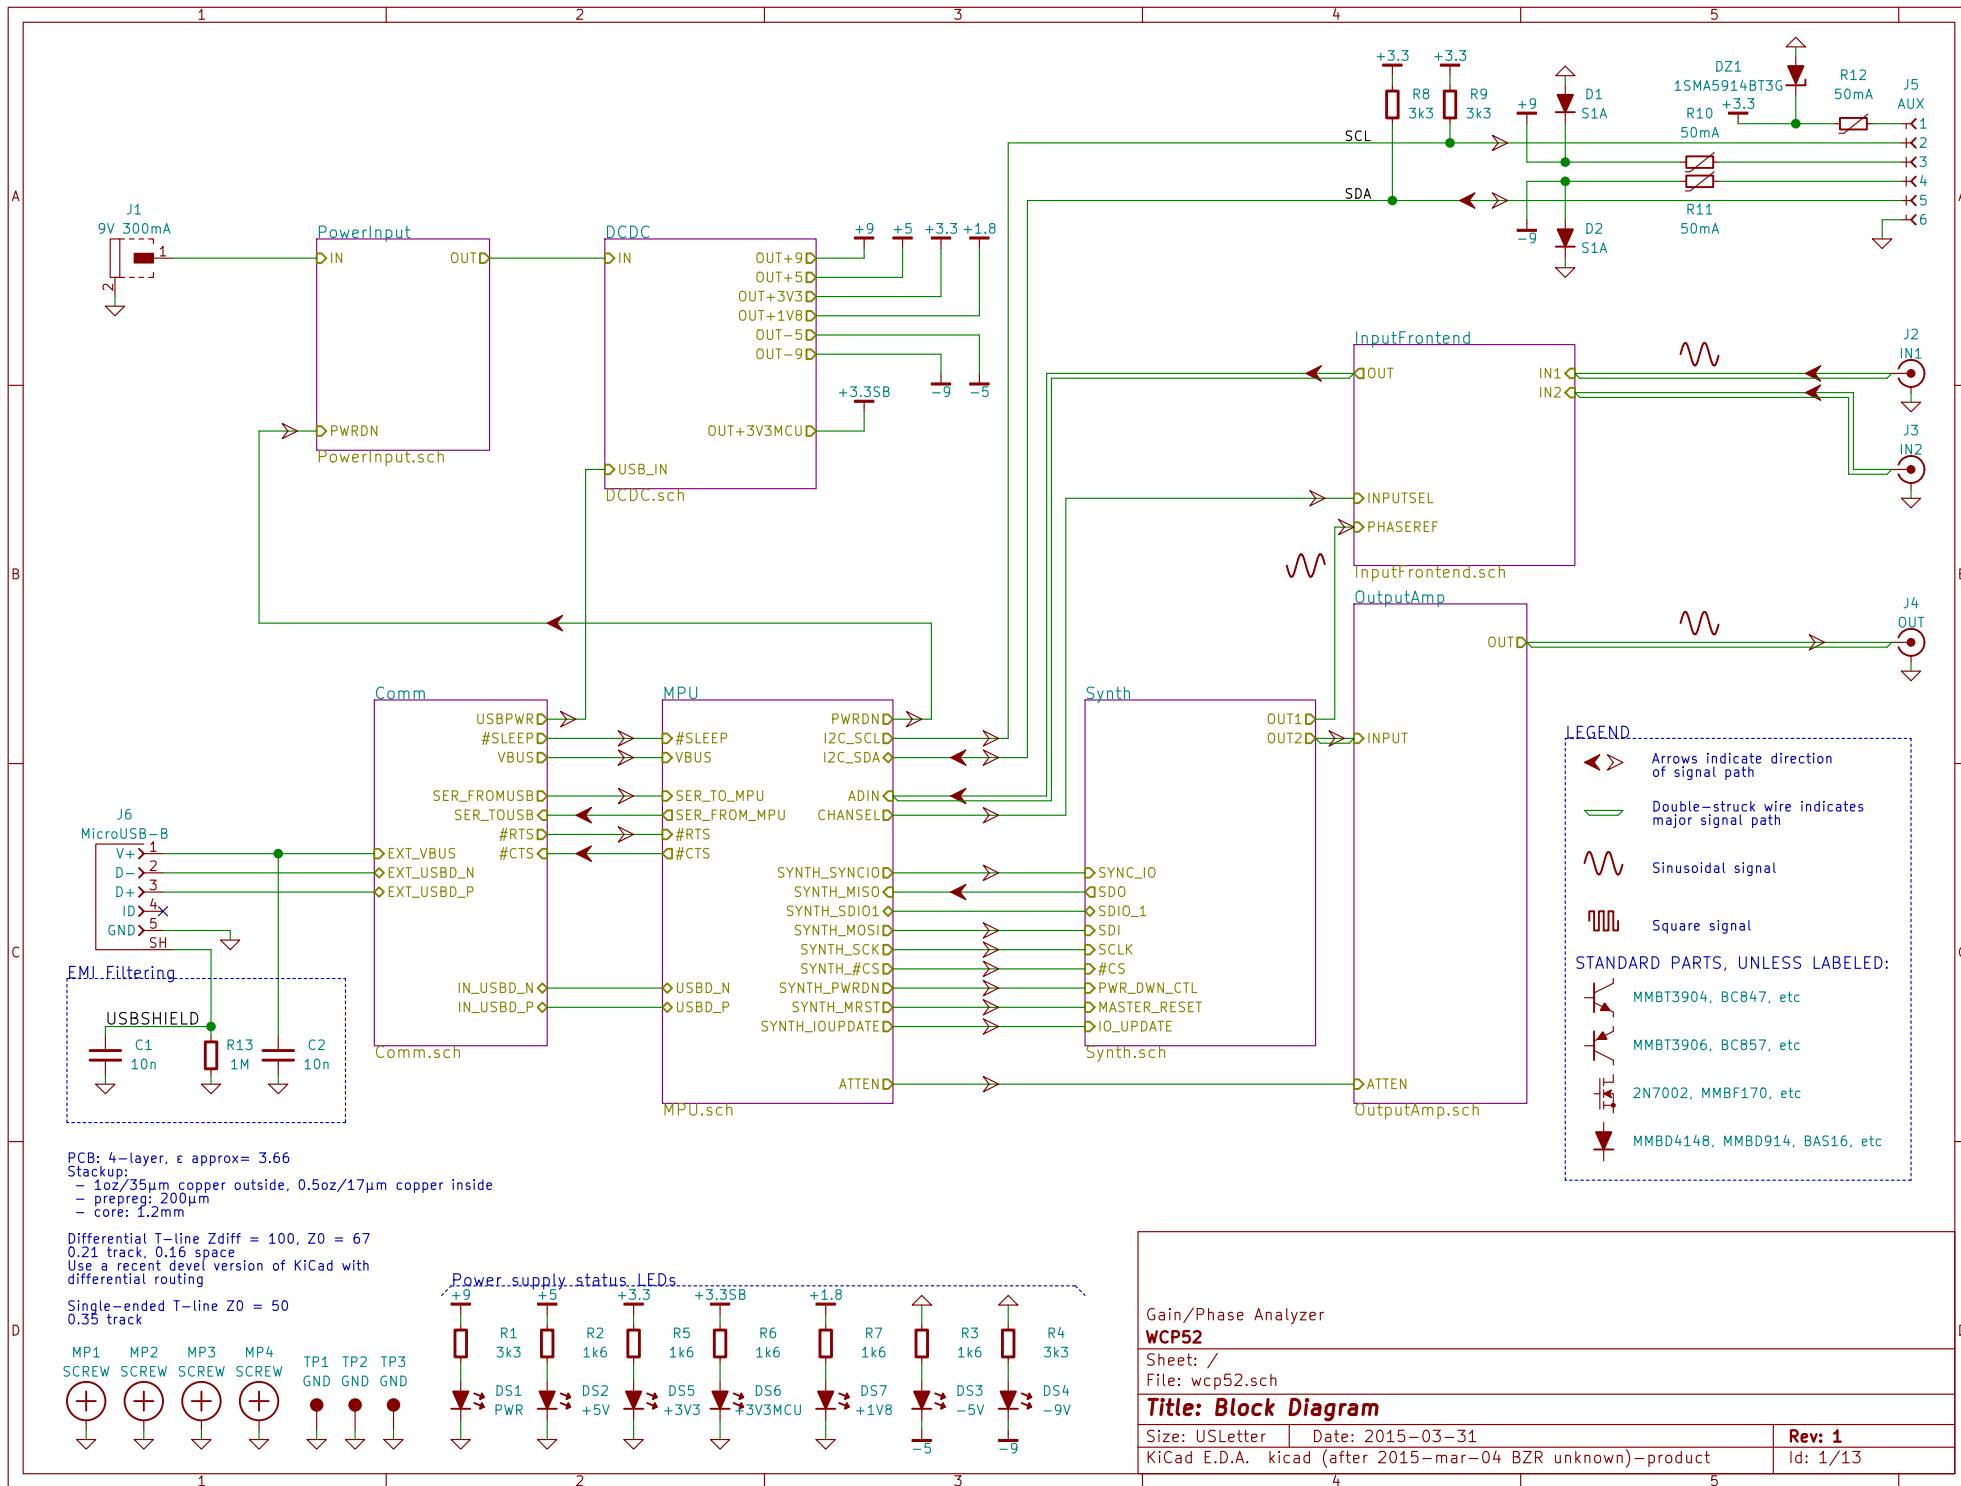




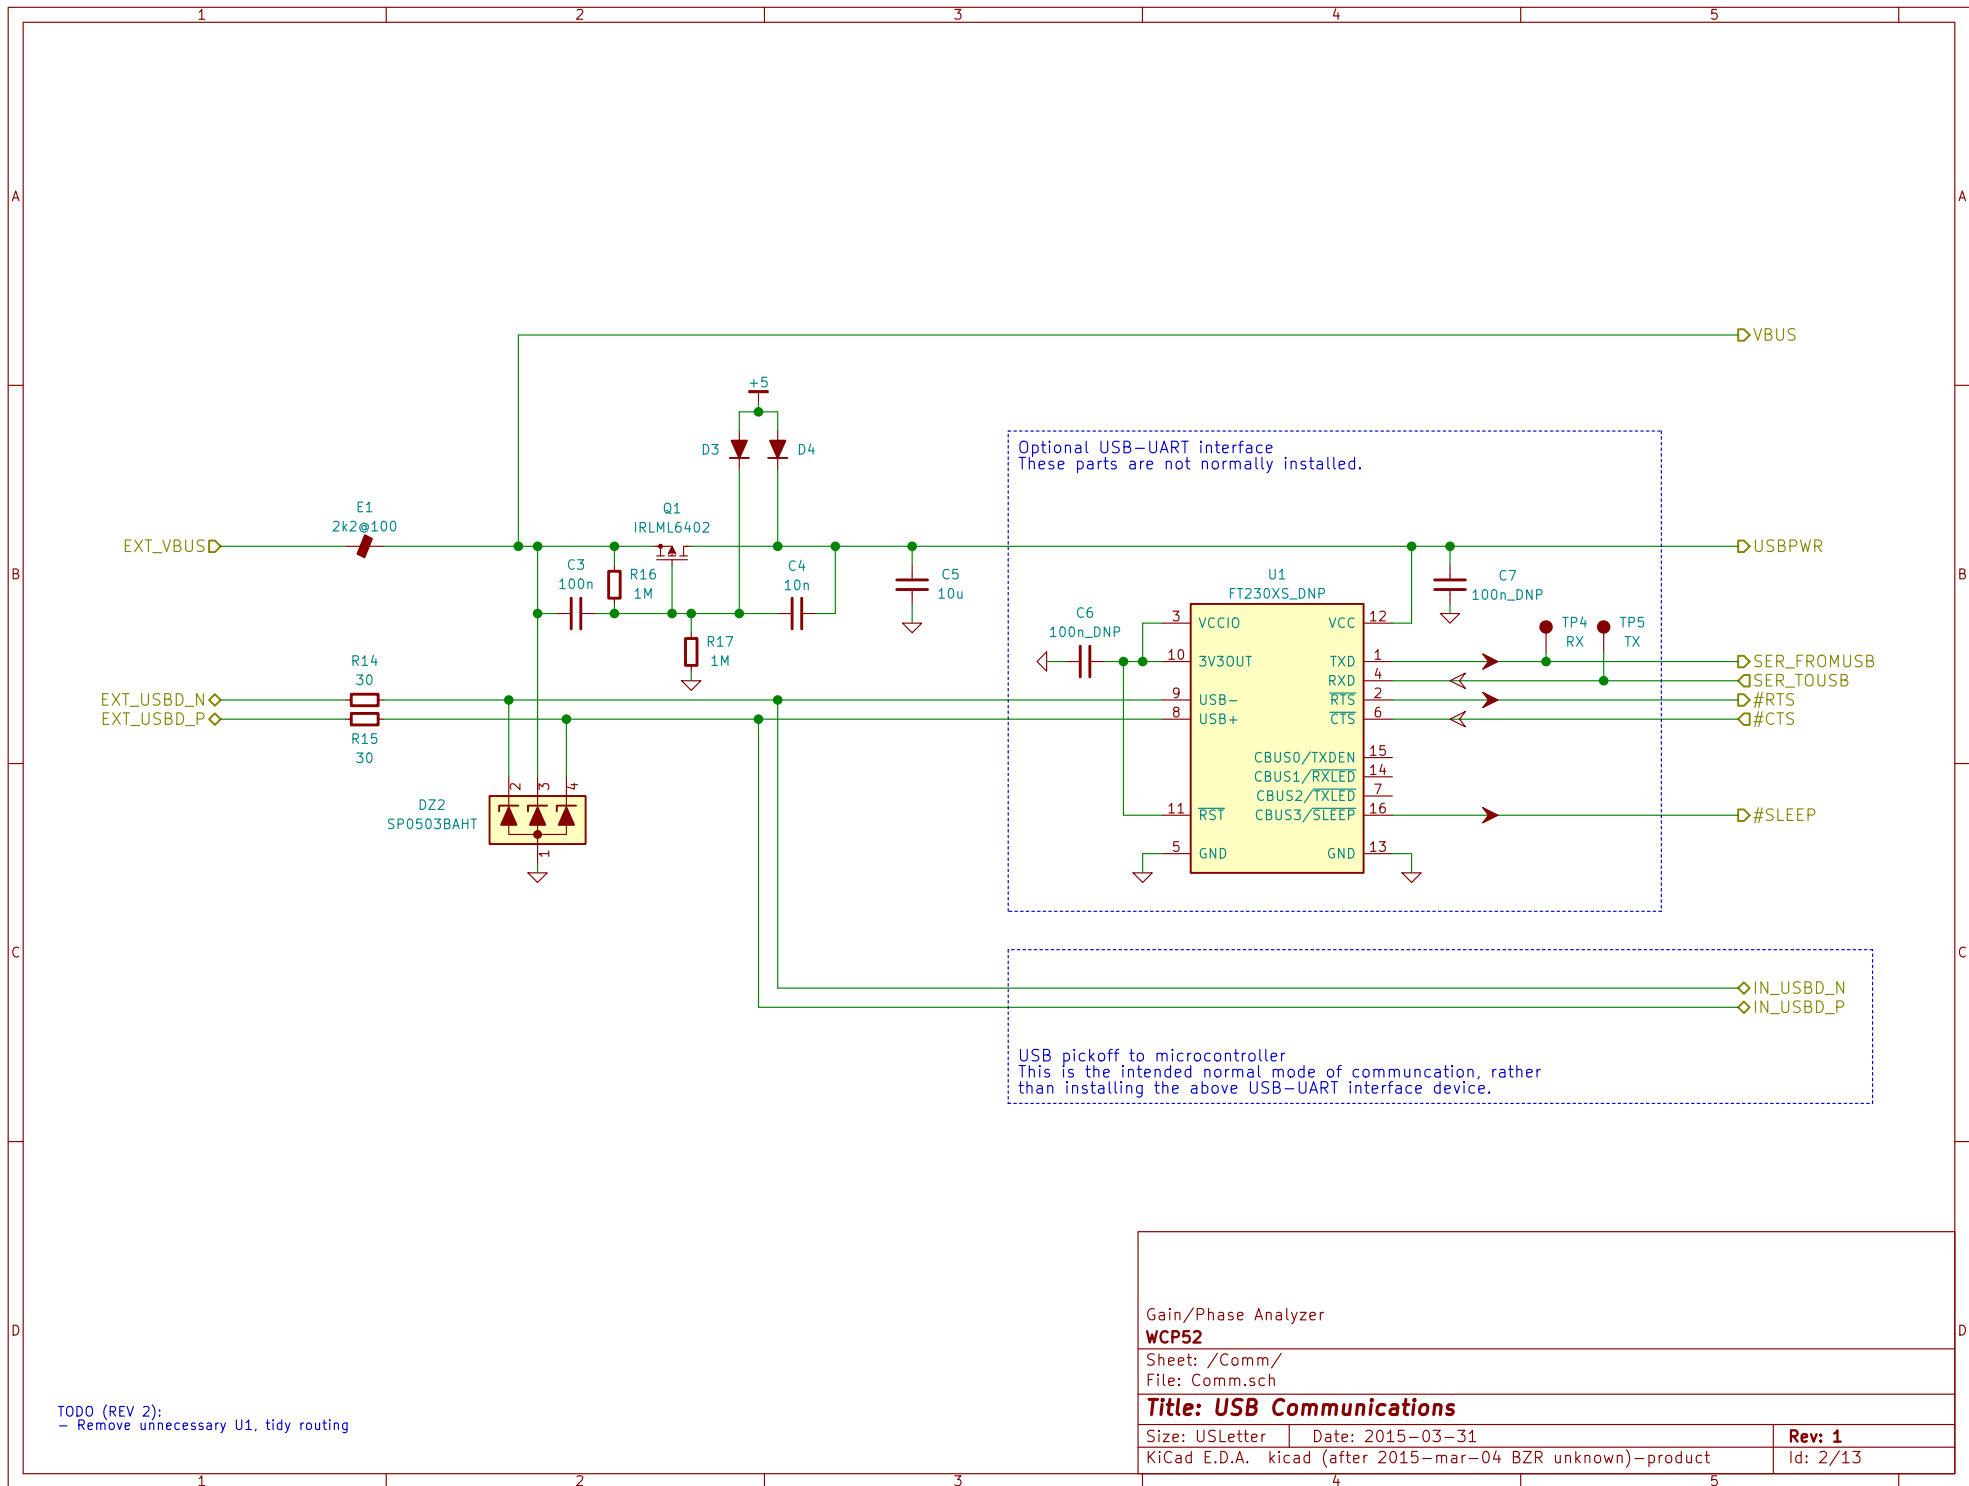

TODO (REV 2):  
- Remove unnecessary U1, tidy routing


TODO (REV 2):  
 Correction to U2/U4 differential amplifiers:  
 - Input impedance is asymmetric so termination should also be.  
 Change R24 and R25 to 57.6 ohms? Don't want to add a BOM item though, or make reactive loading asymmetric. Investigate...

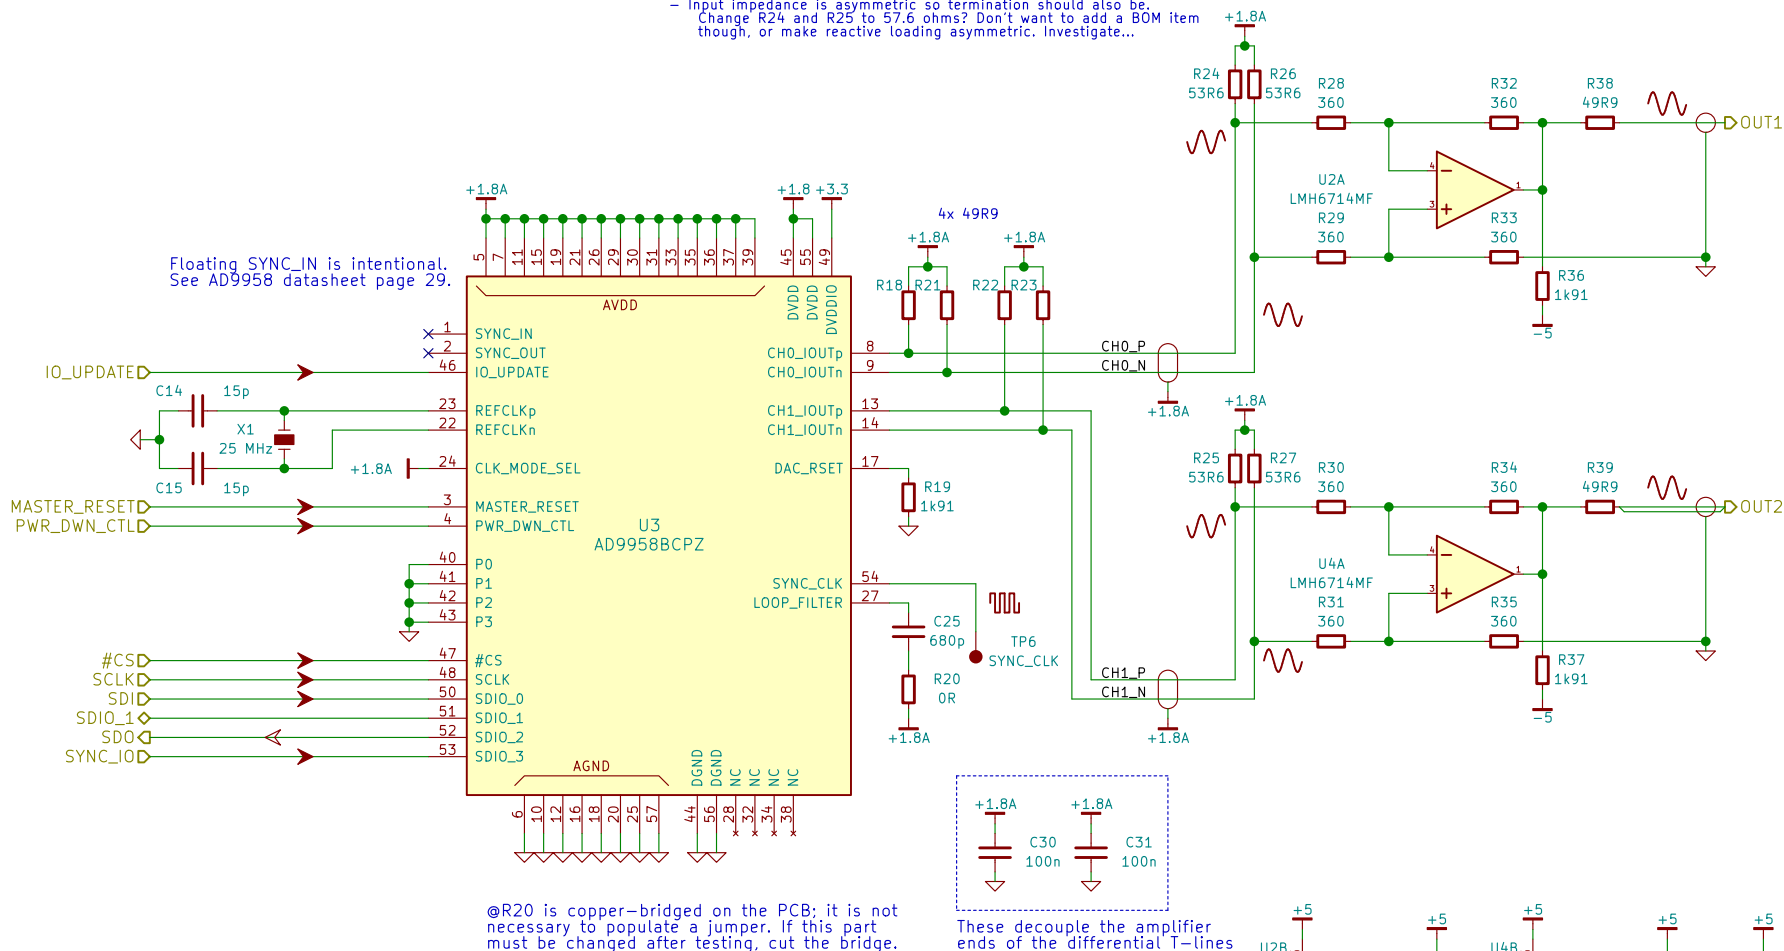

@R20 is copper-bridged on the PCB; it is not necessary to populate a jumper. If this part must be changed after testing, cut the bridge.

These decouple the amplifier ends of the differential T-lines

Power supply decoupling  
 These are distributed among @U3's power pins.

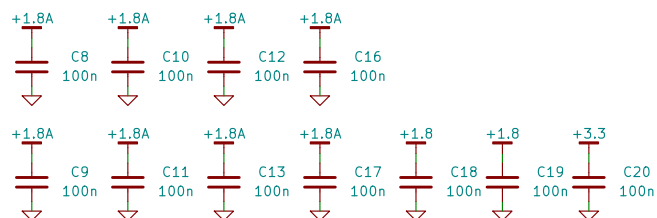

Gain/Phase Analyzer  
**WCP52**

Sheet: /Synth/  
 File: Synth.sch

**Title: Synthesizer**

Size: USLetter Date: 2015-03-31

KiCad E.D.A. kicad (after 2015-mar-04 BZR unknown)-product


Rev: 1

Id: 3/13

TODO (REV 2):

- Can we capacitively couple the signal into U5? The diff amp can produce significant offset. Cap-coupling 50R is impractical, but directly before U5 would allow removing the bias post-termination.
- Along those lines, can U5 become a transistor amplifier? BFR540?

@C42 and @R44 are optional compensation devices to boost gain slightly at high frequency, if post-fab testing shows that stray capacitance from layout results in a rolloff. In the first revision, do not populate them.

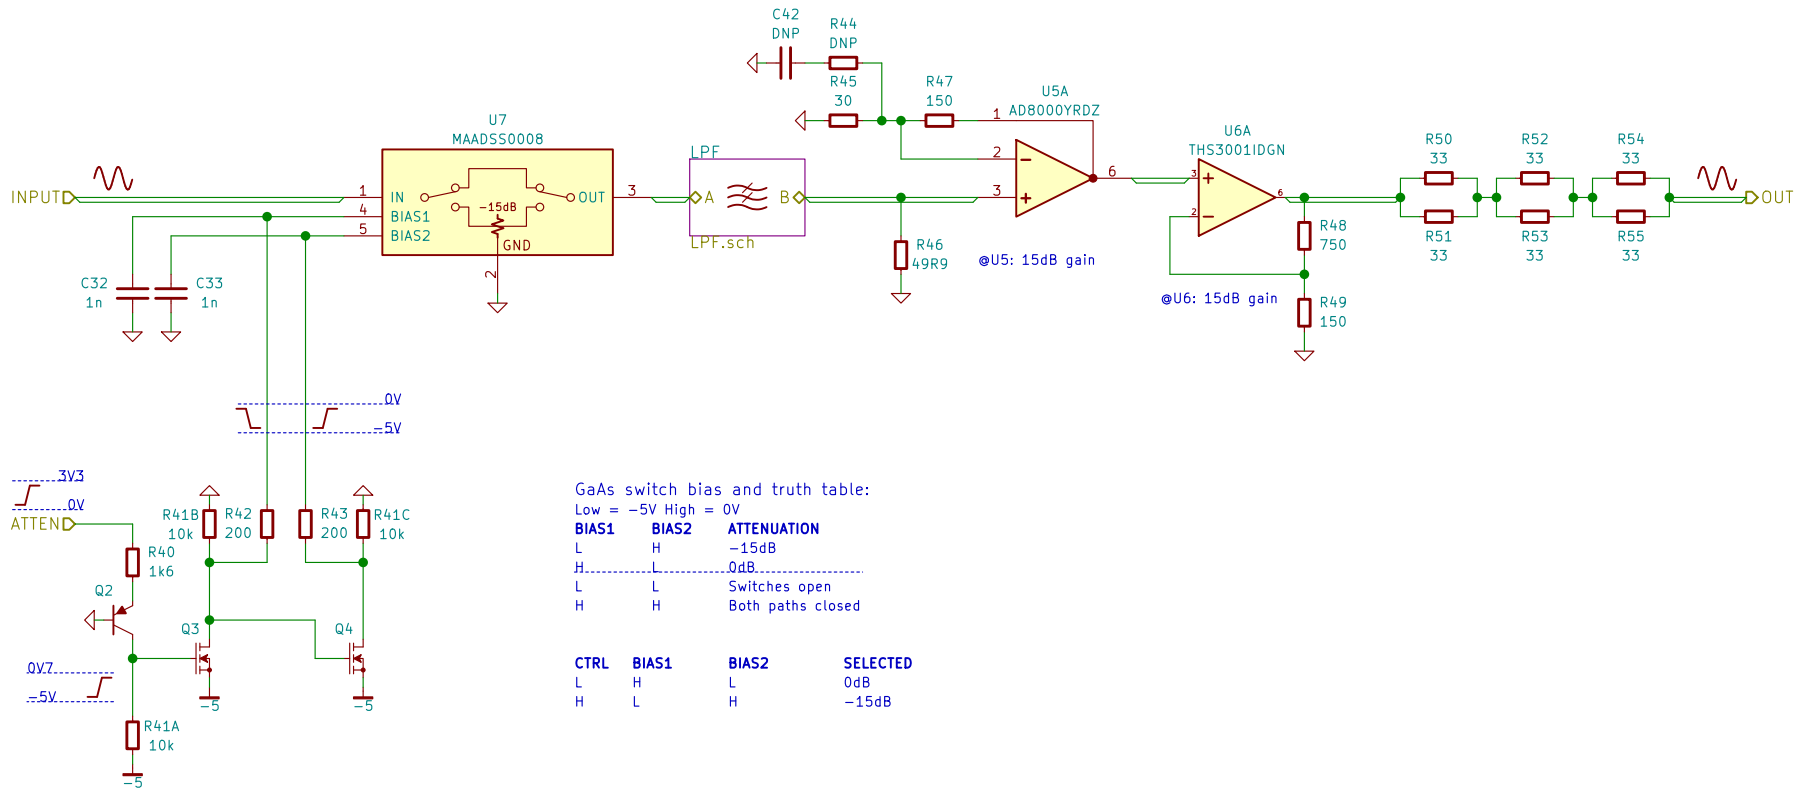

Gain/Phase Analyzer

**WCP52**

Sheet: /OutputAmp/

File: OutputAmp.sch


**Title: Output Amplifier**

Size: USLetter Date: 2015-03-31


Rev: 1

KiCad E.D.A. kicad (after 2015-mar-04 BZR unknown)-product

Id: 4/13

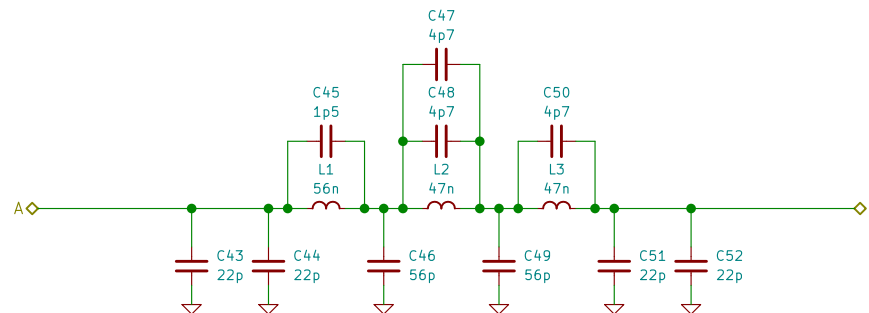

Intended frequency response of filter:

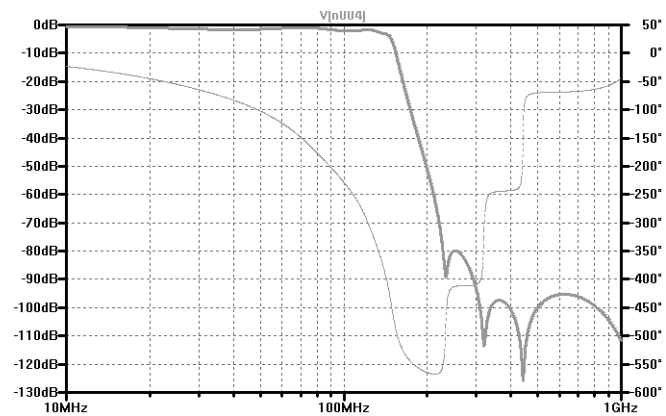

Gain/Phase Analyzer

**WCP52**

Sheet: /OutputAmp/LPF/

File: LPF.sch


**Title: LPF for Output Amplifier**


Size: USLetter Date: 2015-03-31

KiCad E.D.A. kicad (after 2015-mar-04 BZR unknown)-product

**Rev: 1**

Id: 5/13

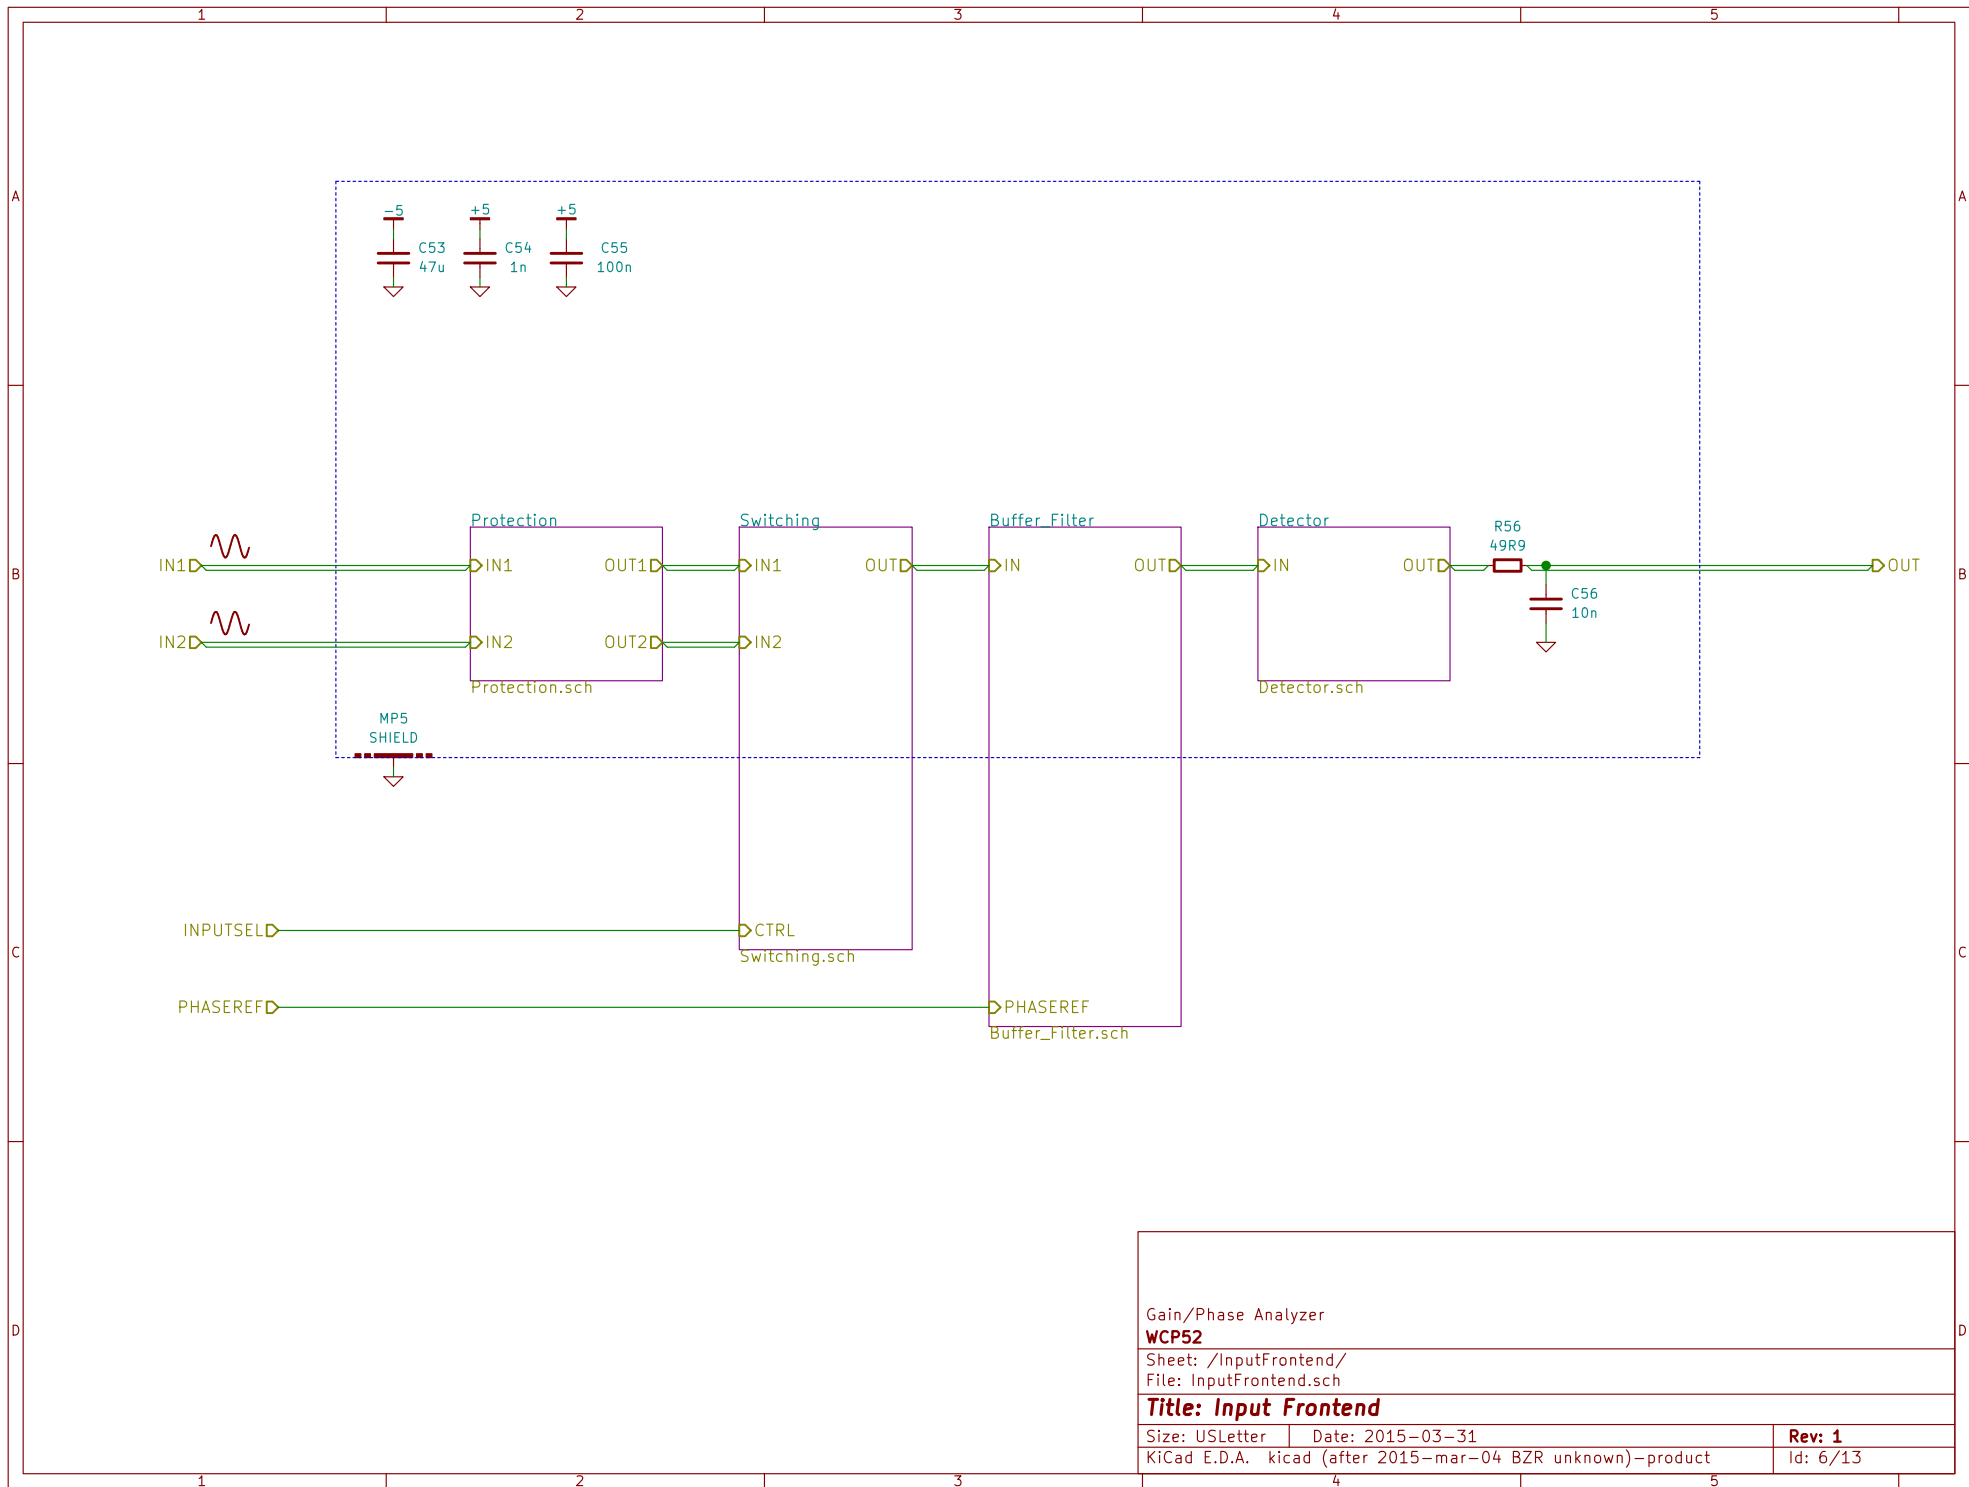

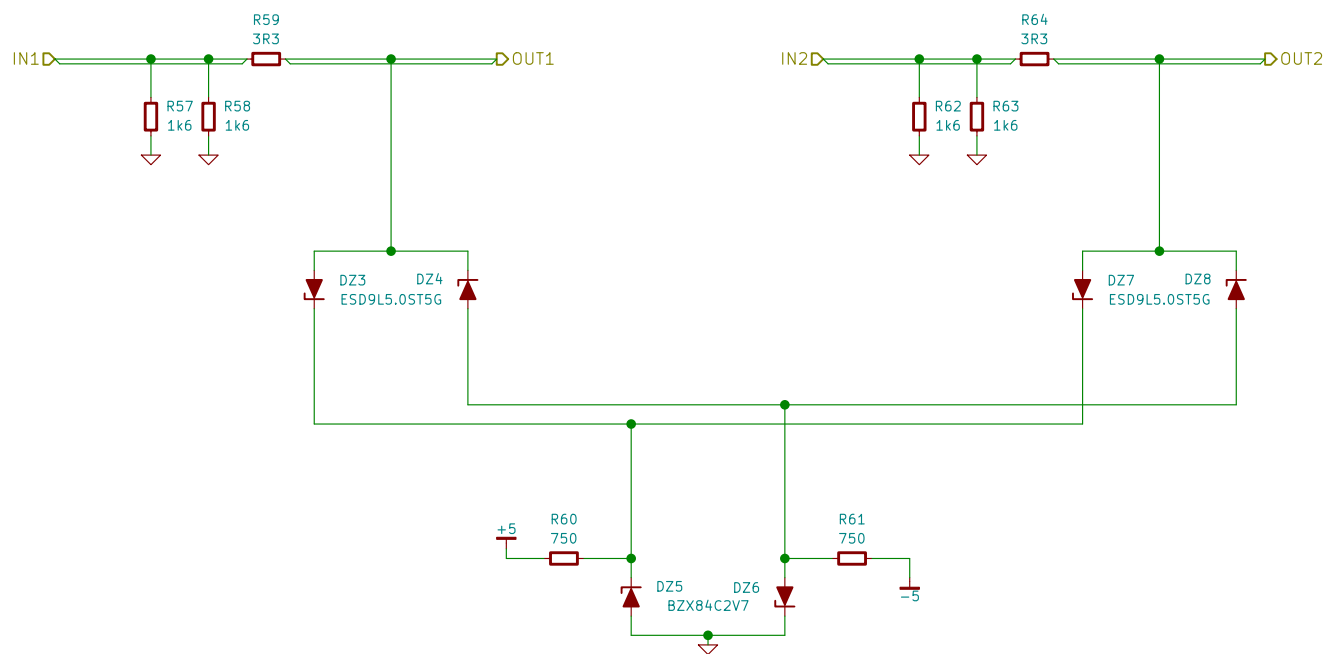

Gain/Phase Analyzer

**WCP52**

Sheet: /InputFrontend/Protection/

File: Protection.sch


**Title: Input Protection**


Size: USLetter    Date: 2015-03-31

**Rev: 1**

KiCad E.D.A.    kicad (after 2015-mar-04 BZR unknown)-product

Id: 7/13

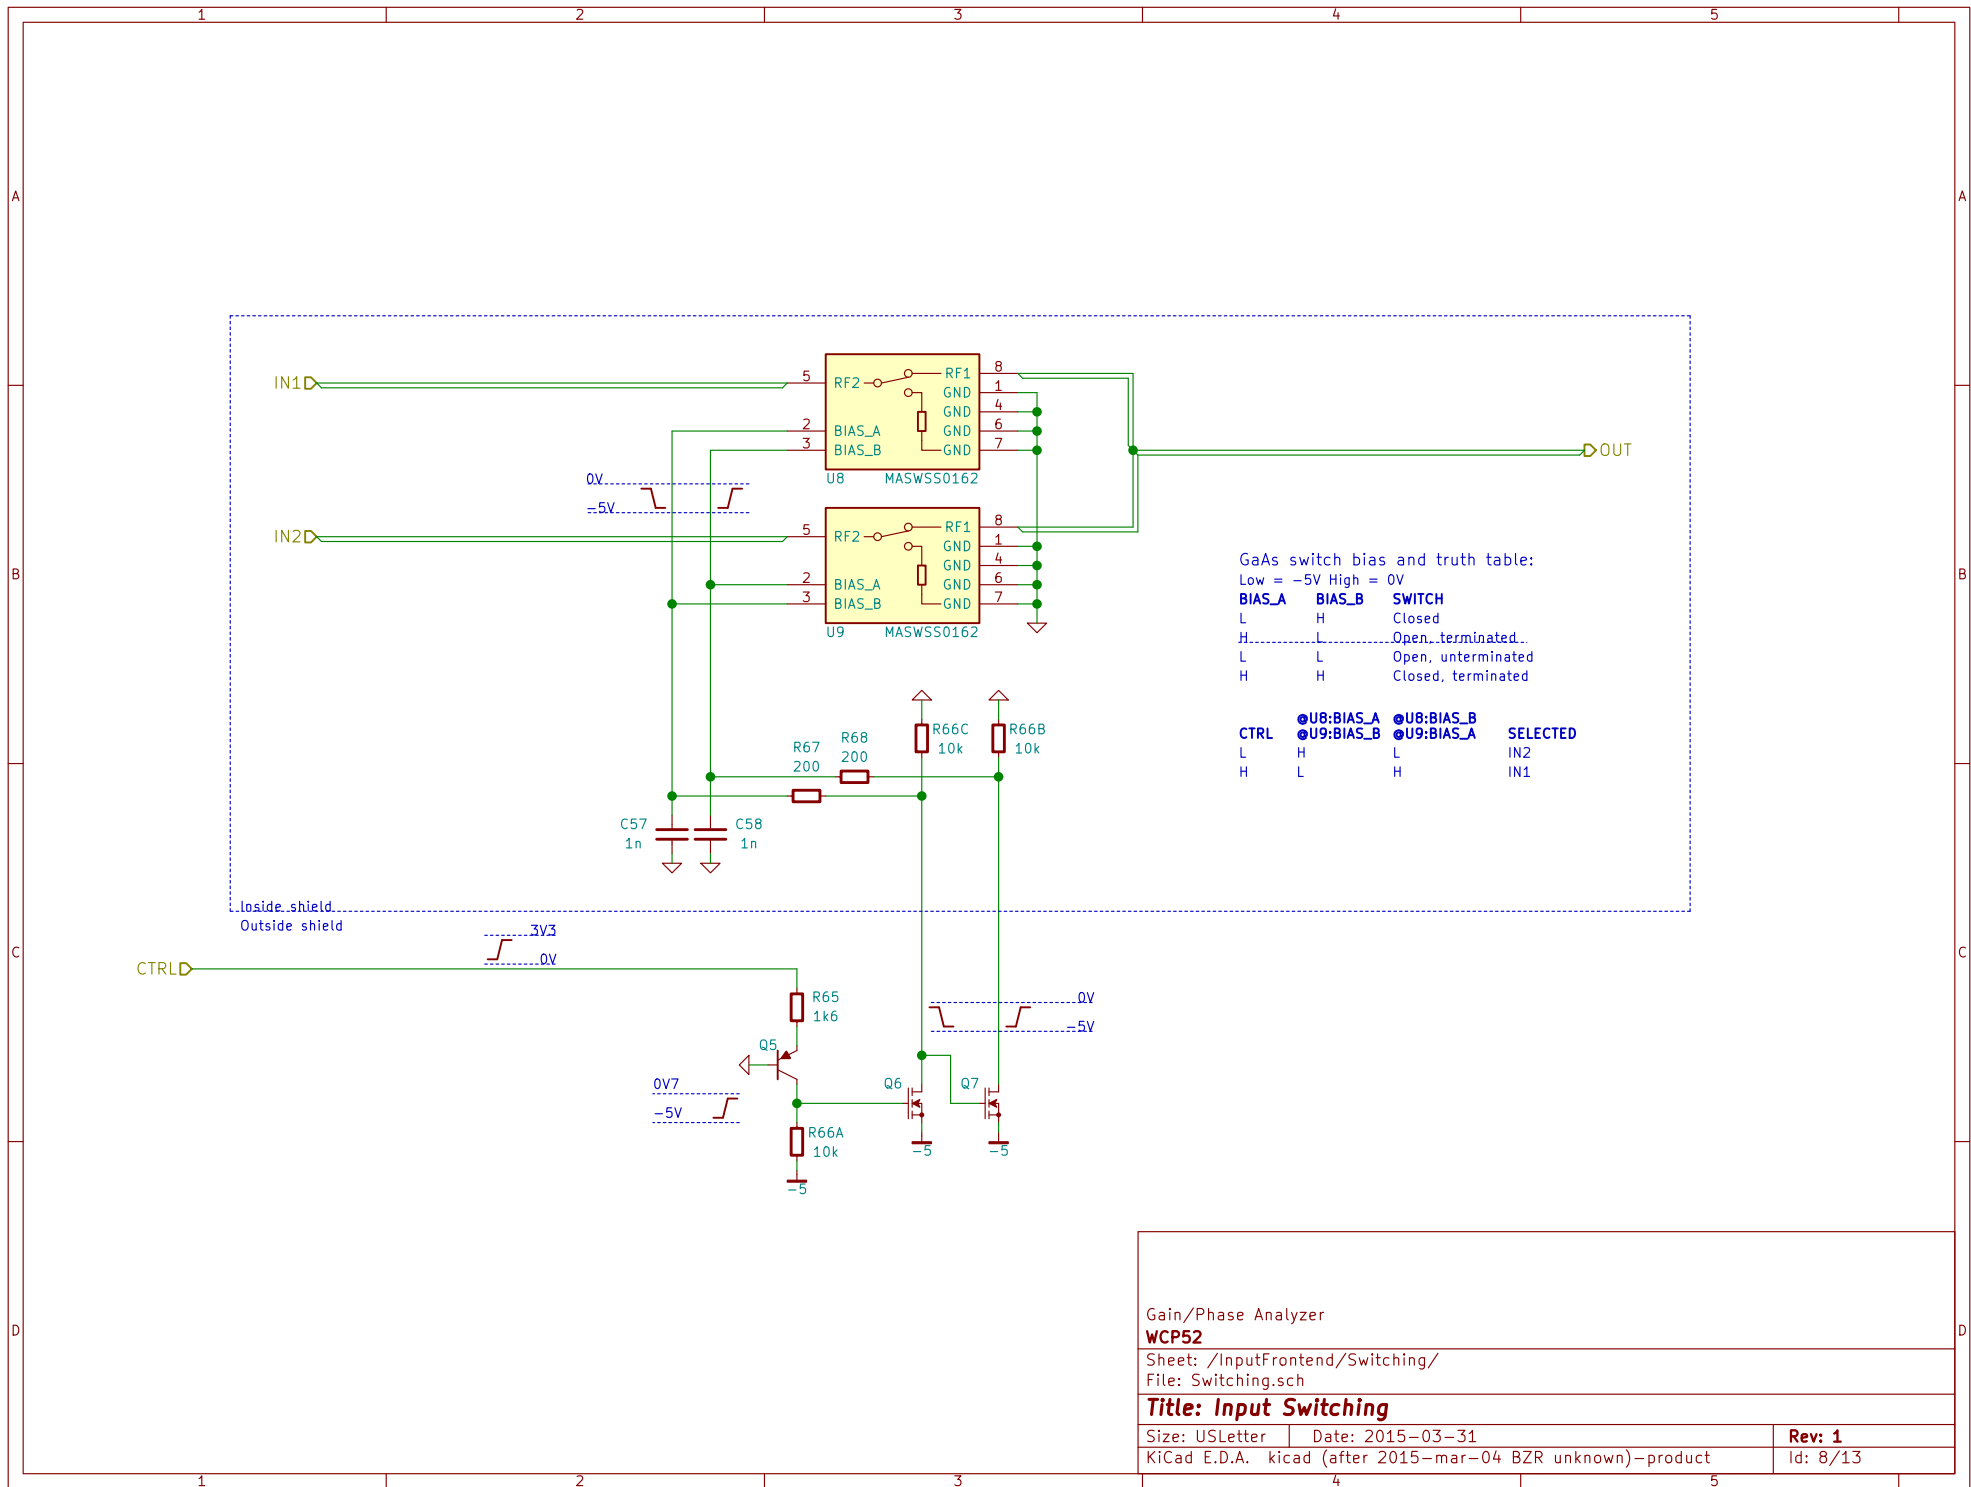

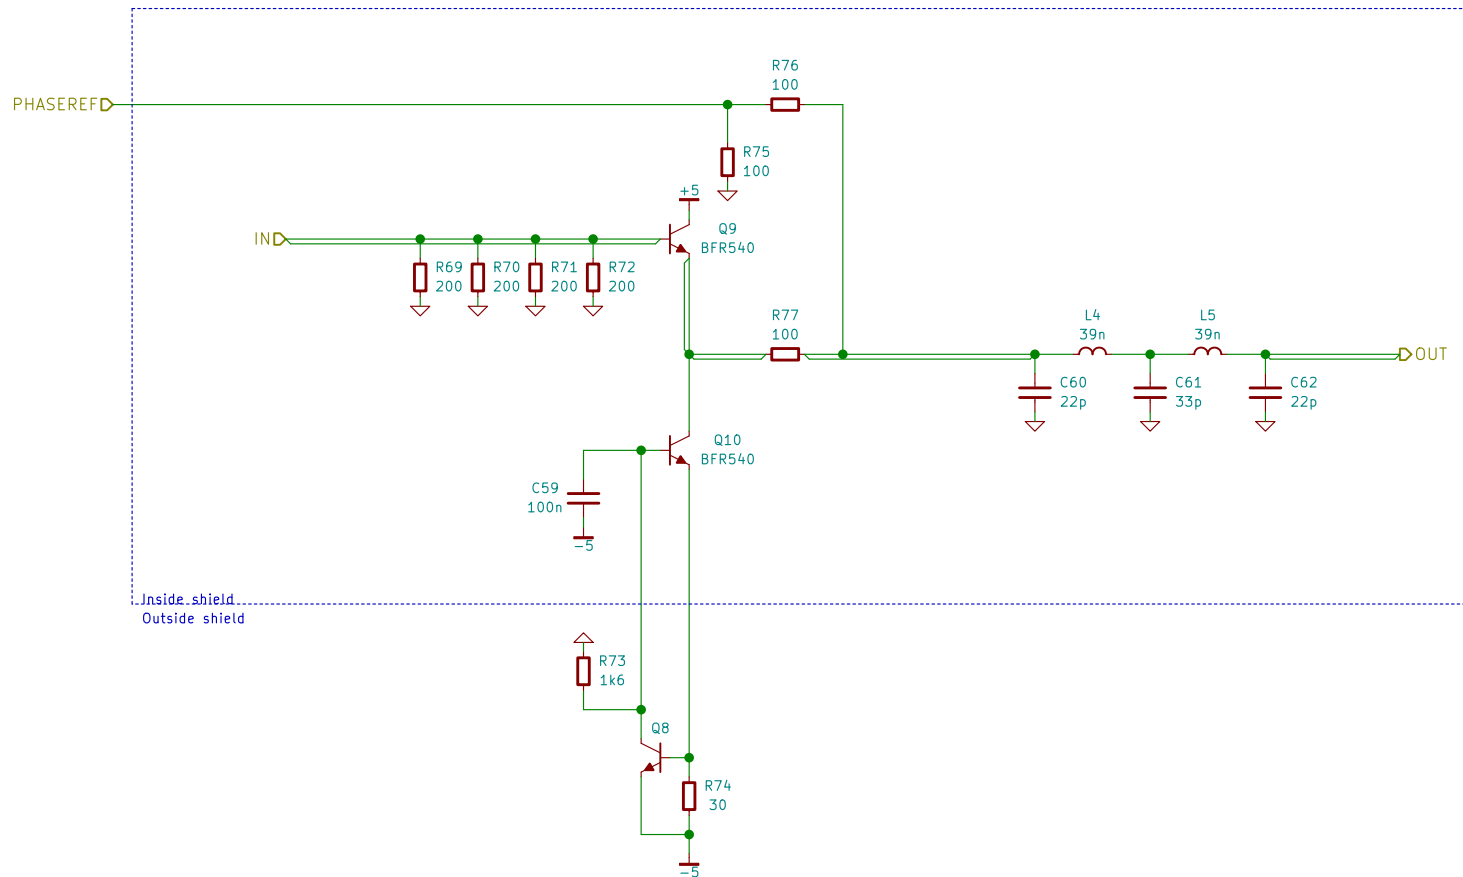

Gain/Phase Analyzer

**WCP52**

Sheet: /InputFrontend/Buffer\_Filter/

File: Buffer\_Filter.sch

**Title: Input Buffer and Filter**


Size: USLetter Date: 2015-03-31

KiCad E.D.A. kicad (after 2015-mar-04 BZR unknown)-product

**Rev: 1**

Id: 9/13



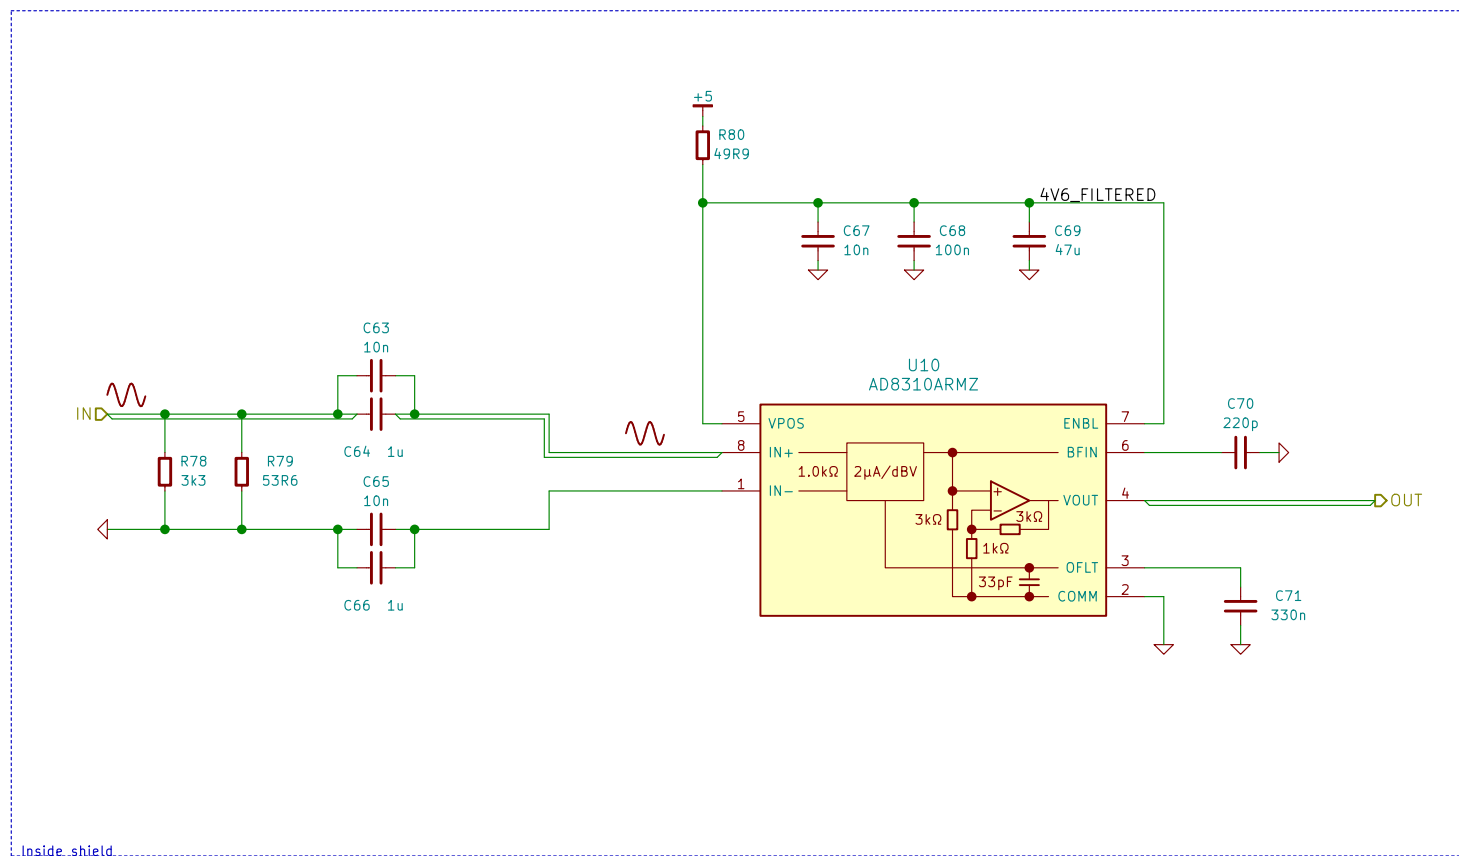

Gain/Phase Analyzer

**WCP52**

Sheet: /InputFrontend/Detector/

File: Detector.sch


**Title: Logarithmic Detector**

Size: USLetter Date: 2015-03-31


KiCad E.D.A. kicad (after 2015-mar-04 BZR unknown)-product

**Rev: 1**

Id: 10/13

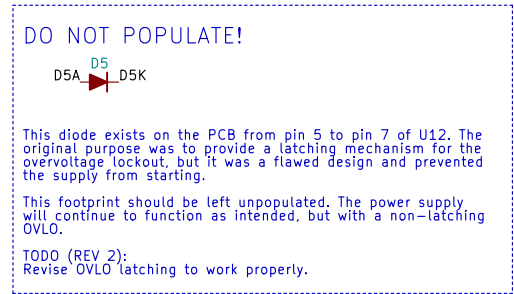

Id: 11/13

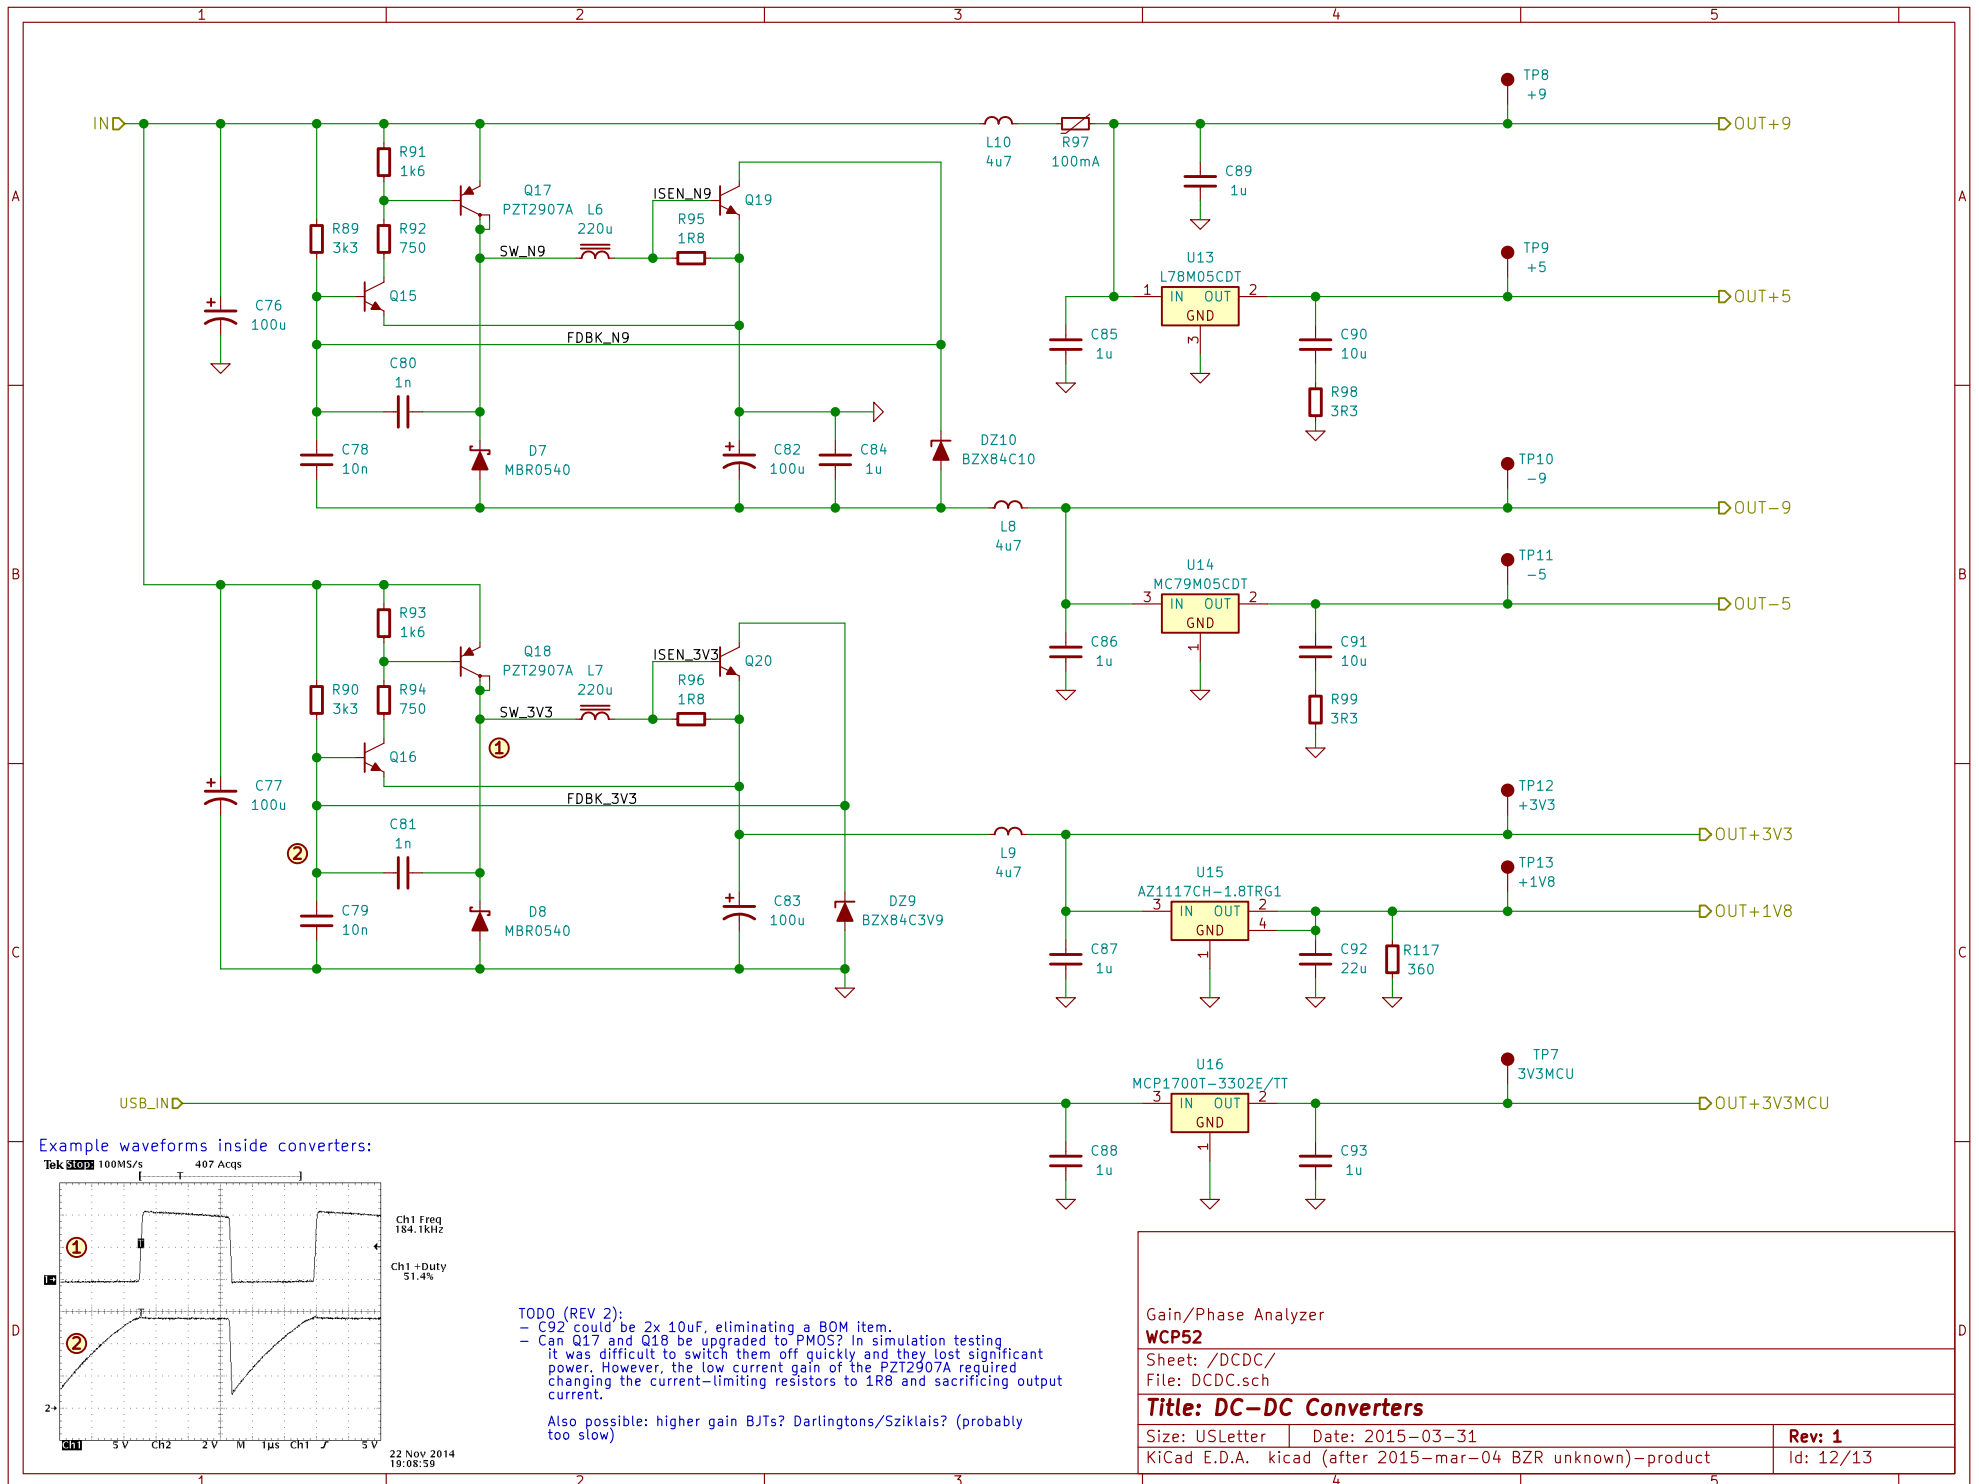



## References

- [1] Alpha & Omega Semiconductor, “AOD417 P-Channel Enhancement Mode Field Effect Transistor,” AOD417 datasheet, 2008. <http://aosmd.com/pdfs/datasheet/AOD417.pdf>
- [2] S. W. Amos and M. James, “Sawtooth generators,” in *Principles of Transistor Circuits*, 9th ed. Oxford: Newnes, 2003, ch. 14, pp. 281–292.
- [3] Analog Devices, Inc., “2-Channel, 500 MSPS DDS with 10-Bit DACs,” AD9958 datasheet, April 2013 [Revision B]. <http://www.analog.com/media/cn/technical-documentation/data-sheets/AD9958.pdf>
- [4] Diodes Incorporated, “Low Dropout Linear Regulator,” AZ1117C datasheet, October 2014 [Revision 3–2]. <http://www.diodes.com/datasheets/AZ1117C.pdf>
- [5] P. Horowitz and W. Hill, “Voltage regulators and power circuits,” in *The Art of Electronics*, 2nd ed. Cambridge: Cambridge, 1989, ch. 6, pp. 307–389.
- [6] M/A-COM Technology, “GaAs SPST Switch,” MASWSS0162 datasheet [Revision V3]. <http://cdn.macom.com/DataSheets/MASWSS0162.pdf>
- [7] Microchip Technology, “Low Quiescent Current LDO,” MCP1700 datasheet, October 2013 [Revision C]. <http://ww1.microchip.com/downloads/en/DeviceDoc/20001826C.pdf>
- [8] ON Semiconductor, “500 mA Negative Voltage Regulators,” MC79M00 series datasheet, July 2013 [Revision 15]. [http://www.onsemi.com/pub\\_link/Collateral/MC79M00-D.PDF](http://www.onsemi.com/pub_link/Collateral/MC79M00-D.PDF).
- [9] STMicroelectronics, “Precision 500 mA regulators,” L78M datasheet, June 2014 [Revision 20]. <http://www.st.com/web/en/resource/technical/document/datasheet/CD00000447.pdf>
- [10] Texas Instruments, “TL43xx Precision Programmable Reference,” TL431 datasheet, Aug. 2004 [Revised Jan. 2015]. <http://www.ti.com/lit/ds/symlink/tl431.pdf>
- [11] J. Tucker, “Using a buck converter in an inverting buck-boost topology,” *Analog Applications Journal*, Texas Instruments, fourth quarter 2007, pp. 16–19. <http://www.ti.com/lit/an/slyt286/slyt286.pdf>