


Dual Channel Analog Oscilloscope

MOS-620



EmailSupport: service@szmatrix.com

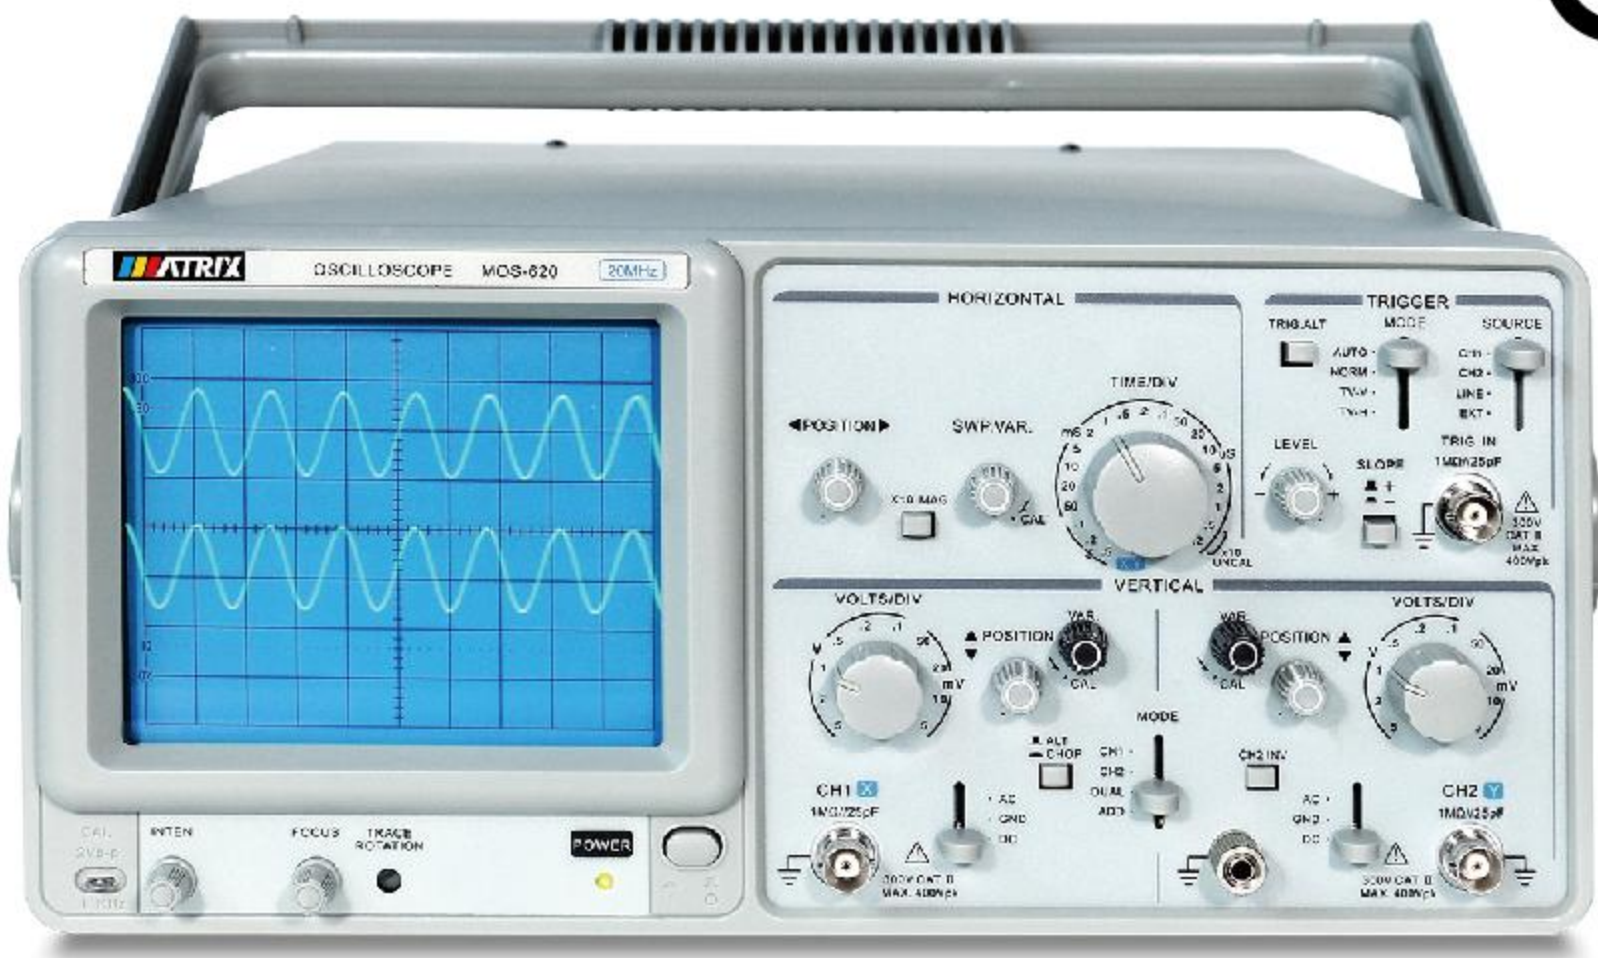

- Dual channel 20MHz
- Scan extension X10 function
- TV synchronization, X-Y mode
- High luminance, internal calibrated CRT
- Japanese electronic code switch, light and reliable
- Sealed attenuation switch is durable
- ALT trigger function, can measure two irrelevant signals

Model		MOS-620
Vertical system		Trigger
Sweep time: 0.2μSec~0.5Sec/DIV , 20 steps in 1-2-5 sequence	Trigger source: CH1, CH2, LINE,EXT	
Accuracy: ±3%	Trigger Coupling: AC: 20Hz to full bandwidth	
Fine: ≤1/2/5 panel indication scale	Trigger slope: +/-	
Sweeping magnification: 10 times	Sensitivity: 20Hz~2MHz: 1DIV TRIG-ALT: 2DIV EXT:200mV	
X10MAG sweep time accuracy: ±5% (20nSec~50nSec not calibrated)	2MHz~20MHz: 1.5DIV TRIG-ALT: 3DIV EXT:800mV	
Linear: ±5%X10MAG: ±10% (0.2s~1μs)	TV: Sync pulse > 1DIV(EXT:1V)	
Displacement caused by X10MAG: < 2DIV at the center of CRT	Trigger mode: AUTD: AUTO NORM: NORM	
X-Y mode	TV field: when you want to observe a TV signal;	
Sensitivity: same as vertical axis	TV line: (only when the sync signal is negative pulse, the TV field and TV line can be synchronized)	
Frequency range: DC~500kHz	External trigger mode model	
X-Y phase error: ≤3° (DC~50kHz)	Input impedance: Approx. 1MΩ/25pF	
Horizontal system		Calibration signal
Sensitivity: 5mV~5V/DIV, 10 steps in 1-2-5 sequence	Waveform: Square wave	
Sensitivity and accuracy: ≤3%; 1/2.5 or smaller than the panel indicating scale	Freq.: Approx.1kHz	
Frequency range: DC~20MHz	Duty cycle: <48: 52	
AC coupling: < 10Hz (100kHz 8DIV frequency response:-3dB)	Output voltage: 2Vp-p±2%	
Rise time: Approx. 17.5nS	Output impedance: Approx.1kΩ	
Input resistance: Approx. 1M/25pF	CRT oscilloscope tube	
DC balance movement: 5mV~5VDIV: ±0.5DIV	Model : 6 inch rectangular internal graticule	
Linear: When the waveform moves vertically in the center of the grid (2DIV)	Phosphor powder specifications: P31	
Amplitude change < ±0.1DIV	Acceleration voltage: Approx. 2kV (20MHz)	
Vertical mode: CH1; CH2; DUAL: CH1 and CH2 display simultaneously Speed can be selected alternately or intermittently	Valid display: 8X10DIV [1DIV=10mm(0.39in)]	
ADD: CH1 and CH2 do algebraic addition	Graticule: internal	
Intermittent repetition frequency: Approx. 250kHz	Trace rotation: adjustable at front panel	
Input coupling: AC GND DC	Technical characteristic	
Maximum input voltage: 300V peak (AC : Freq.≤1kHz)	Power source: AC 220C±10% (standard) , AC 110V/220V	
Common mode rejection ratio: >50:1 at 50kHz sine wave (Set the sensitivity of CH1 and CH2 the same)	±10% (optional) 50Hz/60Hz, 35VA Maximum	
Insulation between 2 channels (in the range of 5mV/DIV):	Dimension: 455 (W) *150(H)*310(D)mm	
> 1000:1 50kHz; > 30:1 15MHz / > 30:1 35MHz; > 30:1 45MHz	Weight: Approx. 8kg	
CH2 INV BAL: Balance point change rate ≤ 1DIV (corresponding to the scale center)		