


2026-01-22-Cardputer ADV_RF_2in1 2.0 Module


Note: All modules require the Bruce firmware to be used. Link:
[<https://github.com/pr3y/Bruce/>]

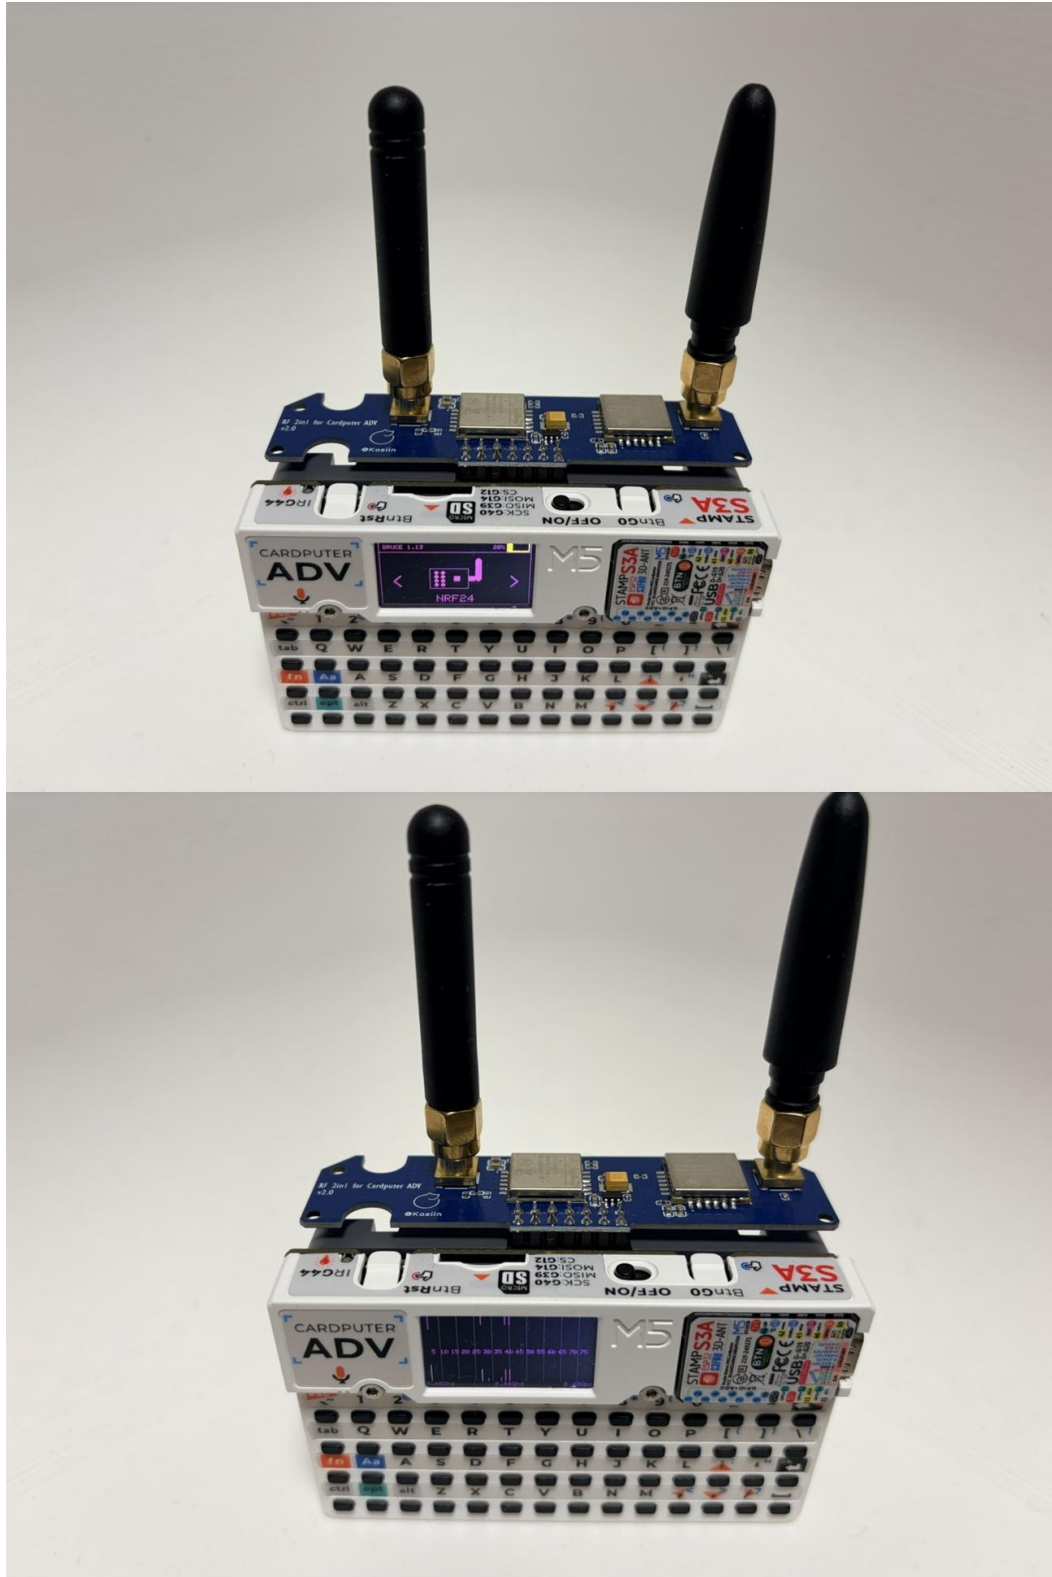

How to use:

Setup

After flashing the Bruce firmware, edit the pin configuration file “BrucePins.conf” located in the root directory of the SD card (or internal storage).

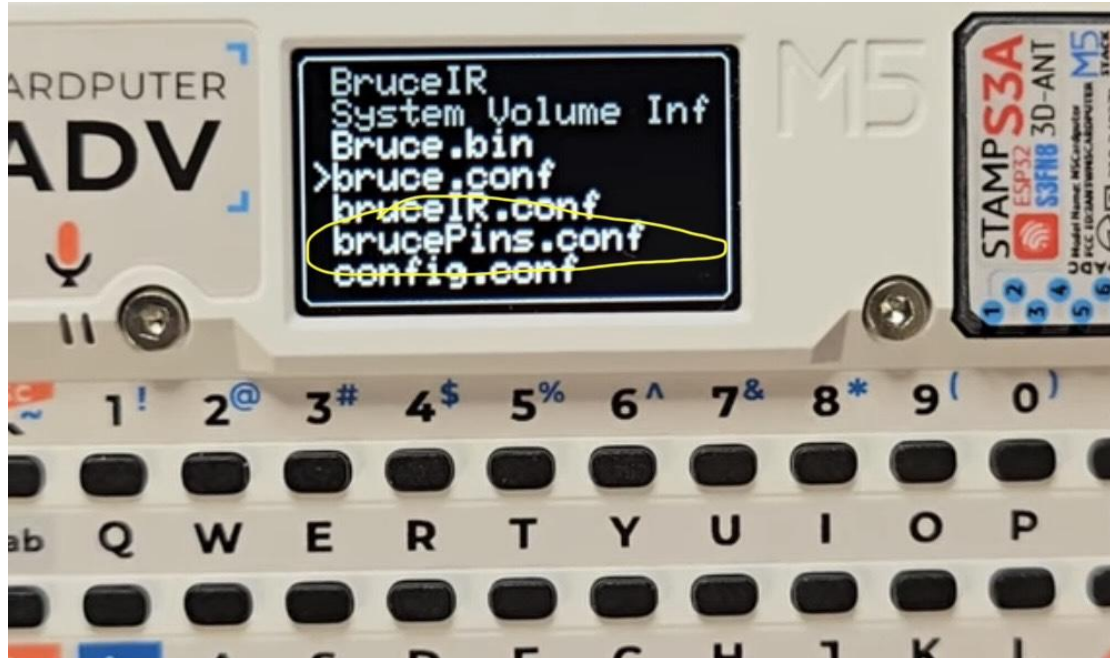


Find the CC1101_Pins, change the CS pin to 13, and change the IO0 pin to 5.




Find NRF24_Pins, and similarly change the CS pin to 6 and the IO0 pin to 4.



Install the antenna, round-tip antenna for NRF24/2.4G, stubby chili antenna for CC1101/433M.

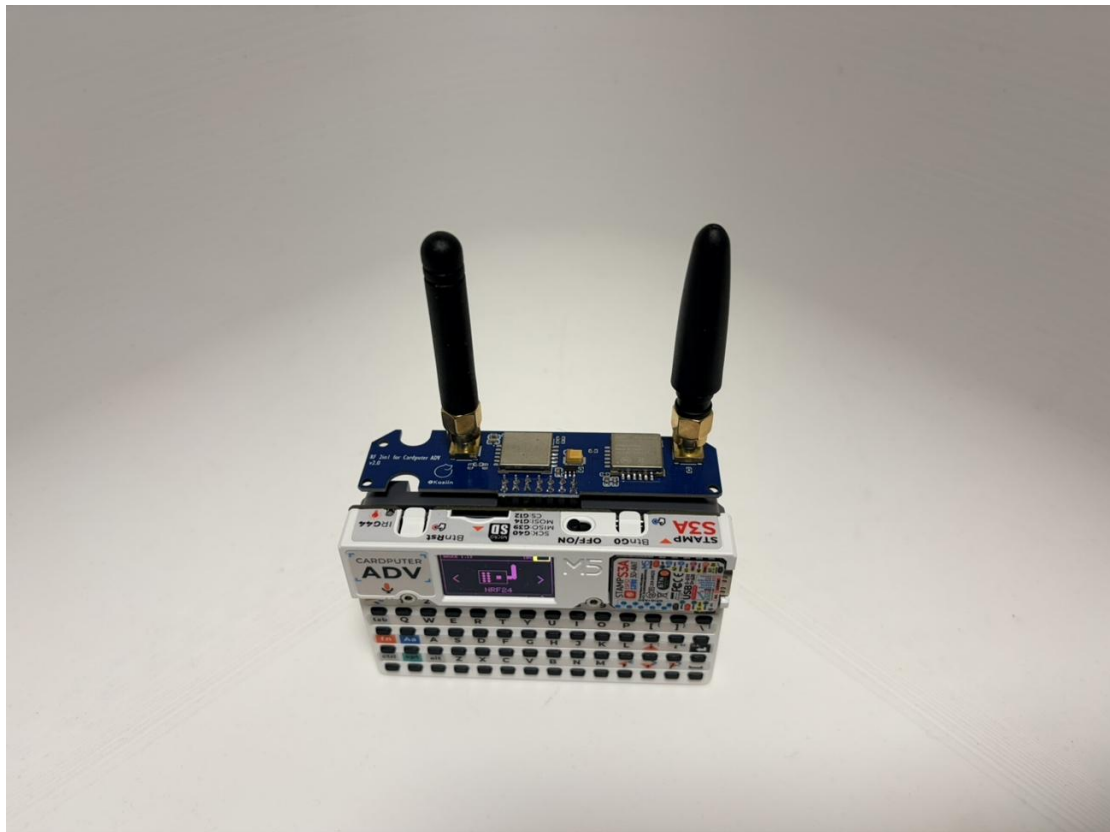

Then insert the module into the Cardputer ADV's IO slot.

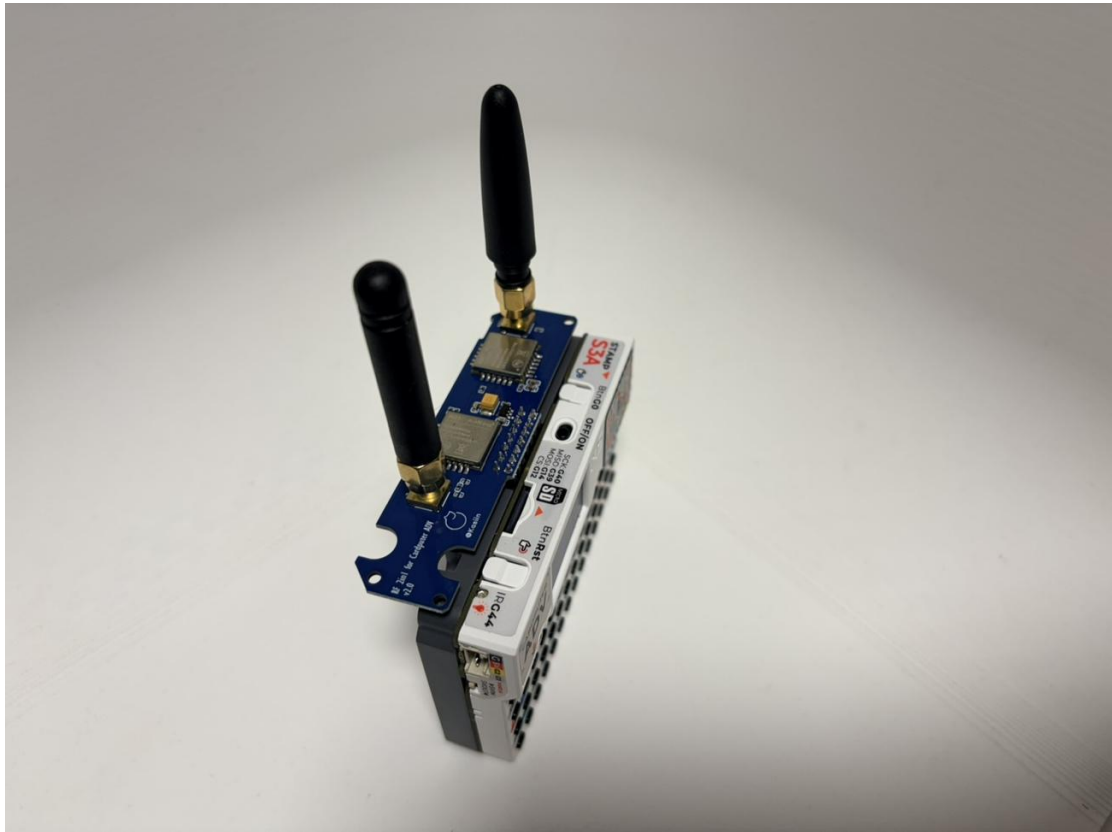

CC1101

To use the CC1101 in Bruce, turn off your Cardputer and connect the module.

Turn on the device, then navigate to "RF->Config->RF Module" and select "CC1101 on SPI" pics here.

If the "CC1101 not found" error message appears, turn off the Cardputer ADV, recheck the connection and try again.

If no error is shown, then the CC1101 is initied correctly, and you can use it in the RF menu.

For this module you can also set a custom frequency in the supported subranges: 300-348 MHZ, 387-464 MHZ and 779-928 MHZ. Setting an empty or invalid frequency will reset to the default 433.92 MHZ. This setting will only affect the receive and jamming features. Transmitting from a sub file will always use the frequency specified inside the file regardless of the user setting.

NRF24

To use the NRF24 in Bruce, turn off your Cardputer ADV and connect the module.

Turn on the device, then navigate to "NRF" .

If the "NRF not found" error message appears, turn off the Cardputer ADV, recheck the connection and try again.

If no error is shown, then the NRF24 is initited correctly, and you can use it in the NRF menu.

Warning

These apps are for educational purposes only. Please use this code responsibly and only use these apps on your own equipment.