

Cel:

Zadanie:


1. Podłącz komputery 1, 2 i 3 do przełącznika odpowiednio do portu 1, 2 i 3.
2. Wykonaj kilka poleceń ping pomiędzy komputerami tak, aby w tablicy MAC przełącznika pojawiły się odpowiednie wpisy.
3. Wyświetl tablicę MAC przełącznika i skopiuj ją do schowka.
4. Przypisz adresy MAC komputerów do odpowiednich portów przełącznika, w sposób podany w artykule.
5. Odłącz komputer 1 od portu 1 i podłącz do niego komputer intruza.
6. Wykonaj polecenie ping pomiędzy komputerem intruza, a dowolną inną stacją.
7. Jeśli zadanie zostało przez Ciebie wykonane poprawnie, port się zablokuje (zmieni kolor na czerwony).
8. Odłącz komputer intruza od portu 1, podłącz do niego komputer 1 i odblokuj port.

Uwaga: komputery mają już przypisane adresy IP (niezbędne do komunikacji między nimi), jeśli wykonujesz to ćwiczenie na własnym pliku, nie zapomnij o ustawieniu adresów IP dla komputerów.



Rozwiązanie:

1.

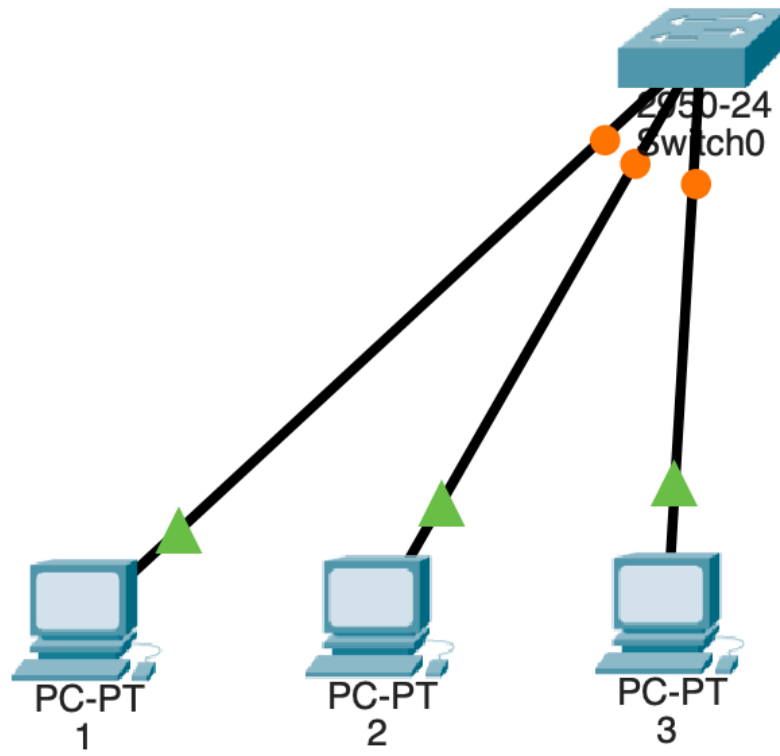

2.

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 10.0.0.2: bytes=32 time=1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 10.0.0.3

Pinging 10.0.0.3 with 32 bytes of data:

Reply from 10.0.0.3: bytes=32 time<1ms TTL=128
Reply from 10.0.0.3: bytes=32 time<1ms TTL=128
Reply from 10.0.0.3: bytes=32 time<1ms TTL=128
Reply from 10.0.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|

```

3.

Switch#show mac address-table

Mac Address Table

```

-----
Vlan      Mac Address      Type      Ports
----      -
1         0001.9641.5397   DYNAMIC   Fa0/3
1         00d0.976b.e3e5   DYNAMIC   Fa0/1
1         00e0.a32d.2420   DYNAMIC   Fa0/2
Switch#

```

Mac Address Table

Vlan Mac Address Type Ports

1 0001.9641.5397 DYNAMIC Fa0/3
1 00d0.976b.e3e5 DYNAMIC Fa0/1
1 00e0.a32d.2420 DYNAMIC Fa0/2

4.

```
Switch(config)#int f0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport port
Switch(config-if)#switchport port-security 00d0.976b.e3e5
^
% Invalid input detected at '^' marker.

Switch(config-if)#switchport port-security
Switch(config-if)#switchport port-security 00d0.976b.e3e5
^
% Invalid input detected at '^' marker.

Switch(config-if)#switchport port-security mac-a00d0.976b.e3e5
Switch(config-if)#switchport port-security mac-a
Switch(config-if)#switchport port-security mac-address 00d0.976b.e3e5
Switch(config-if)#int f0/2
Switch(config-if)#switchp m acc
Switch(config-if)#switchp port-sec mac-add 00d0.976b.e3e5
Port-security not enabled on interface FastEthernet0/2.
Switch(config-if)#switchp port-sec
Switch(config-if)#switchp port-sec mac-add 00d0.976b.e3e5
Found duplicate mac-address 00d0.976b.e3e5.
Switch(config-if)#switchp port-sec mac-add 00e0.a32d.2420
Switch(config-if)#int f0/3
Switch(config-if)#sw m acc
Switch(config-if)#sw port
Switch(config-if)#sw port mac-ad 0001.9641.5397
Switch(config-if)#
```

5.


```
Switch(config-if)#do sh mac addre
Mac Address Table
```

```
-----
```

Vlan	Mac Address	Type	Ports
----	-----	-----	----
1	0001.9641.5397	STATIC	Fa0/3
1	00d0.976b.e3e5	STATIC	Fa0/1
1	00e0.a32d.2420	STATIC	Fa0/2

```
Switch(config-if)#
```

5.

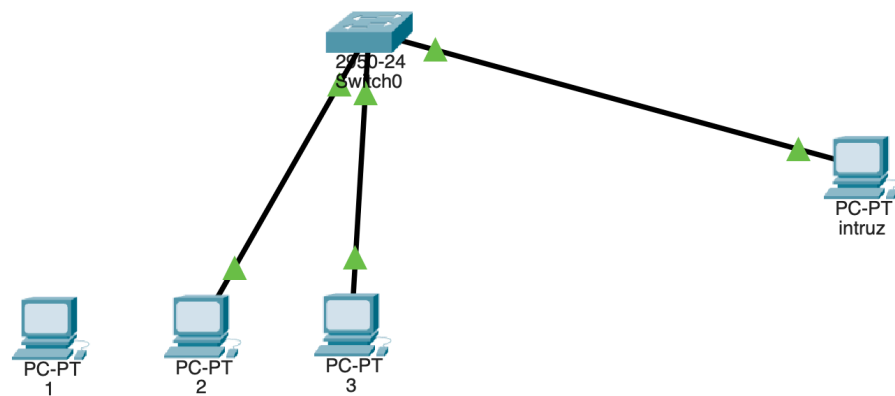

6.

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:


Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>|

```

7.

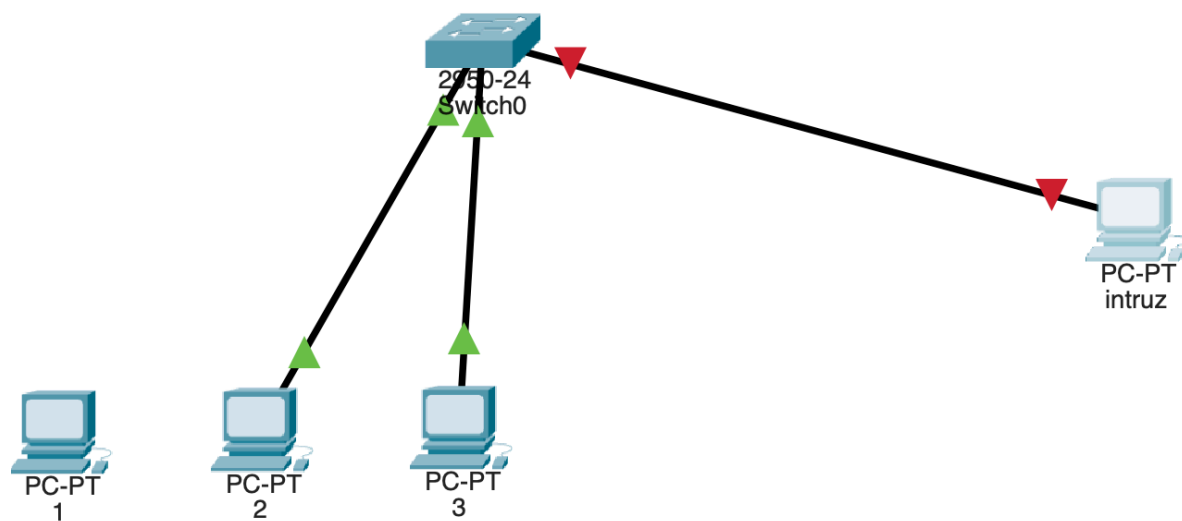

8.

```

Switch(config-if)#
Switch(config-if)#int f0/1
Switch(config-if)#shut

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to administratively down
Switch(config-if)#no shut

Switch(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

```

