



Cel:

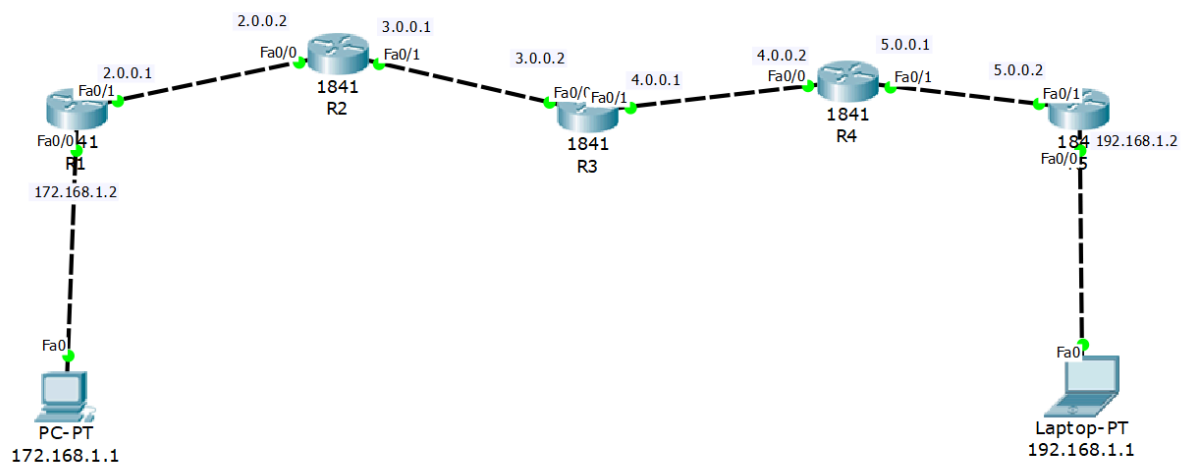

Rozwiązanie:

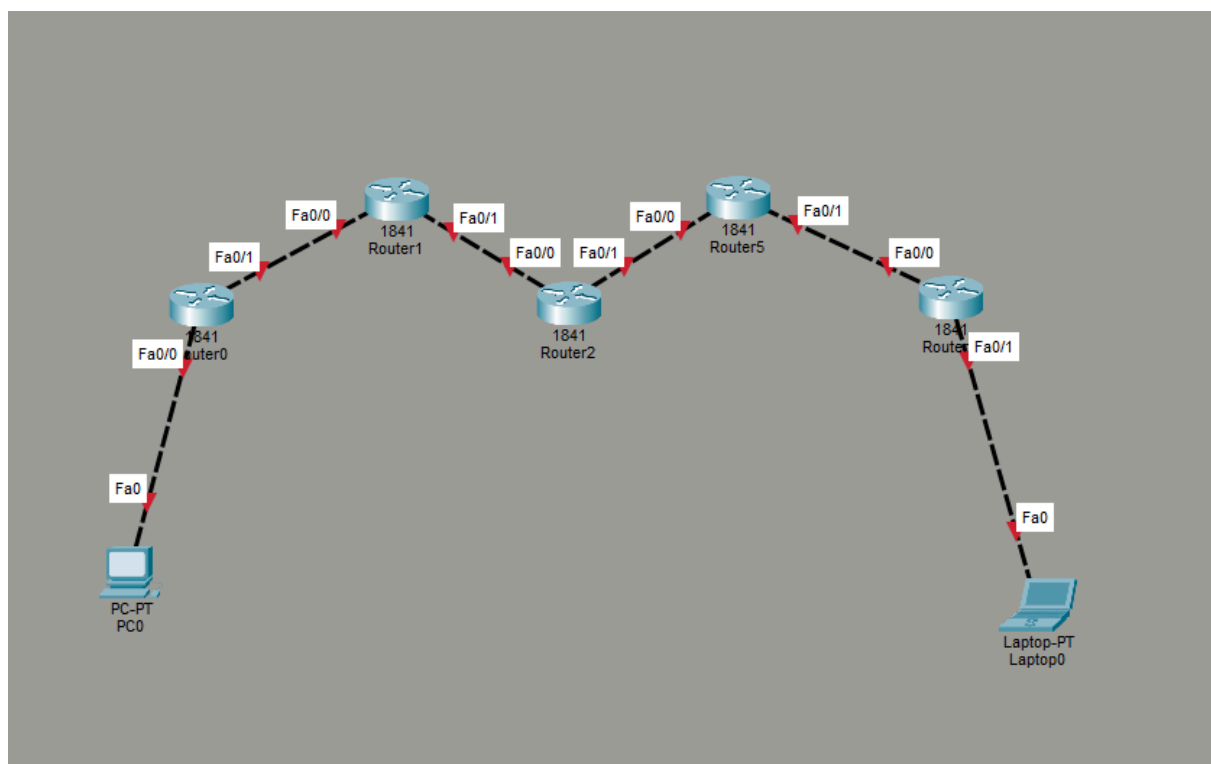

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int f0/0
Router(config-if)#ip add 172.168.1.2 255.255.255.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#int f0/1
Router(config-if)#ip add 2.0.0.1 255.255.255.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#
Router(config)#hostname R1
R1(config)#hostname R0
R0(config)#|

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#int F0/0
R1(config-if)#ip add 2.0.0.2 255.255.255.0
R1(config-if)#no shut

R1(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

R1(config-if)#int f0/1
R1(config-if)#ip add 3.0.0.1 255.255.255.0
R1(config-if)#no shut

R1(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

R1(config-if)#|

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R2
R2(config)#int f0/0
R2(config-if)#ip add 3.0.0.2 255.255.255.0
R2(config-if)#
R2(config-if)#no shut

R2(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

R2(config-if)#int f0/1
R2(config-if)#ip add 4.0.0.1 255.255.255.0
R2(config-if)#no shut

R2(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

R2(config-if)#|
```

```

Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#hostname R5
R5(config)#int f0/0
R5(config-if)#ip add 4.0.0.1 255.255.255.0
R5(config-if)#no shut

R5(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
%IP-4-DUPADDR: Duplicate address 4.0.0.1 on FastEthernet0/0, sourced by 0060.3EC6.7702
%IP-4-DUPADDR: Duplicate address 4.0.0.1 on FastEthernet0/0, sourced by 0060.3EC6.7702

R5(config-if)#int f0/1
R5(config-if)#ip add 5.0.0.2 255.255.255.0
R5(config-if)#no shut

R5(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

R5(config-if)#int f0/0
R5(config-if)#ip add 4.0.0.2 255.255.255.0
R5(config-if)#no shut
R5(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%IP-4-DUPADDR: Duplicate address 5.0.0.2 on FastEthernet0/1, sourced by 0010.1127.9901
%IP-4-DUPADDR: Duplicate address 5.0.0.2 on FastEthernet0/1, sourced by 0010.1127.9901

R5(config-if)#int f0/1
R5(config-if)#ip add 5.0.0.1 255.255.255.0
R5(config-if)#

Router>en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#hostname R6
R6(config)#int f0/0
R6(config-if)#ip add 5.0.0.2 255.255.255.0
R6(config-if)#no shut

R6(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
%IP-4-DUPADDR: Duplicate address 5.0.0.2 on FastEthernet0/0, sourced by 0001.637D.BD02
%IP-4-DUPADDR: Duplicate address 5.0.0.2 on FastEthernet0/0, sourced by 0001.637D.BD02

R6(config-if)#ip add 5.0.0.2 255.255.255.0
R6(config-if)#int f0/1
R6(config-if)#ip add 192.168.1.2 255.255.255.0
R6(config-if)#no shut

R6(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

R6(config-if)#

```

IP Configuration	
☒ DHCP	☒ Static
IPv4 Address	172.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	172.168.1.2
DNS Server	0.0.0.0

IP Configuration

☒ DHCP

☒ Static

IPv4 Address

192.168.1.1

Subnet Mask

255.255.255.0

Default Gateway

192.168.1.2

DNS Server

0.0.0.0

Teraz RIP

```

R0(config)#
R0(config)#
R0(config)#router rip
R0(config-router)#version 2
R0(config-router)#no auto-summary
R0(config-router)#network 172.168.1.0 ?
<cr>
R0(config-router)#network 172.168.1.0
R0(config-router)#network 2.0.0.0
R0(config-router)#pass
R0(config-router)#passive-interface f0/0
R0(config-router)#

R1(config-if)#
R1(config-if)#router rip
R1(config-router)#version 2
R1(config-router)#no aut
R1(config-router)#no auto-summary
R1(config-router)#net
R1(config-router)#network 2.0.0.0
R1(config-router)#network 3.0.0.0
R1(config-router)#

R2(config-if)#
R2(config-if)#router rip
R2(config-router)#version 2
R2(config-router)#no au
R2(config-router)#no auto-summary
R2(config-router)#net
R2(config-router)#network 3.0.0.0
R2(config-router)#network 4.0.0.0
R2(config-router)#

R5(config-if)#int f0/1
R5(config-if)#ip add 5.0.0.1 255.255.255.0
R5(config-if)#
R5(config-if)#do sh ip int br

```

Interface	IP-Address	OK?	Method	Status	Protocol
FastEthernet0/0	4.0.0.2	YES	manual	up	up
FastEthernet0/1	5.0.0.1	YES	manual	up	up
Vlan1	unassigned	YES	unset	administratively down	down

```

R5(config-if)#
R5(config-if)#router rip
R5(config-router)#ver 2
R5(config-router)#no au
R5(config-router)#no auto-summary
R5(config-router)#net 4.0.0.0
R5(config-router)#net 5.0.0.0
R5(config-router)#

R6(config-if)#router rip
R6(config-router)#ver 2
R6(config-router)#no au
R6(config-router)#net 5.0.0.0
R6(config-router)#net 192.168.1.0
R6(config-router)#

```

testowanie pingow kompow:

```
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.1: bytes=32 time<1ms TTL=123
Reply from 192.168.1.1: bytes=32 time<1ms TTL=123
Reply from 192.168.1.1: bytes=32 time=1ms TTL=123

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=123
Reply from 192.168.1.1: bytes=32 time=12ms TTL=123
Reply from 192.168.1.1: bytes=32 time=1ms TTL=123
Reply from 192.168.1.1: bytes=32 time<1ms TTL=123

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 3ms

C:\>
```

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 172.168.1.1

Pinging 172.168.1.1 with 32 bytes of data:

Reply from 172.168.1.1: bytes=32 time=7ms TTL=123
Reply from 172.168.1.1: bytes=32 time<1ms TTL=123
Reply from 172.168.1.1: bytes=32 time<1ms TTL=123
Reply from 172.168.1.1: bytes=32 time=14ms TTL=123

Ping statistics for 172.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 14ms, Average = 5ms

C:\>|
```

smiga!