



TOOLS AND COMPONENTS



Beginner friendly

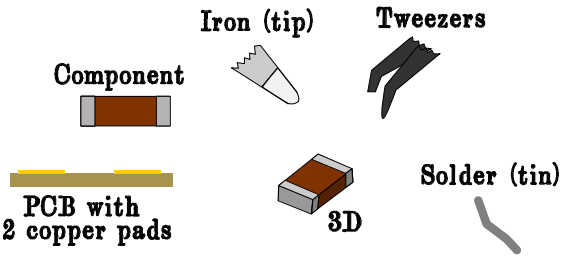


HOW TO SOLDER SMD (Surface Mount Device)

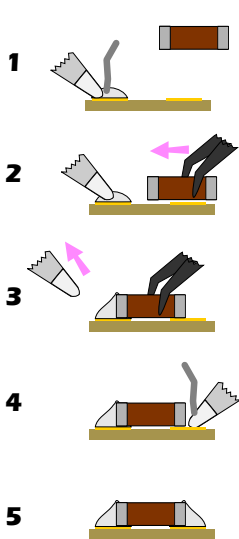


- 1. Put a drop solder on one of the empty pads. Always touch the copper with the tip. (u can leave the component on the side somewhere)
- 2. Grab the component with the tweezers, slide on the board towards the pad. While heating the solder. Check how the liquid solder melts and flows to the side of component
- 3. Still hold the component in place and remove the tip. Wait and see how the solder solidifies. Check position of component. You can always hold and heat this one side again to move until good. Check if the solder nicely covers the pad and the component.
- 4. Now the component already holds in place. Come to other side with tip. Heat the pad AND the side of component and add solder. Check that the liquid solder nicely flows over the pad and the side.
- 5. You are done! Great work soldering SMD component. Check by eye if everything looks ok. Fix stuff if needed.

peepsy_phycom

Rev: 2026-06-01 19:11:45




	Source d	Pla ced	References	Value	Footprint	Quantity
1	☐	☐	C1	C	C_1210_noGND	1
2	☐	☐	R1, R2	R	R_1206_noGND	2
3	☐	☐	D1	Signal	LED_PLCC_2835_Handsoldering	1
4	☐	☐	U1	ATTiny85-20SU	SOIC-8 Attiny85	1
5	☐	☐	Piezo	Speaker_Crystal	Buzzer_CUI_CPT-90195-SMT	1
6	☐	☐	REF**	logo_sgm	logo_sgm	1
7	☐	☐	J1, J2	Probe	PeepsyPad_noGND	2
8	☐	☐	J3	Conn_01x03_Pin	smd-3pin	1

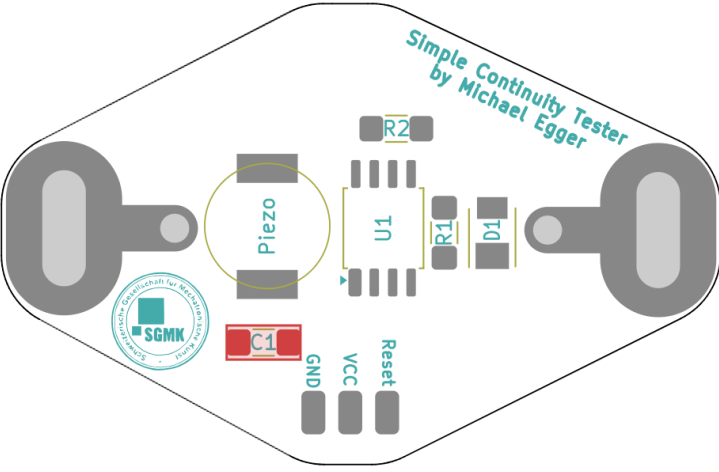

peepsy_phycom

Rev: 2026-06-01 19:11:45



	Source d	Pla ced	References	Value	Footprint	Quantity
1	☐	☐	C	C_0805_2012Metric	C_0805_2012Metric	1
2	☐	☐	R	R	R_1206_noGND	1
3	☐	☐	D	LED_0805_2012Metric	LED_0805_2012Metric	1
4	☐	☐	BT1	Battery_Cell	BatteryHolder_Keystone_1x2032	1
5	☐	☐	REF**	logo_sgm	logo_sgm	1
6	☐	☐	REF**	SOT-23 Handsoldering	SOT-23_Handsoldering	1
7	☐	☐	Ref**	Val**	Coconut_logo_sm	1
8	☐	☐	REF**	C_1206_3216Metric	C_1206_3216Metric	1

