


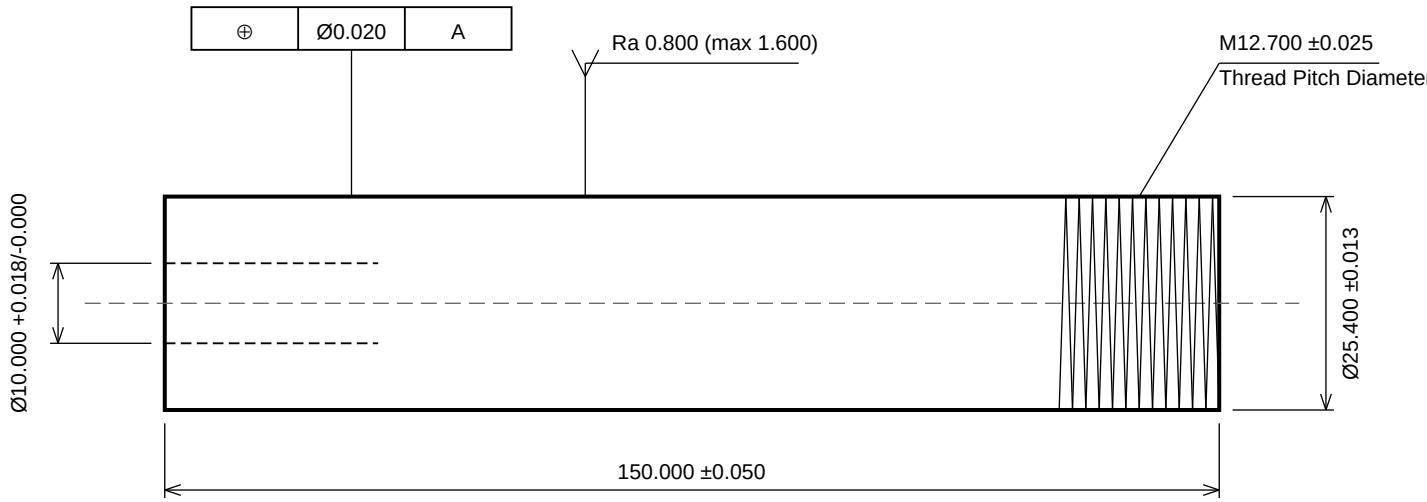

SIDE VIEW

DIMENSIONAL REQUIREMENTS (All dimensions in mm unless noted)

CHARACTERISTIC	NOMINAL	TOLERANCE	UNIT	GAUGE / TOOL
Outer Diameter	25.400	±0.013	mm	Outside Micrometer
Bore Diameter	10.000	+0.018/-0.000	mm	Bore Gauge
Overall Length	150.000	±0.050	mm	Height Gauge
Thread Pitch Dia.	12.700	±0.025	mm	Thread Gauge
Surface Finish Ra	0.800	max 1.600	µm	Profilometer

CRITICAL SPECIFICATIONS:

Outer Diameter: 25.400mm, Tolerance: ±0.013mm

Bore Diameter: 10.000mm, Tolerance: ±0.009mm

Overall Length: 150.000mm, Tolerance: ±0.050mm

Thread Pitch Diameter: 12.700mm, Tolerance: ±0.025mm

Break all sharp edges 0.2mm max

Surface finish Ra 0.800 µm (max 1.600 µm)

Surface finish Ra 0.800 µm (max 1.600 µm) on all machined surfaces.

Material: 4140 Steel, Heat Treated to HRC 28-32.

Critical tolerance on Outer Diameter: Ø25.400 ± 0.013mm

PRECISION SHAFT
ASSEMBLY

Drawn By: J. Smith

Checked By: M. Chen

Rev: A

Sheet: 1 of 1

Part No: PS-2024-001
Material: 4140 Steel, Heat Treated
Scale: NTS

Tolerances: Unless otherwise specified
Linear: ±0.050mm
Angular: ±0.5°
Surface: Ra 3.200 max

Date: 2024-11-15
Customer: Aerospace Dynamics Inc
Order: WO-2024-0847
All dims in mm