


Lagged inputs change the old-life error by under 0.1 %

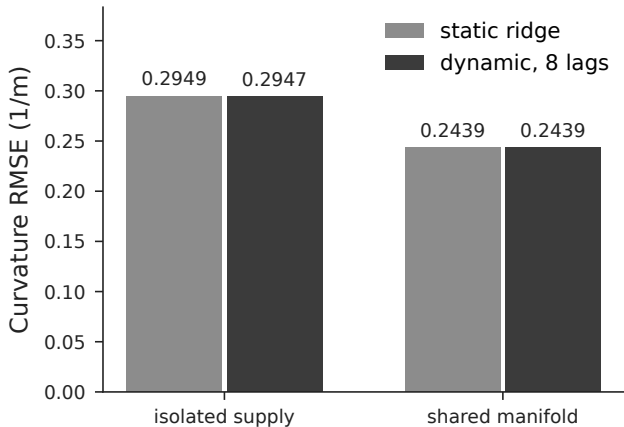

Simulation: Phase D cohort, 6 held-out actuators; correctors fitted on 0.1–0.5 of life and tested at 0.7 and 0.9; mean over actuators. Improvement: isolated 0.050 %, shared 0.001 %.