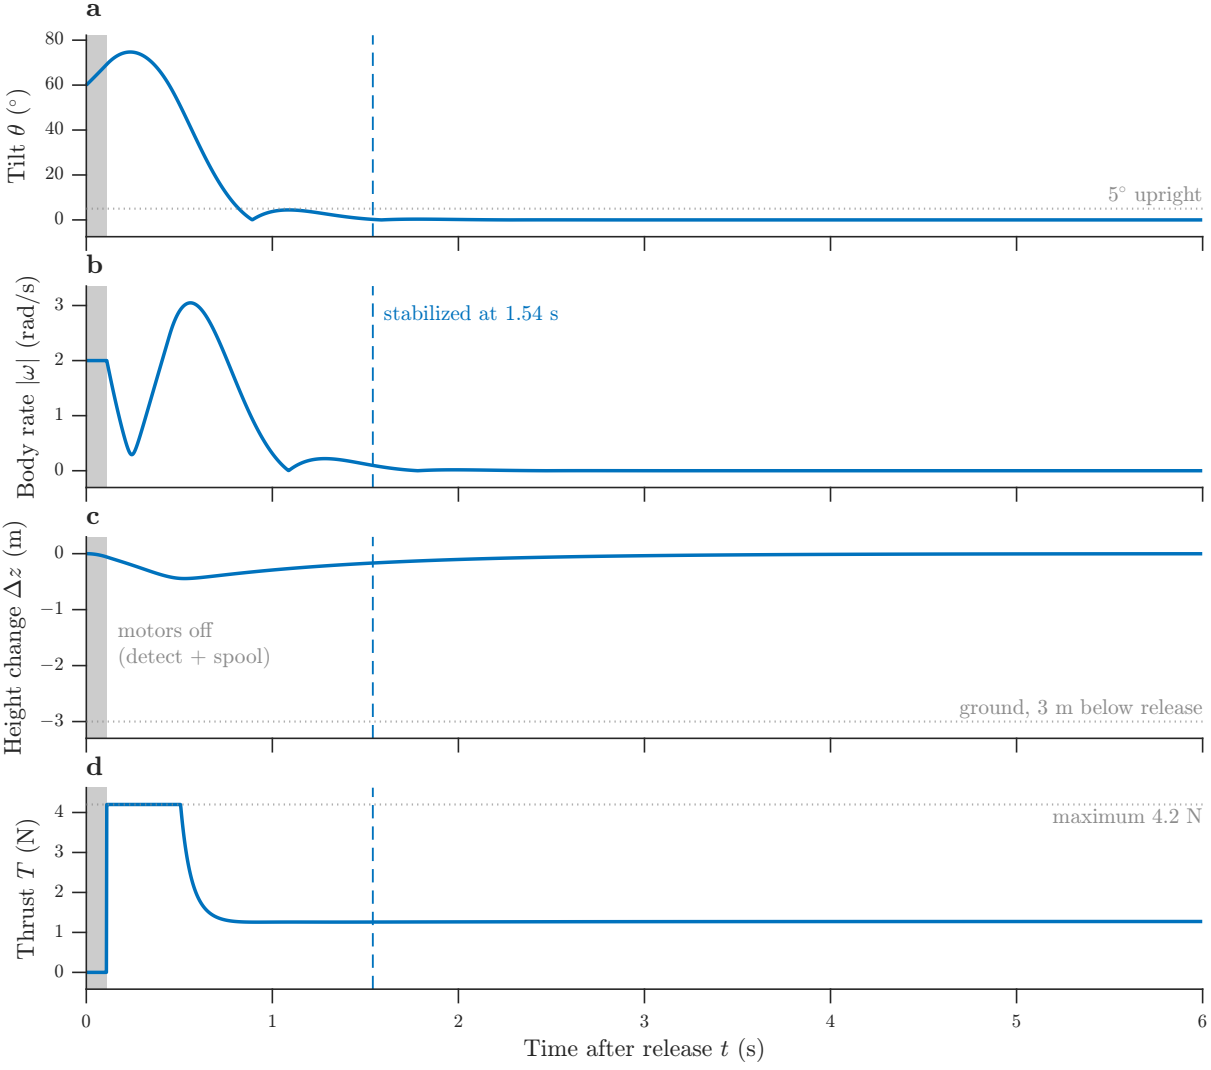

a
Tilt θ (°)
80
60
40
20
0
5° upright
b
Body rate |ω| (rad/s)
3
2
1
0
stabilized at 1.54 s
c
Height change Δz (m)
0
−1
−2
−3
motors off
(detect + spool)
ground, 3 m below release
d
Thrust T (N)
4
3
2
1
0
maximum 4.2 N
0
1
2
3
4
5
6
Time after release t (s)