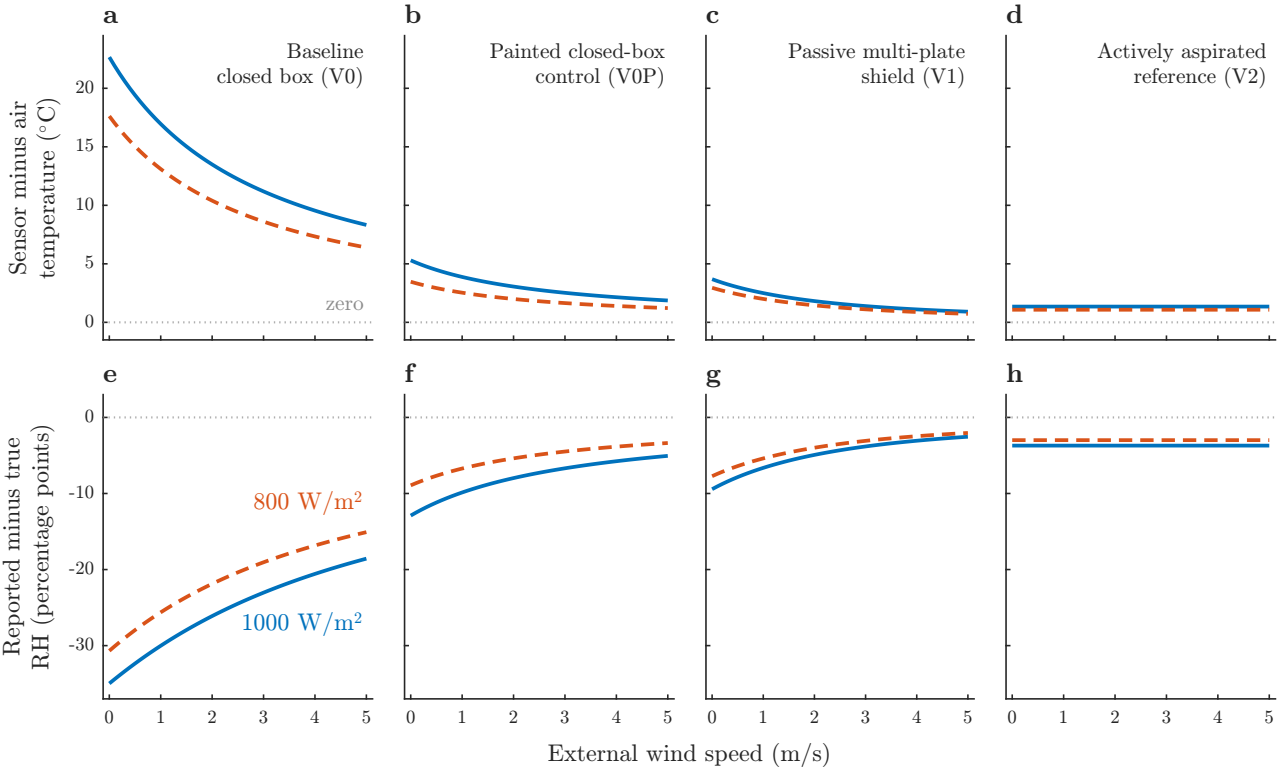
a
Baseline
closed box (V0)
b
Painted closed-box
control (V0P)
c
Passive multi-plate
shield (V1)
d
Actively aspirated
reference (V2)
Sensor minus air
temperature (°C)
20
15
10
5
0
zero
e
f
g
h
Reported minus true
RH (percentage points)
0
-10
-20
-30
800 W/m²
1000 W/m²
0
1
2
3
4
5
External wind speed (m/s)