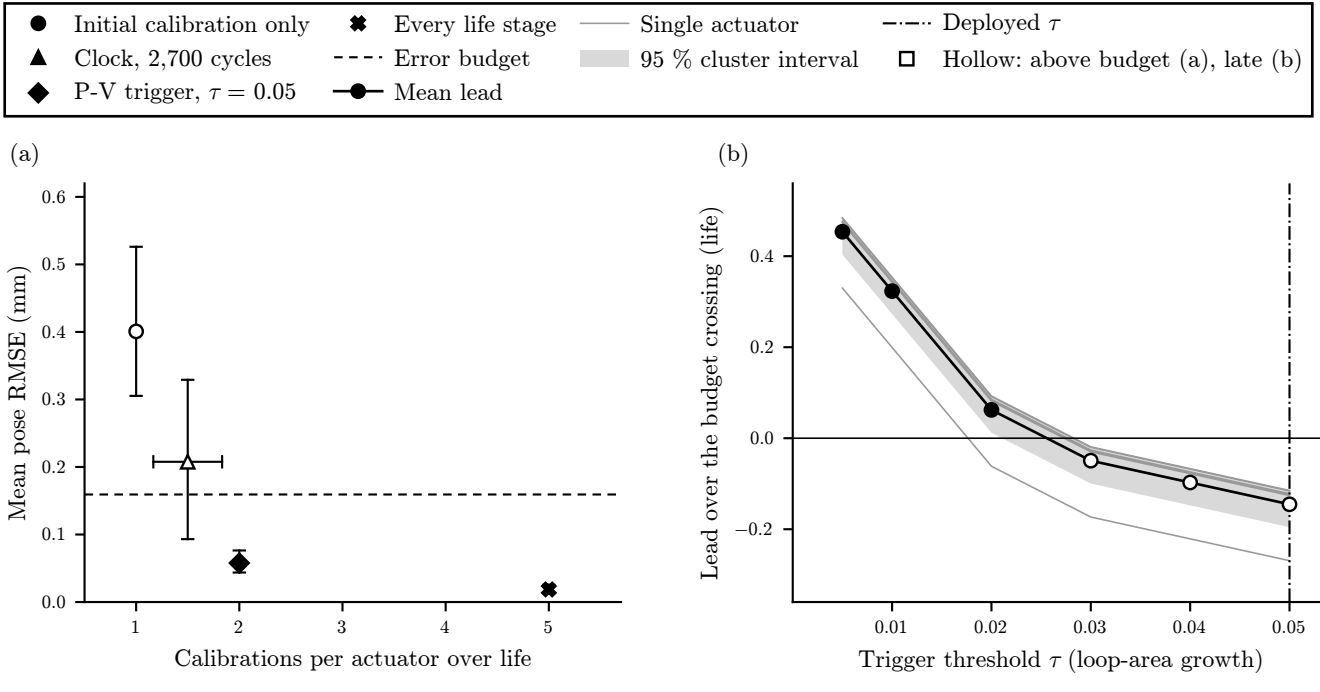
Initial calibration only
Clock, 2,700 cycles
P-V trigger, $\tau = 0.05$
Every life stage
Error budget
Mean lead
Single actuator
95 % cluster interval
Deployed τ
Hollow: above budget (a), late (b)
(a)
Mean pose RMSE (mm)
0.6
0.5
0.4
0.3
0.2
0.1
0.0
1
2
3
4
5
Calibrations per actuator over life
(b)
Lead over the budget crossing (life)
0.4
0.2
0.0
−0.2
0.01
0.02
0.03
0.04
0.05
Trigger threshold τ (loop-area growth)