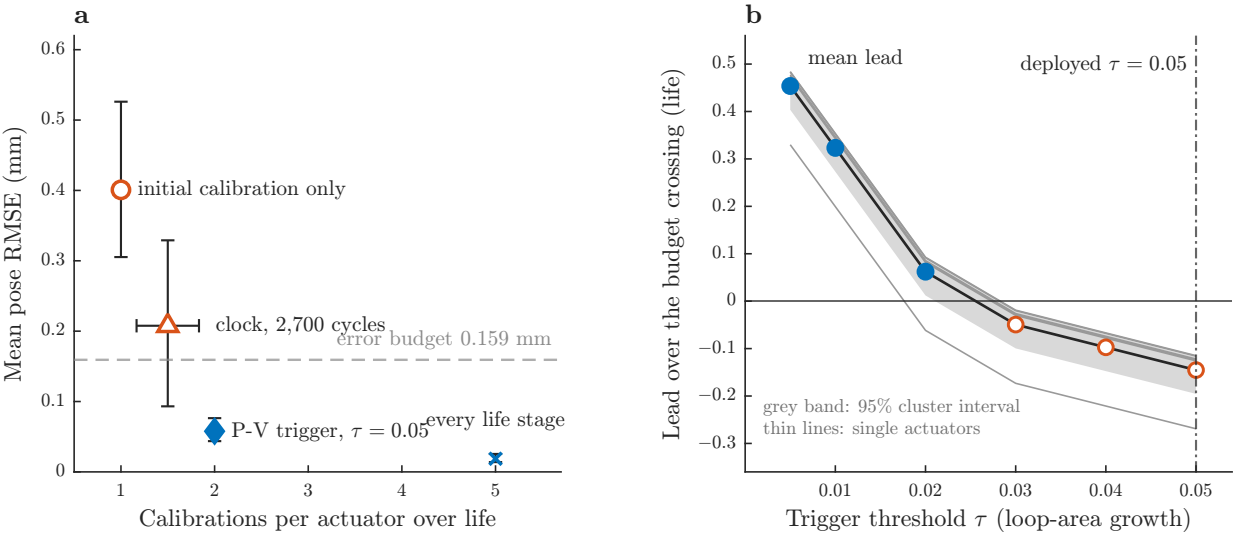
a
Mean pose RMSE (mm)
0.6
0.5
0.4
0.3
0.2
0.1
0
initial calibration only
clock, 2,700 cycles
error budget 0.159 mm
P-V trigger, $\tau = 0.05$
every life stage
1
2
3
4
5
Calibrations per actuator over life
b
Lead over the budget crossing (life)
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
mean lead
deployed $\tau = 0.05$
grey band: 95% cluster interval
thin lines: single actuators
0.01
0.02
0.03
0.04
0.05
Trigger threshold τ (loop-area growth)