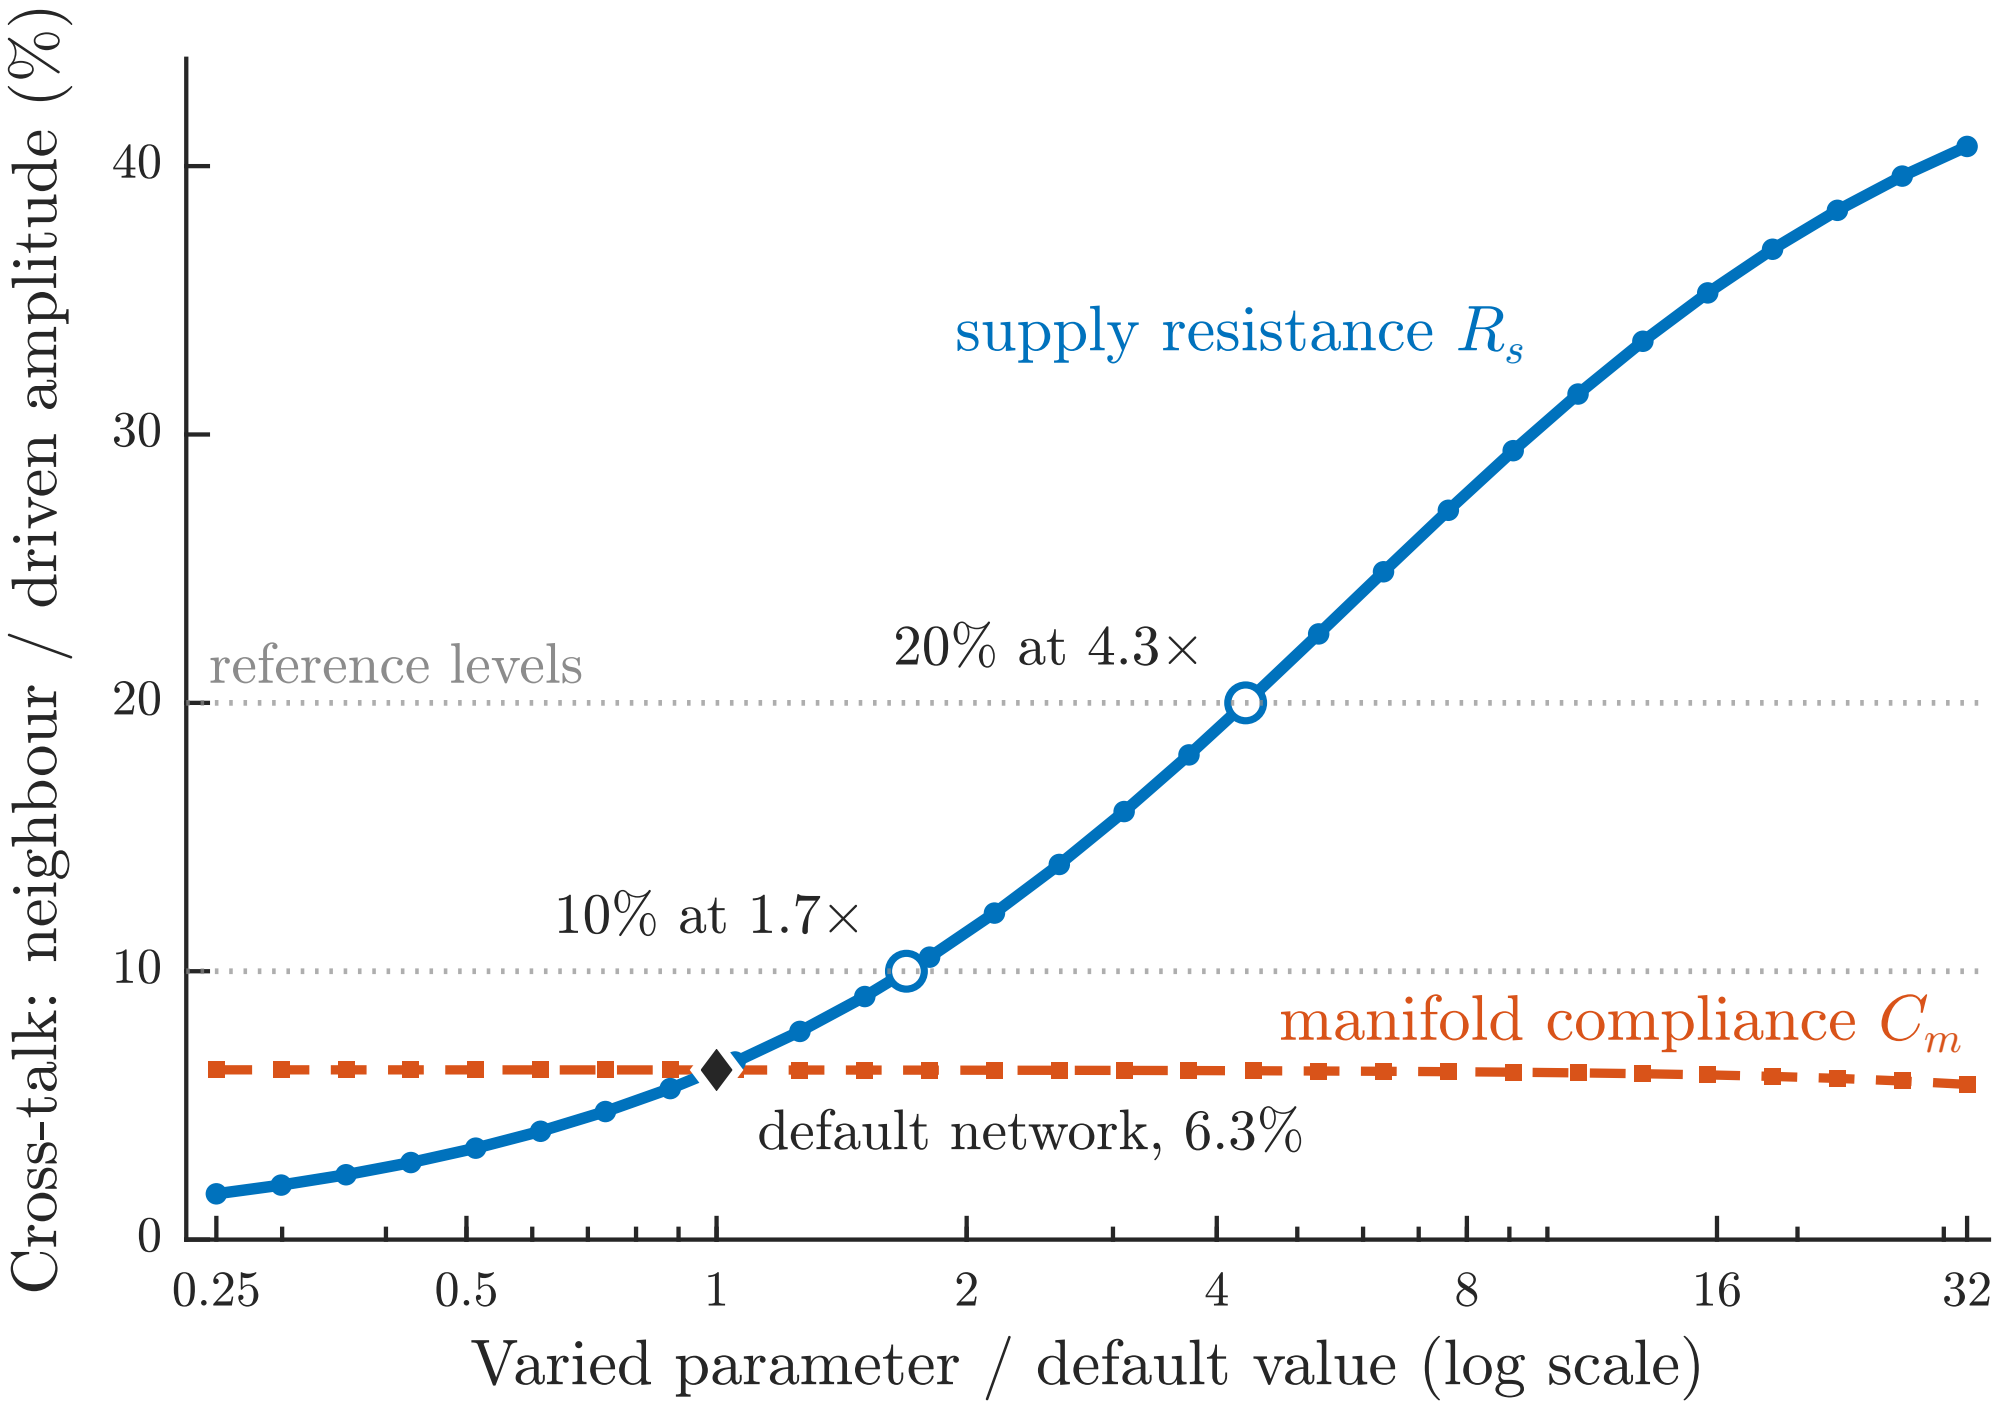
Cross-talk: neighbour / driven amplitude (%)
0
10
20
30
40
reference levels
supply resistance R_s
20% at 4.3×
10% at 1.7×
manifold compliance C_m
default network, 6.3%
0.25
0.5
1
2
4
8
16
32
Varied parameter / default value (log scale)