CSI camera preview

CSI camera preview
1. Enable the CSI camera
    1.1. Configure the pins
2. View the video devices
3. Preview the camera image
    3.1. Specify the camera
    3.2. Specify the preview resolution


1. Enable the CSI camera

If the CSI camera is installed but no `/dev/video*` device appears, you can enable the CSI camera pins as follows.


1.1. Configure the pins

Enter the following command in the terminal:


```
sudo /opt/nvidia/jetson-io/jetson-io.py
```

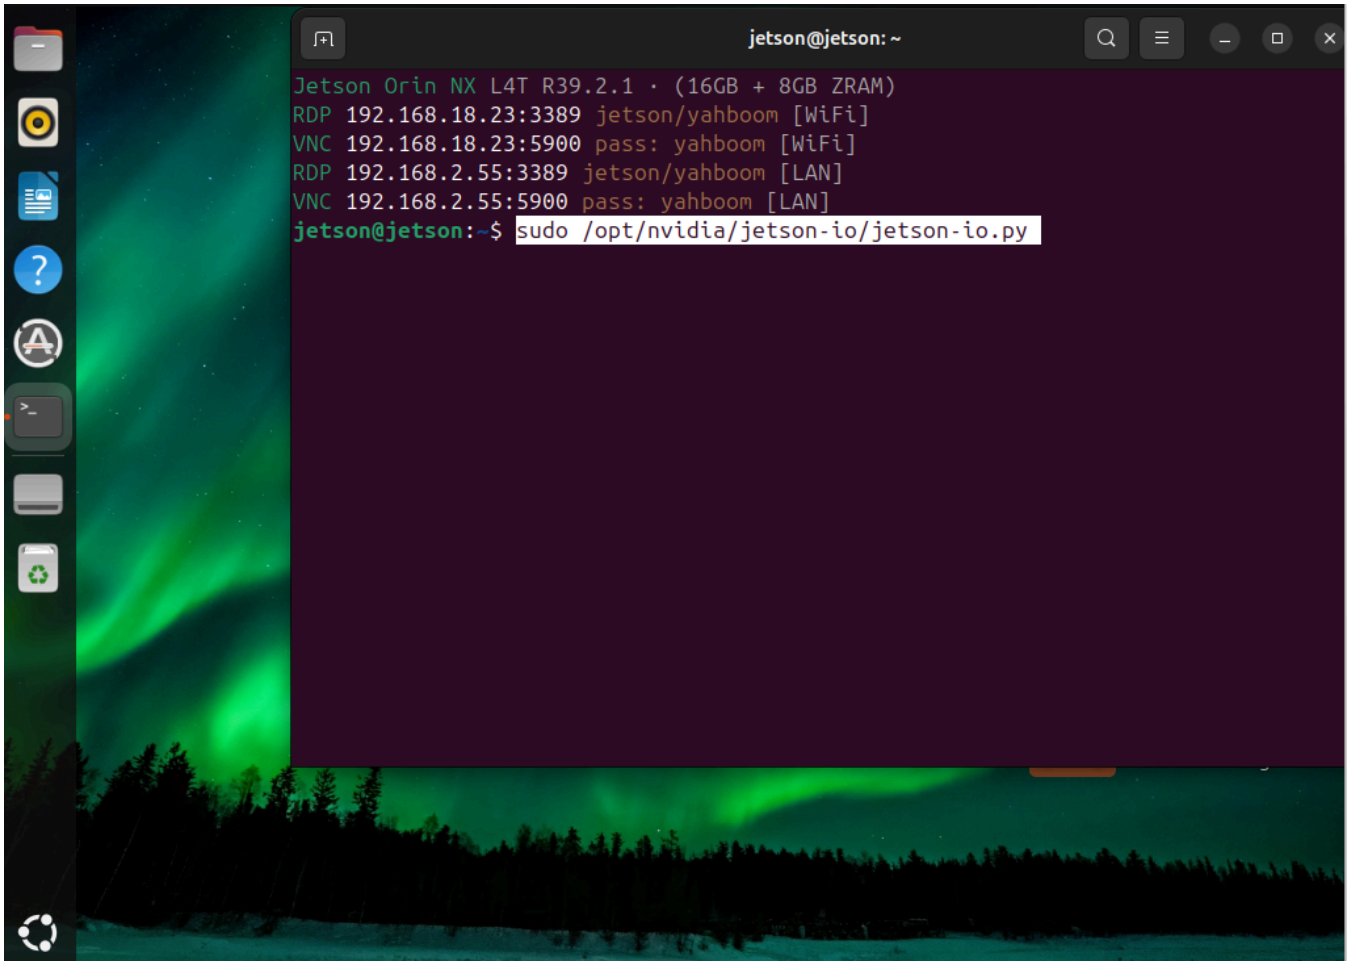


Use the arrow keys to select `Configure Jetson 22pin CSI Connector`, then press `Enter` to enter the configuration:

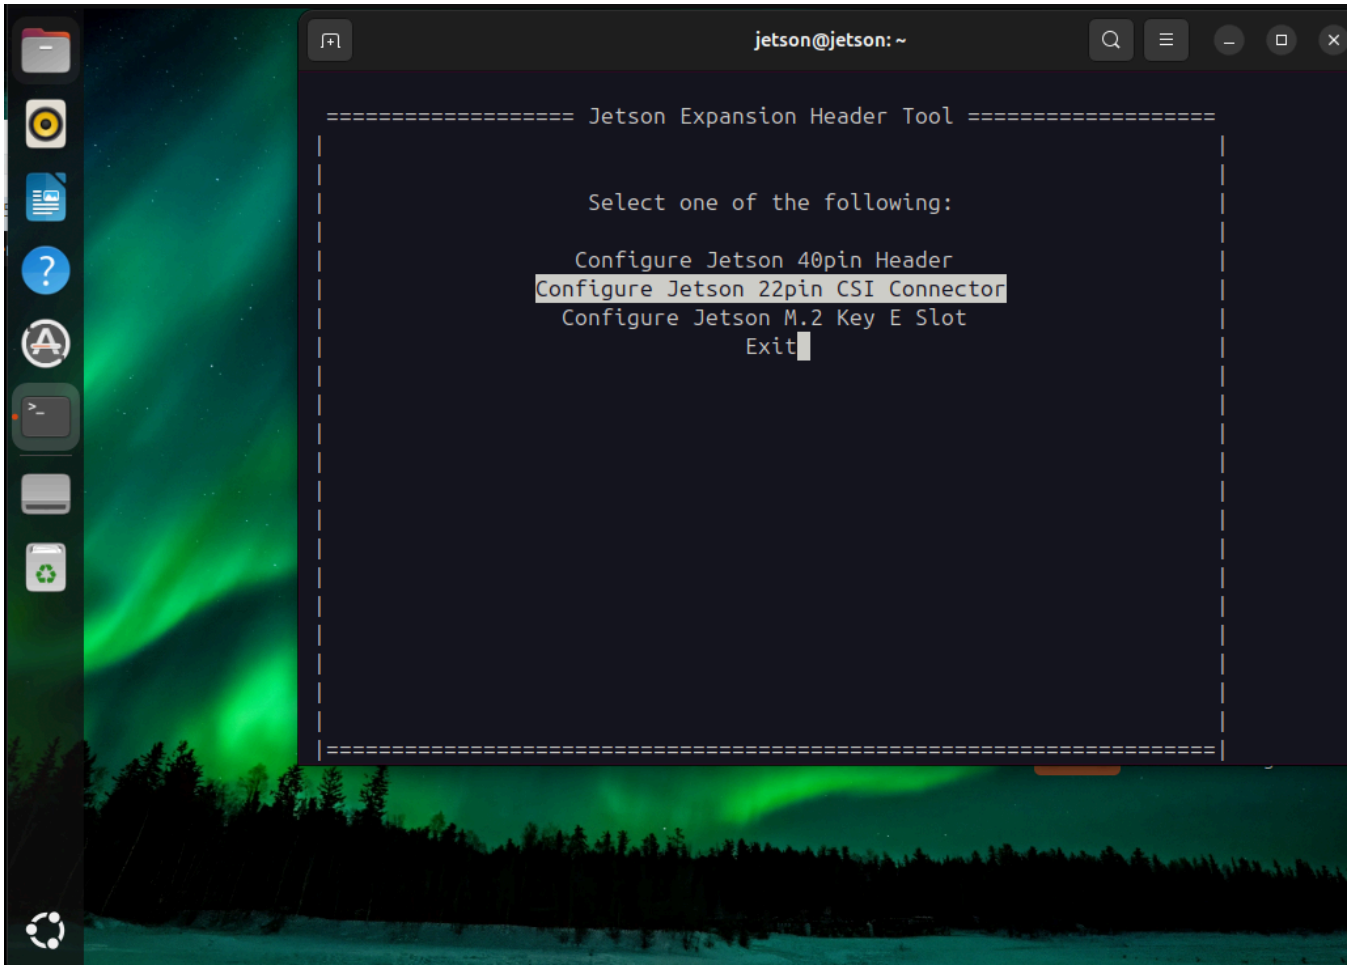


Select `Configure for compatible hardware`, then press `Enter` to enter the configuration:

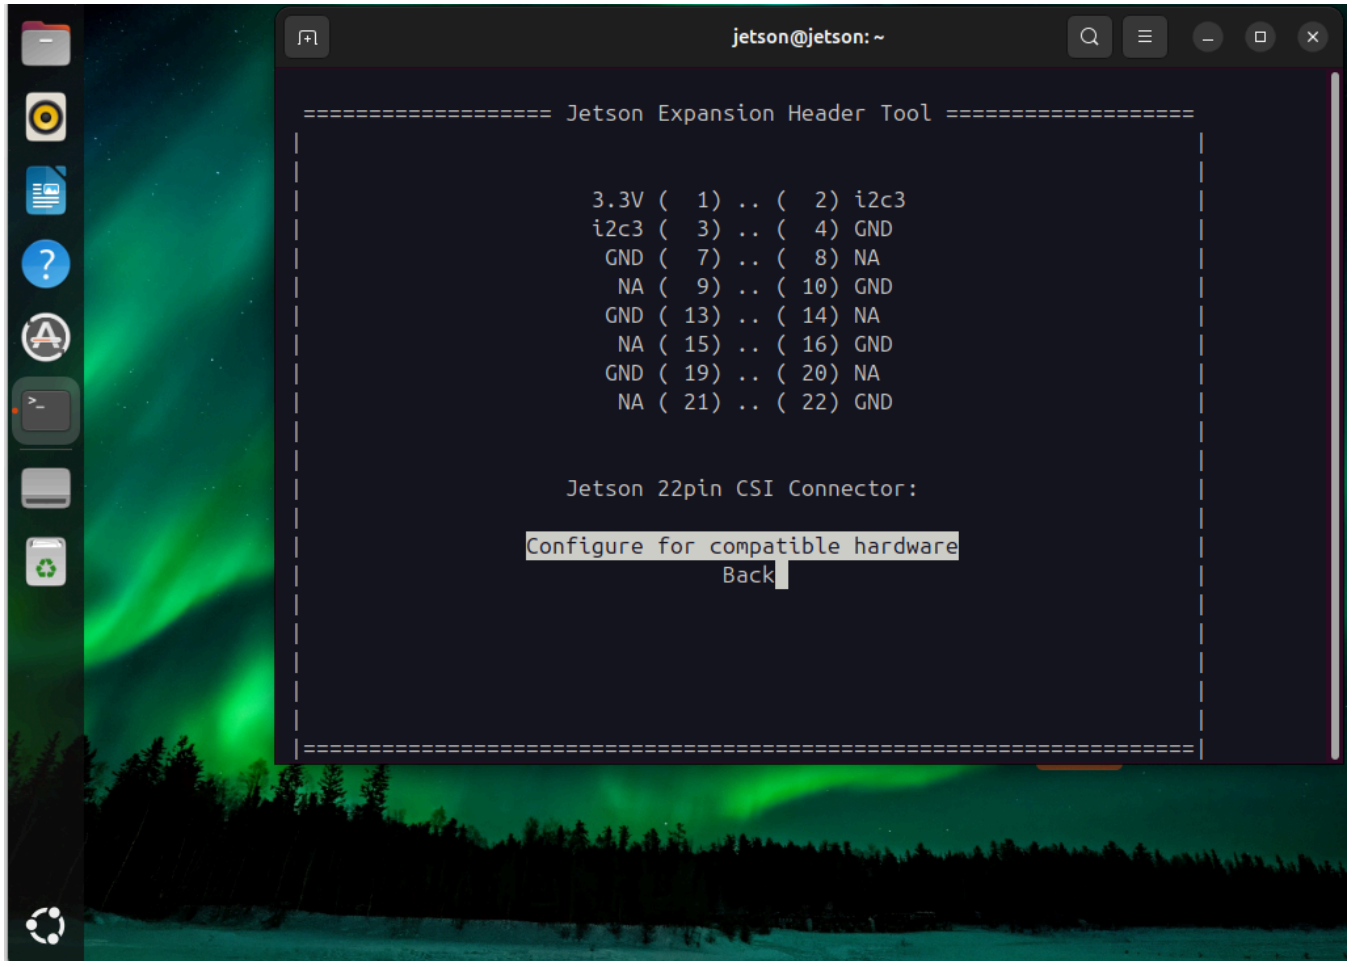


Select `Camera IMX219 Dual`, then press `Enter` to enter the configuration:

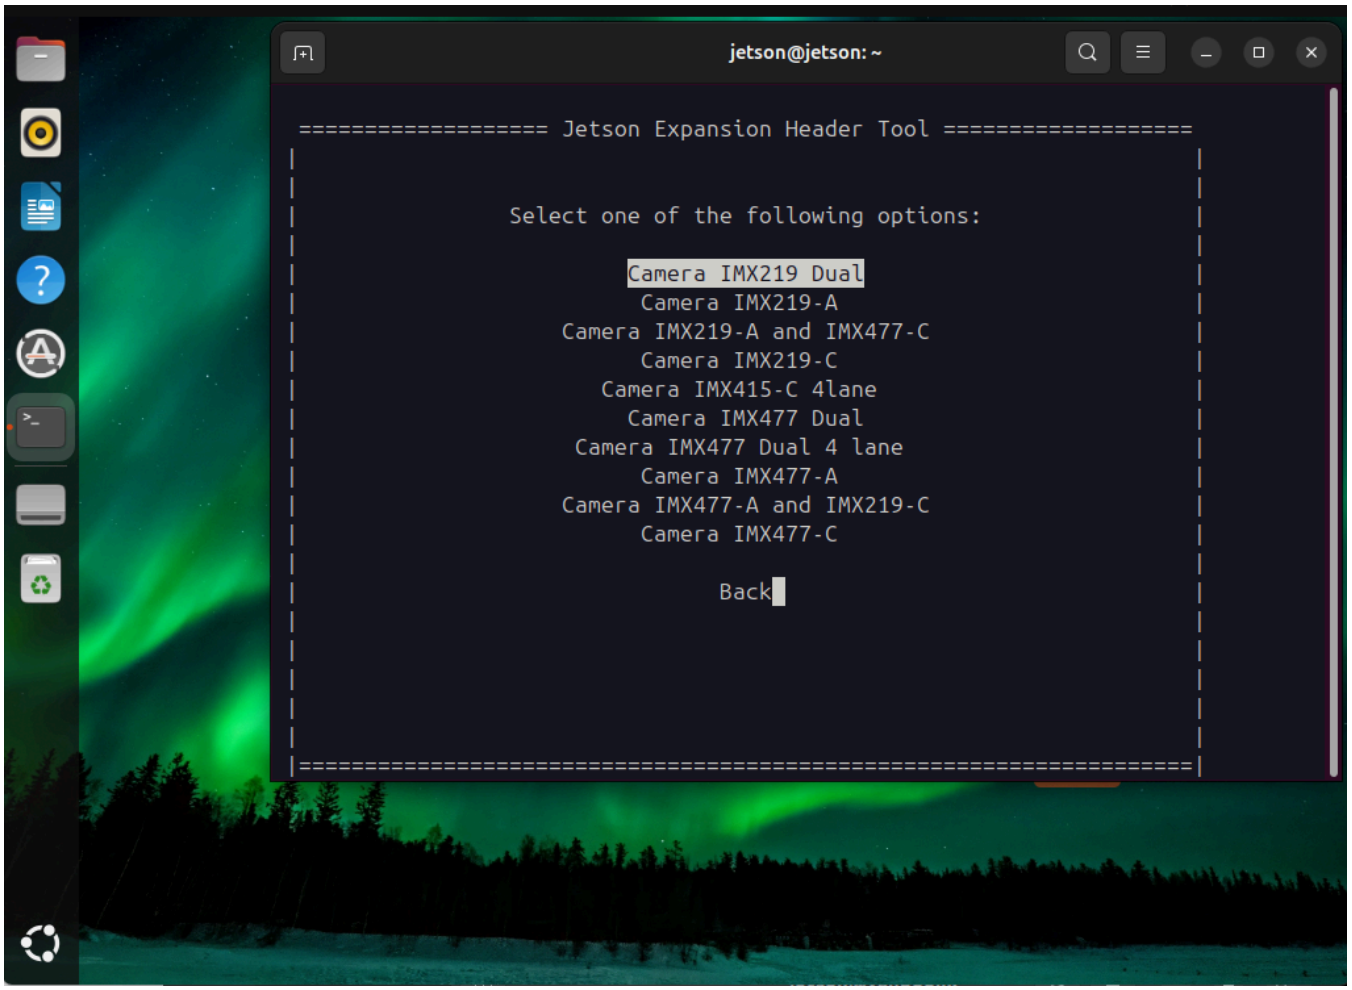

Select `Save pin changes`, then press `Enter` to enter the configuration:

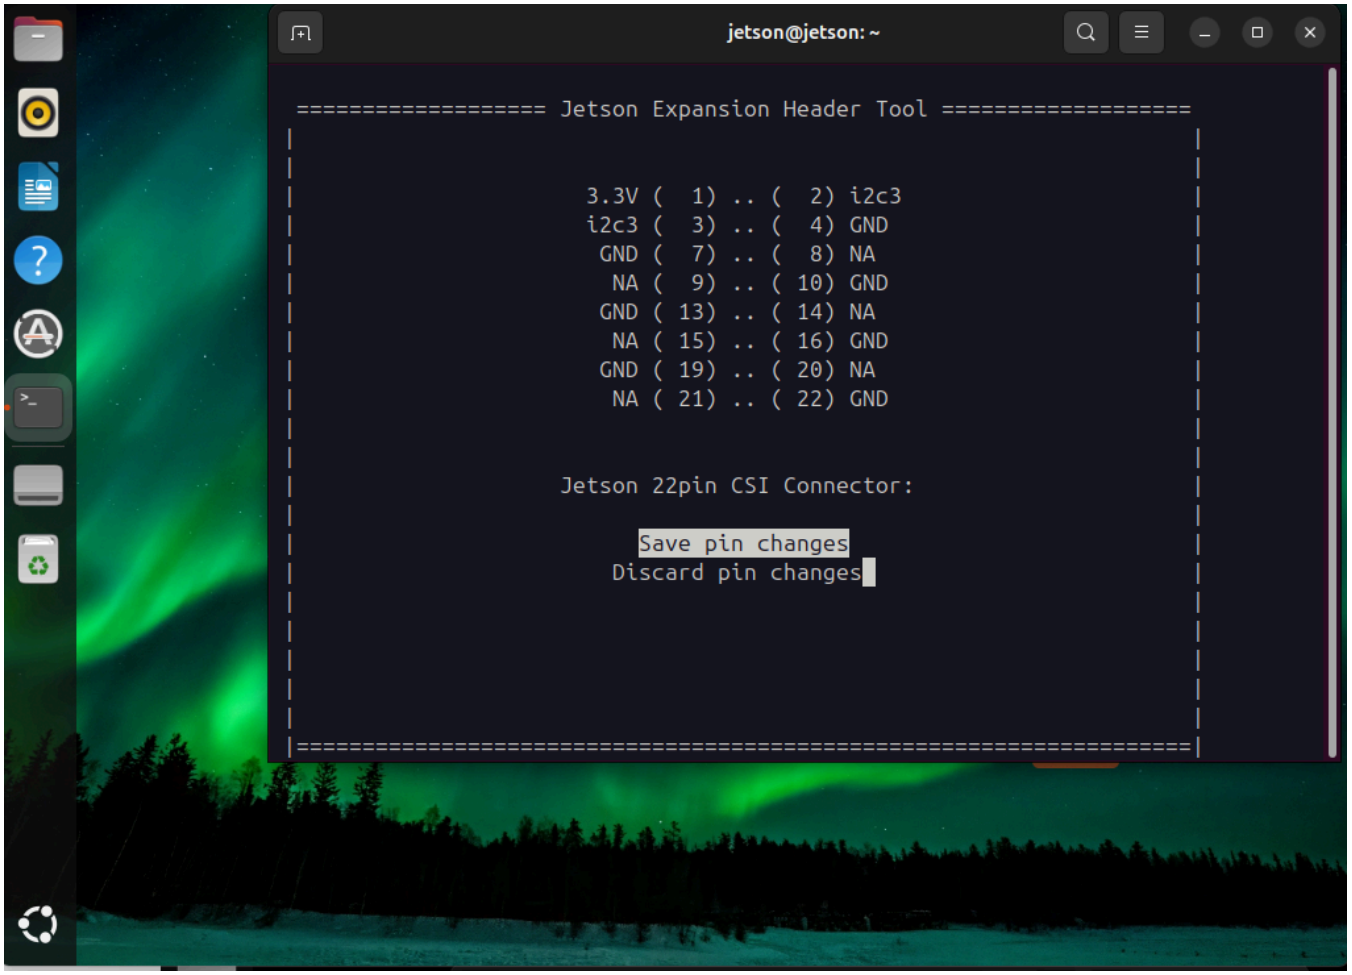


Select `Save and reboot to reconfigure pins`, then wait for the system to reboot:

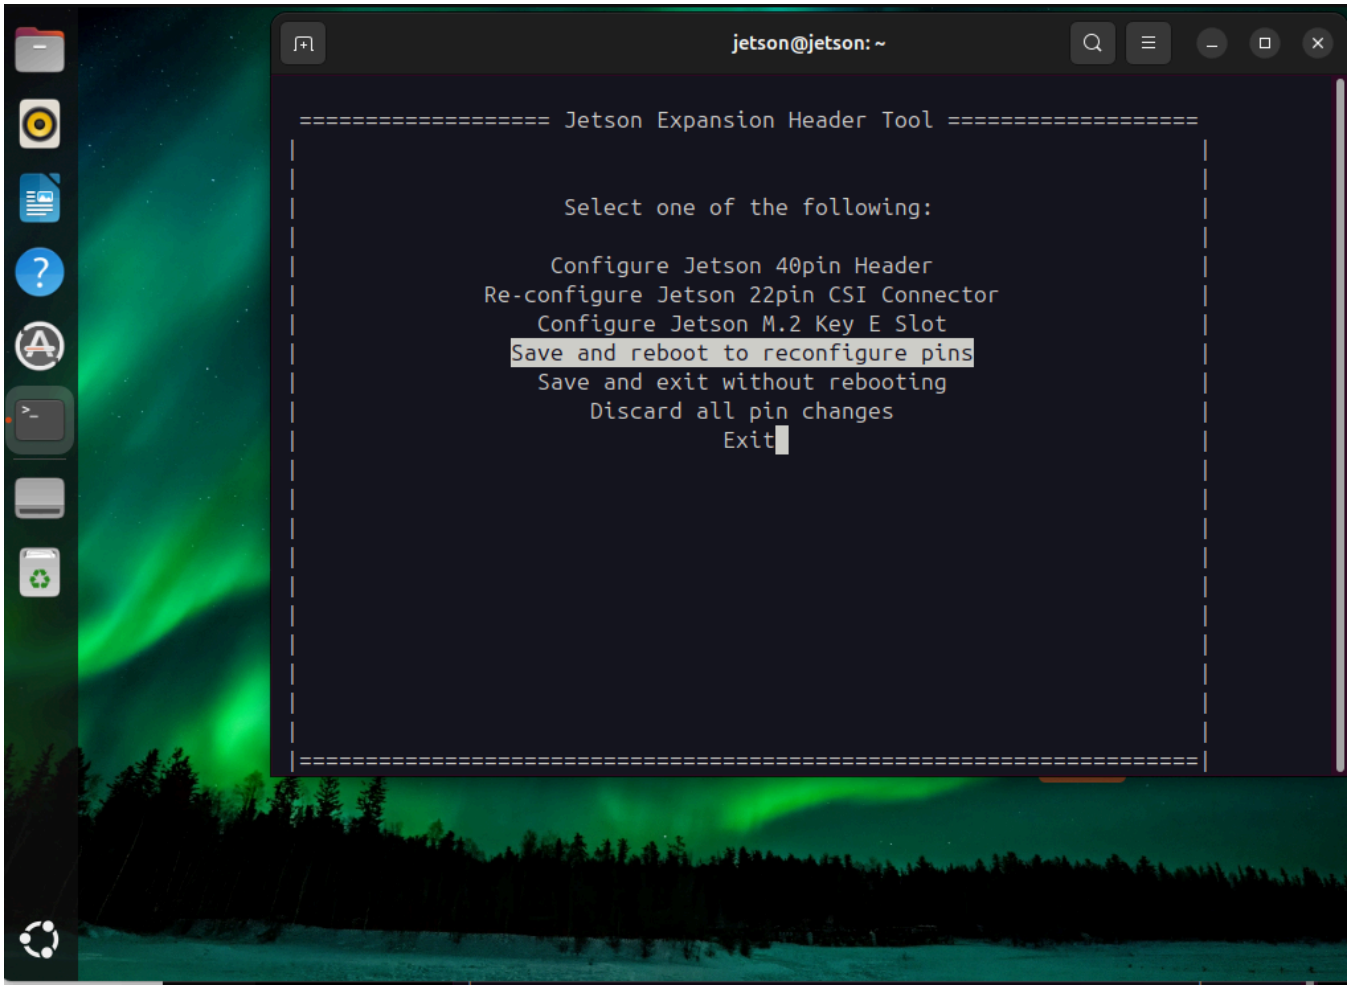

2. View the video devices

```
ls /dev/video*
```


The result shown in the image is the result of connecting two CSI cameras: generally one CSI camera shows one `video` device.

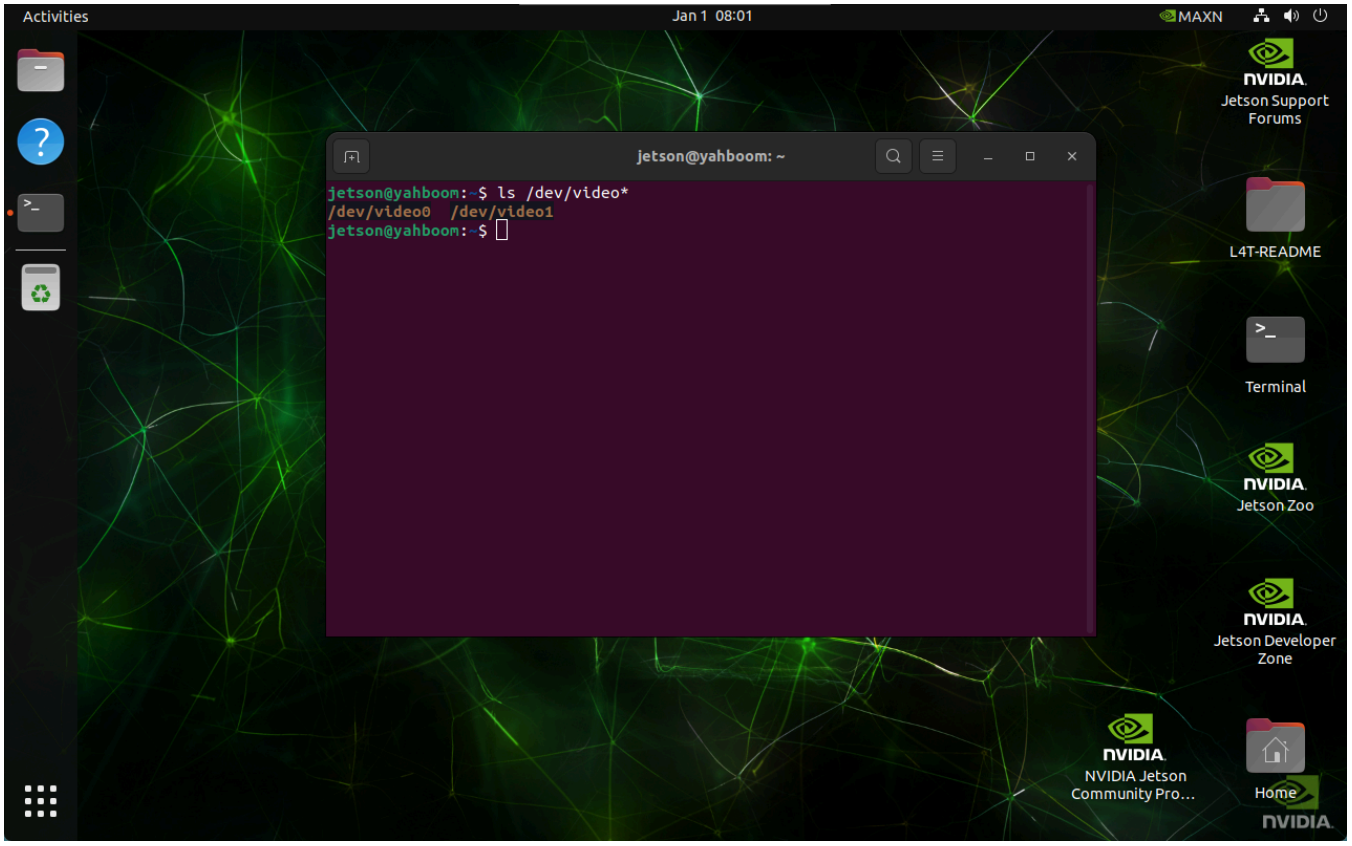

3. Preview the camera image

Enter the following command in the terminal, and the camera preview window pops up automatically: by default the `/dev/video0` device is opened.

```
nvgstcapture-1.0
```

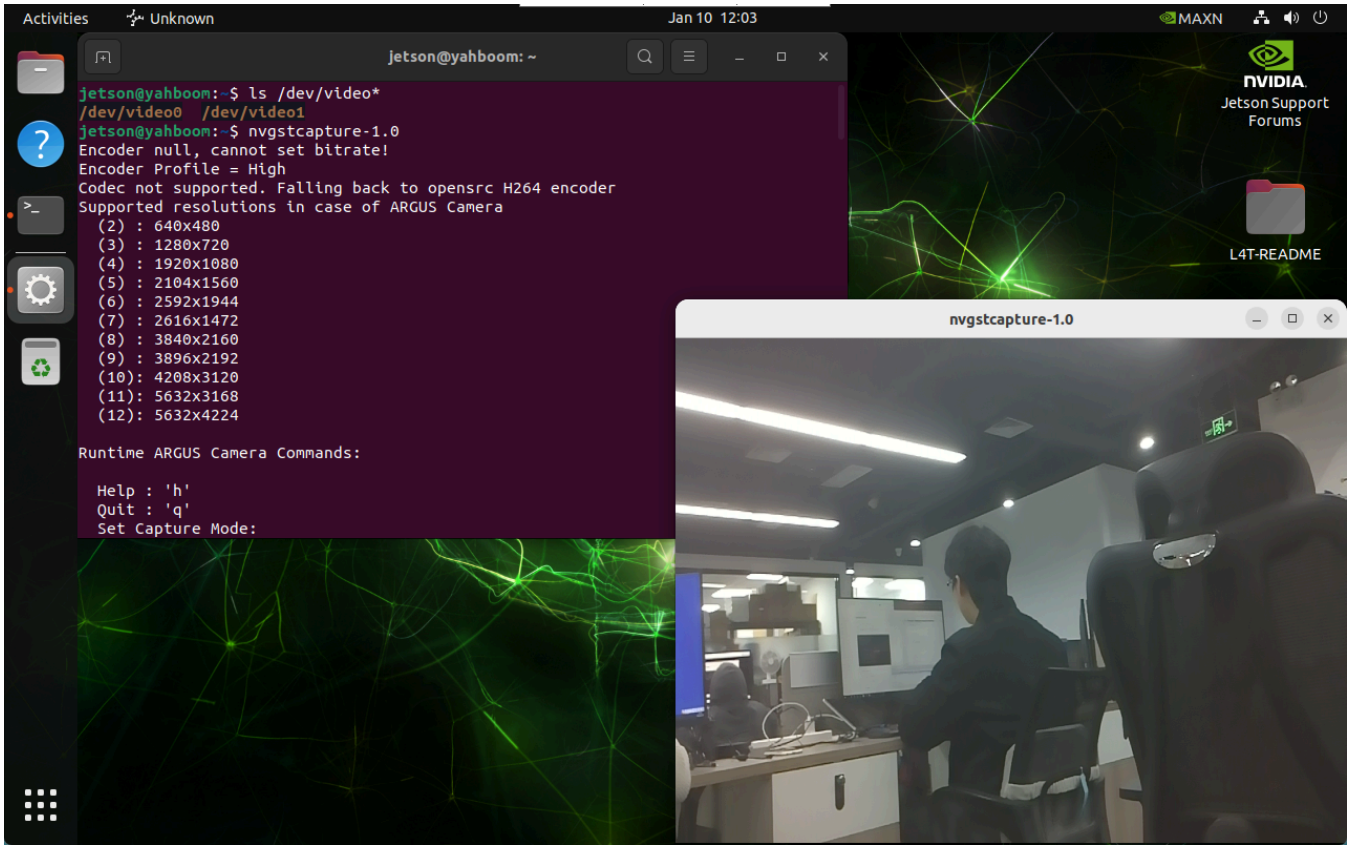


If the preview image looks a bit red, add the parameter to adjust the white balance:

```
nvgstcapture-1.0 --whitebalance=3
```

3.1. Specify the camera

If there are multiple cameras, you can specify the camera ID:


```
nvgstcapture-1.0 --sensor-id=1
```

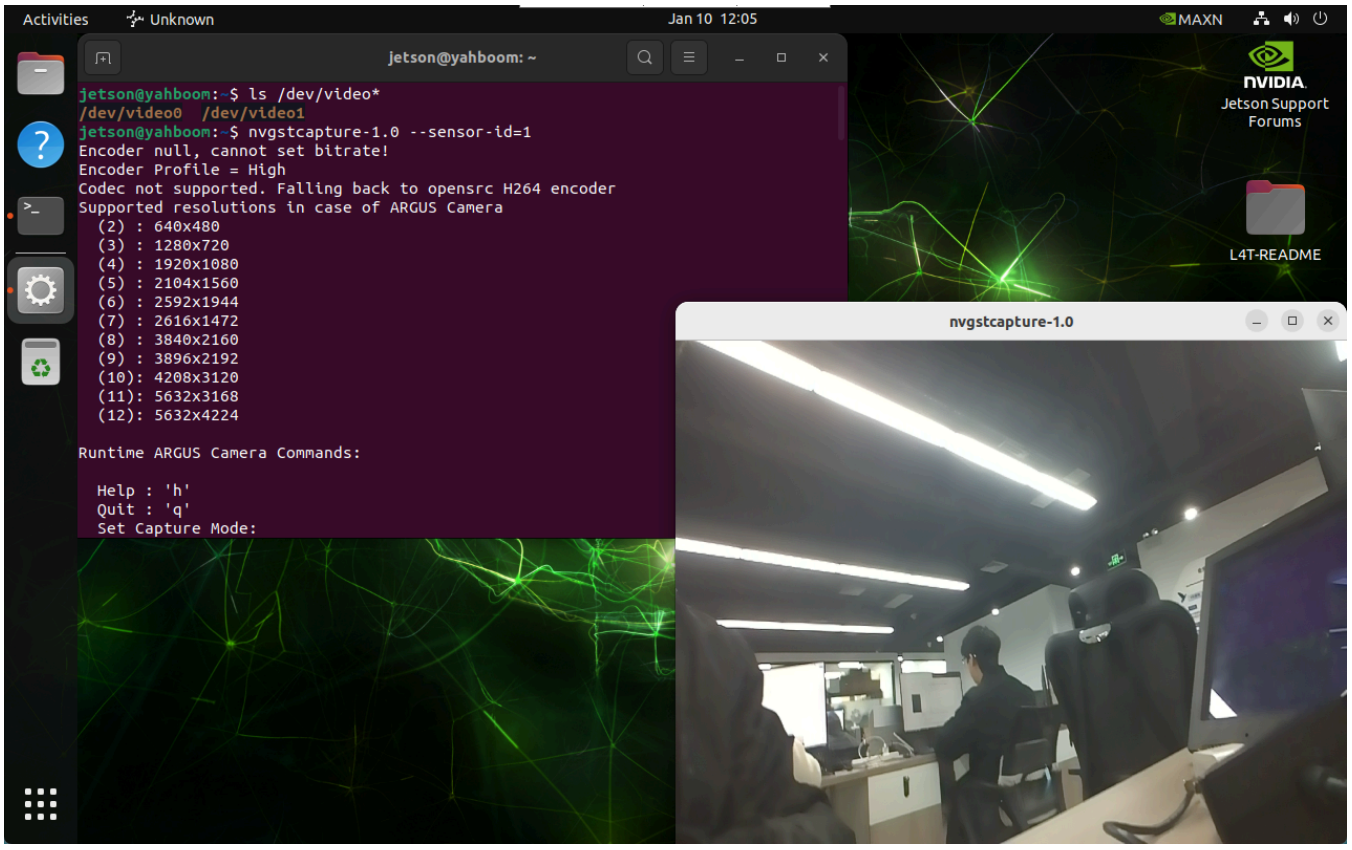

3.2. Specify the preview resolution

If there is only one CSI camera, change `--sensor-id=1` to `--sensor-id=0`:

```
nvgstcapture-1.0 --sensor-id=1 --cus-prev-res=1280x720
```

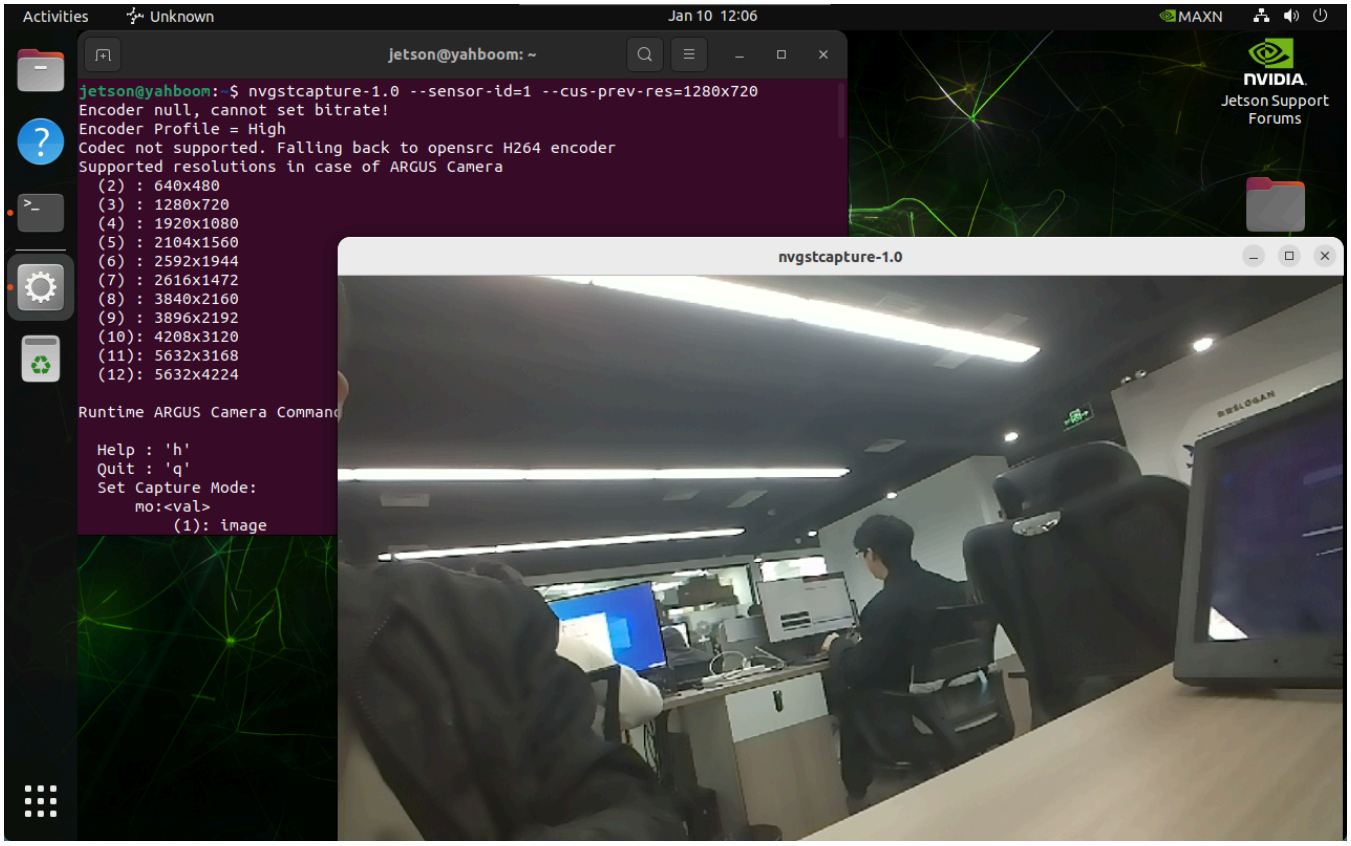
Activities
Unknown
Jan 10 12:06
MAXN
jetson@yahboom: ~
jetson@yahboom:~$ nvgstcapture-1.0 --sensor-id=1 --cus-prev-res=1280x720
Encoder null, cannot set bitrate!
Encoder Profile = High
Codec not supported. Falling back to opensrc H264 encoder
Supported resolutions in case of ARGUS Camera
(2) : 640x480
(3) : 1280x720
(4) : 1920x1080
(5) : 2104x1560
(6) : 2592x1944
(7) : 2616x1472
(8) : 3840x2160
(9) : 3896x2192
(10): 4208x3120
(11): 5632x3168
(12): 5632x4224
Runtime ARGUS Camera Comman
Help : 'h'
Quit : 'q'
Set Capture Mode:
mo:<val>
(1): image
NVIDIA
Jetson Support
Forums
nvgstcapture-1.0