




Full Network

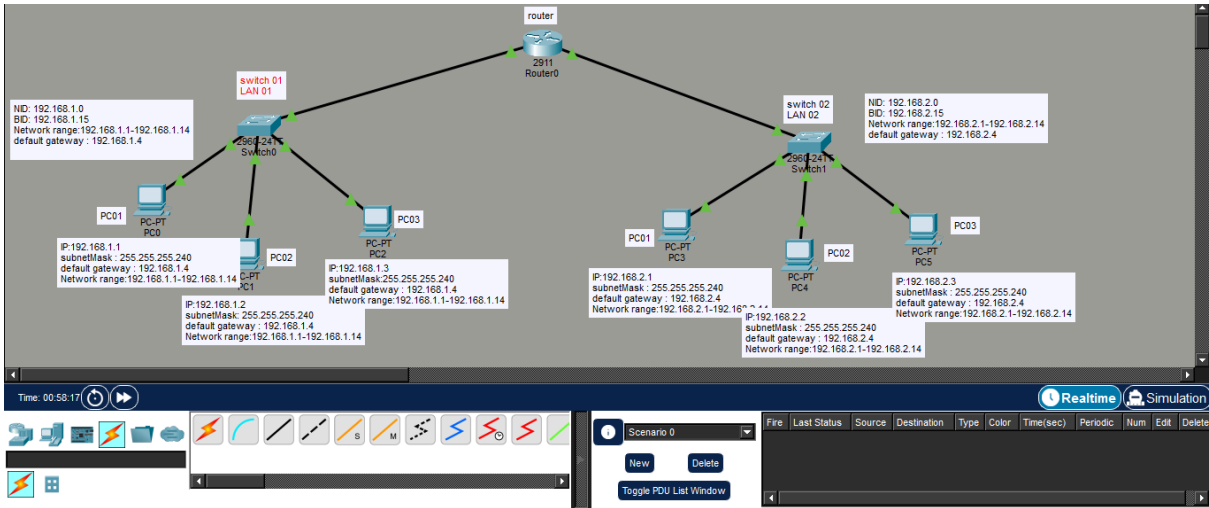

LAN 01

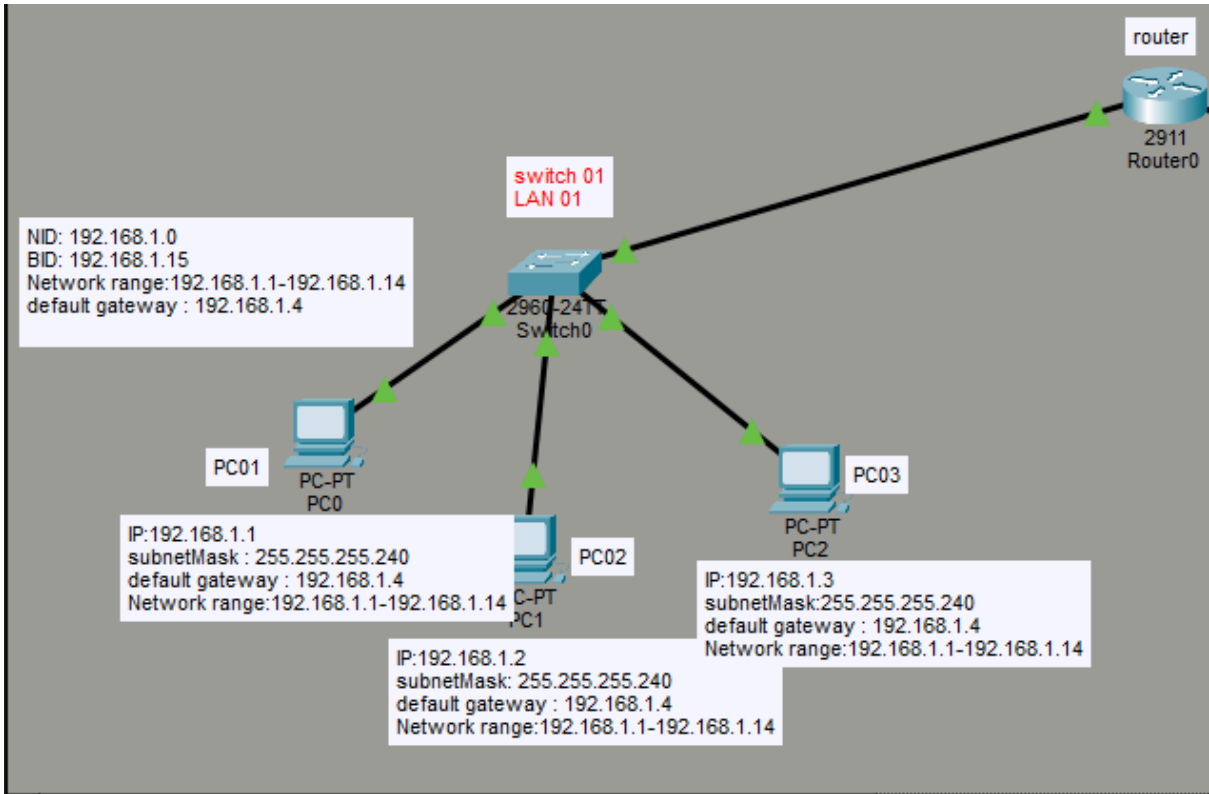

LAN 02

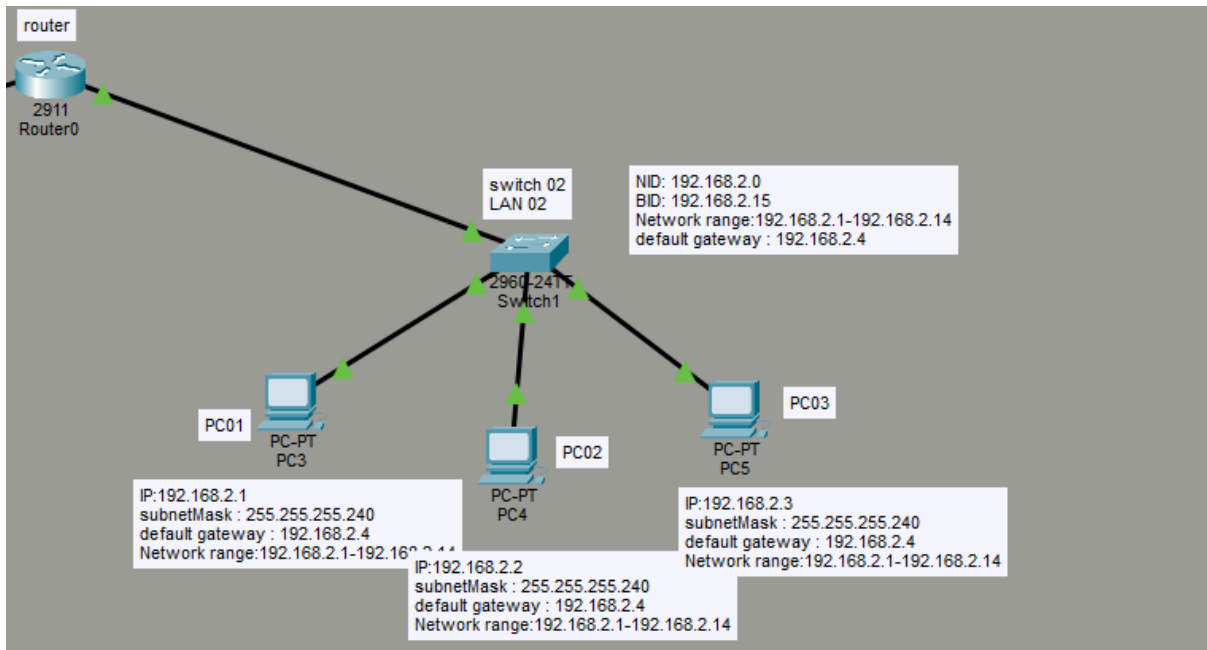

Router LAN 02 adding gateway

Physical Config CLI Attributes

GLOBAL

- Settings
- Algorithm Settings
- ROUTING
- Static
- RIP
- SWITCHING
- VLAN Database
- INTERFACE
- GigabitEthernet0/0
- GigabitEthernet0/1
- GigabitEthernet0/2

GigabitEthernet0/1

Port Status

Link Speed

Duplex

MAC Address

IP Configuration

IPv4 Address

Subnet Mask

Tx Ring Limit

Press RETURN to get started!

```

Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/1
Router(config-if)#
  
```

Top

Router LAN01 assign gateway

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0

GigabitEthernet0/1

GigabitEthernet0/2

GigabitEthernet0/0

Port Status

Link Speed

Duplex

MAC Address

IP Configuration

Pv4 Address

Subnet Mask

Tx Ring Limit

1000 Mbps 100 Mbps 10 Mbps On

Half Duplex Full Duplex Auto

0002.17CB.1C01

192.168.1.4

255.255.255.240

10

Press RETURN to get started!

```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#
```

Top

PCs IP configuration

Physical Config Desktop Programming Attributes

Configuration

Interface FastEthernet0

IP Configuration

DHCP Static

Pv4 Address

Subnet Mask

Default Gateway

DNS Server

192.168.1.1

255.255.255.240

192.168.1.4

0.0.0.0

Pv6 Configuration

Automatic Static

Pv6 Address

Link Local Address

Default Gateway

DNS Server

FE80::20C:85FF:FE1E:41B4

802.1X

Use 802.1X Security

Authentication

Username

Password

MD5

Top

Physical

Config

Desktop

Programming

Attributes

Configuration

X

InterfaceFastEthernet0

IP Configuration

DHCP

Static

IPv4 Address

192.168.1.2

Subnet Mask

255.255.255.240

Default Gateway

192.168.1.4

DNS Server

0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address

Link Local Address

FE80::2E0:B0FF:FE6E:7806

Default Gateway

DNS Server

802.1X

Use 802.1X Security

Authentication

MD5

Username

Password

Top

Physical

Config

Desktop

Programming

Attributes

Configuration

X

InterfaceFastEthernet0

IP Configuration

DHCP

Static

IPv4 Address

192.168.1.3

Subnet Mask

255.255.255.240

Default Gateway

192.168.1.4

DNS Server

0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address

Link Local Address

FE80::202:4AFF:FE54:939A

Default Gateway

DNS Server

802.1X

Use 802.1X Security

Authentication

MD5

Username

Password

Top

LAN 02 pc IP configuration

Physical Config Desktop Programming Attributes

IP Configuration [X]

Interface: FastEthernet0

IP Configuration

☒ DHCP ☒ Static

IPv4 Address: 192.168.2.1

Subnet Mask: 255.255.255.240

Default Gateway: 192.168.2.4

DNS Server: 0.0.0.0

IPv6 Configuration

☒ Automatic ☒ Static

IPv6 Address: /

Link Local Address: FE80::290:21FF:FE00:D402

Default Gateway:

DNS Server:

802.1X

☒ Use 802.1X Security

Authentication: MD5

Username:

Password:

Top

IP Configuration [X]

Interface: FastEthernet0

IP Configuration

☒ DHCP ☒ Static

IPv4 Address: 192.168.2.2

Subnet Mask: 255.255.255.240

Default Gateway: 192.168.2.4

DNS Server: 0.0.0.0

IPv6 Configuration

☒ Automatic ☒ Static

IPv6 Address: /

Link Local Address: FE80::20B:BEFF:FE05:95C9

Default Gateway:

DNS Server:

802.1X


☒ Use 802.1X Security

Authentication: MD5

Username:

Password:

Top

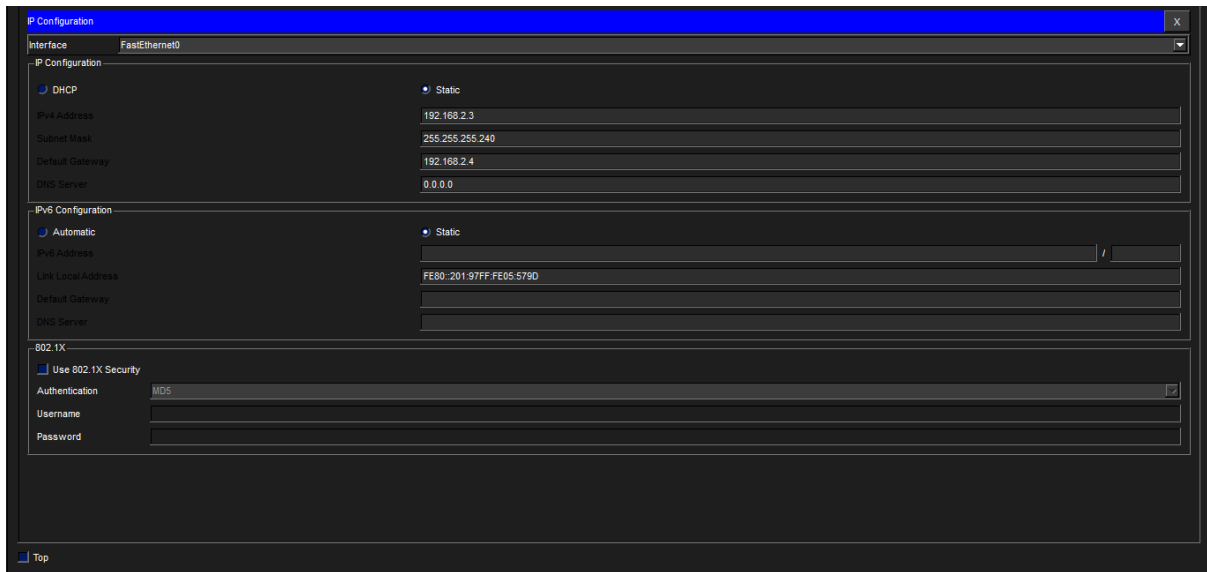

PING LAN01 pc01 - pc 03

```
C:\>
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

PING LAN02 pc01 - pc03

```
C:\>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:

Reply from 192.168.2.3: bytes=32 time<1ms TTL=128
Reply from 192.168.2.3: bytes=32 time<1ms TTL=128
Reply from 192.168.2.3: bytes=32 time<1ms TTL=128
Reply from 192.168.2.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

PING LAN01 pc 01 - PING LAN02 pc 03

```
C:\>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.3: bytes=32 time=15ms TTL=127
Reply from 192.168.2.3: bytes=32 time=10ms TTL=127
Reply from 192.168.2.3: bytes=32 time=13ms TTL=127

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 10ms, Maximum = 15ms, Average = 12ms

C:\>
```