15-213 Recitation Caches and C Review

Your TAs Monday, Feb 20th, 2023

Attack Lab Conclusion

- If you enjoyed this lab:
- Consider <u>15-330</u> Introduction to Computer Security
- Consider joining the hacking team at CMU PPP
- Don't use functions vulnerable to buffer overflow (like gets)
 - Use functions that allow you to specify buffer lengths:
 - fgets instead of gets
 - strncpy instead of strcpy
 - strncat instead of strcat
 - snprintf instead of sprint
 - Use sscanf and fscanf with input lengths (%213s)
- Stack protection makes buffer overflow very hard...
 - But very hard ≠ impossible!

Agenda

- Logistics
- Cache Lab
- Cache Concepts
- Activity 1: Traces
- C Review
- Activity 2: Getopt()
- Appendix: Examples, Style, Git, fscanf

Logistics

- Cache Lab is due Thursday, March 2nd at 11:59pm
- NO Midterm!
- Drop date Monday, Feb. 27th
- C Bootcamp happened on Sunday, Feb 19th
- Make sure you have Github working so you can commit your code!

Cache Lab: Cache Simulator Hints


- Goal: Count hits, misses, evictions and # of dirty bytes
- Procedure
 - Least Recently Used (LRU) replacement policy
 - Structs are good for storing cache line parts (valid bit, tag, LRU counter, etc.)
 - A cache is like a 2D array of cache lines

```
struct cache_line cache[S][E];
```

- Your simulator needs to handle different values of S, E, and b (block size) given at run time
 - Dynamically allocate memory!
- Dirty bytes: any payload byte whose corresponding cache block's dirty bit is set (i.e. the payload of that block has been modified, but not yet written back to main memory)

Cache Concepts

Cache Organization

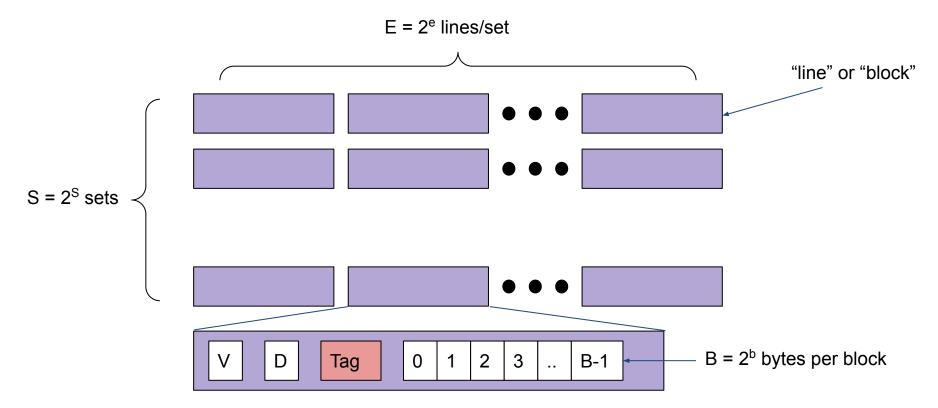

Cache Read

- Address of word: | t bits | s bits | b bits |
 - Tag: t bits
 - Set index: s bits
 - Block offset: b bits
- Steps:
 - Use set index to get appropriate set
 - Loop through lines in set to find matching tag
 - If found and valid bit is set: hit
 - Locate data starting at block offset

```
[(adb) disas phase_1
Dump of assembler code for function phase_1:
   0x000000000000400e80 <+0>:
                                       $0x8,%rsp
                                sub
   0x00000000000400e84 <+4>:
                                       $0x604420,%esi
                                mov
   0x00000000000400e89 <+9>:
                                       0x401326 <strings_not_equal>
                                calla
   0x00000000000400e8e <+14>:
                                test
                                       %al,%al
   0x00000000000400e90 <+16>:
                                je
                                       0x400e97 <phase_1+23>
   0x000000000000400e92 <+18>:
                                calla
                                       0x401577 <explode_bomb>
                                       $0x8,%rsp
   0x00000000000400e97 <+23>:
                                add
   0x00000000000400e9b <+27>:
                                reta
End of assembler dump.
```

```
[(adb) disas phase_1
Dump of assembler code for function phase_1:
                                      $0x8.%rsp
   0x000000000000400e80 <+0>:
                                sub
                                mov $0x604420 %esi
   0x00000000000400e84 <+4>:
   0x00000000000400e89 <+9>:
                                calla
                                       0x401326 <strings_not_equal>
   0x000000000000400e8e <+14>:
                                       %al,%al
                                test
   0x00000000000400e90 <+16>:
                                je
                                       0x400e97 <phase_1+23>
   0x000000000000400e92 <+18>:
                                calla
                                       0x401577 <explode_bomb>
                                       $0x8,%rsp
   0x00000000000400e97 <+23>:
                                add
   0x00000000000400e9b <+27>:
                                reta
End of assembler dump.
```

```
tianxinx@bambooshark:~$ getconf -a | grep CACHE
LEVEL1_ICACHE_SIZE
                                   32768
LEVEL1_ICACHE_ASSOC
LEVEL1_ICACHE_LINESIZE
                                   32
LEVEL1_DCACHE_SIZE
                                   32768
LEVEL1_DCACHE_ASSOC
LEVEL1_DCACHE_LINESIZE
                                   64
LEVEL2_CACHE_SIZE
                                   262144
LEVEL2_CACHE_ASSOC
LEVEL2_CACHE_LINESIZE
                                   64
LEVEL3_CACHE_SIZE
                                   8388608
LEVEL3_CACHE_ASSOC
                                   16
LEVEL3_CACHE_LINESIZE
                                   64
LEVEL4_CACHE_SIZE
LEVEL4_CACHE_ASSOC
                                   0
LEVEL4_CACHE_LINESIZE
tianxinx@bambooshark:~$
```

For the L1 dCache (data)

$$C = 32768 (32 kb)$$

$$E = 8$$

$$B = 64$$

$$S = 64$$

How did we get S?

- 64 bit address space: m = 64
- b = 6
- \bullet s = 6
- t = 52


 $0x00604420 \rightarrow 0b00000001100000100010000100000$

- tag bits: 000000011000000100
- set index bits: 010000
- block offset bits: 100000

Activity 1: Traces

Tracing a Cache

Example Cache: -s 1 -E 2 -b 2 (S=2 B=4)

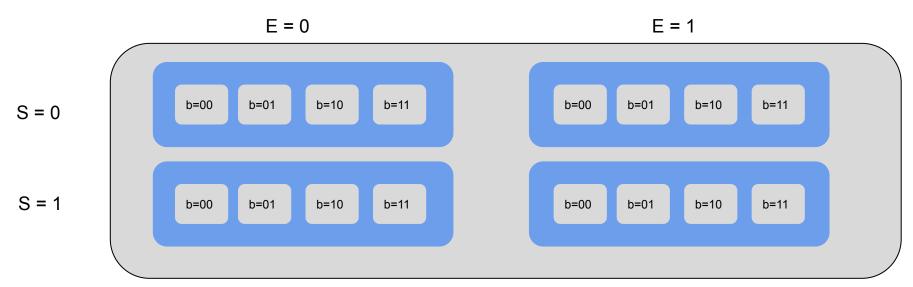

L - Load

S - Store

Memory Location

Size

Jack.trace

L 0,4

S 0,4


L 0,1

L 6,1

L 5,1

L 6,1

L 7,1

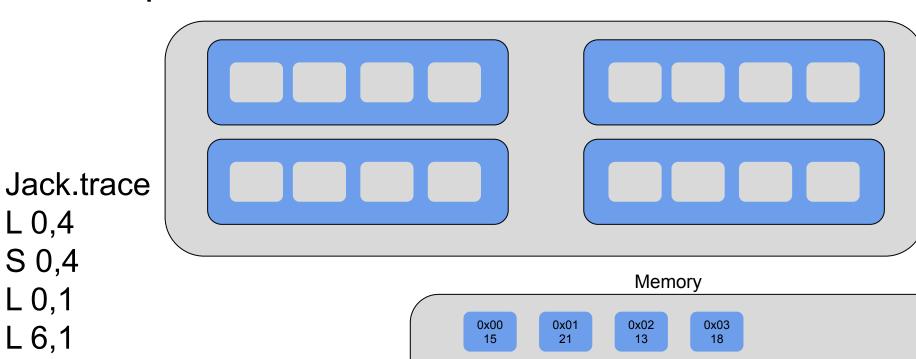

0x04

51

0x05

30

0x06

ac

0x07


b3

L 6,1 L 5,1 L 6,1


L 0,4

S 0,4

L 0,1

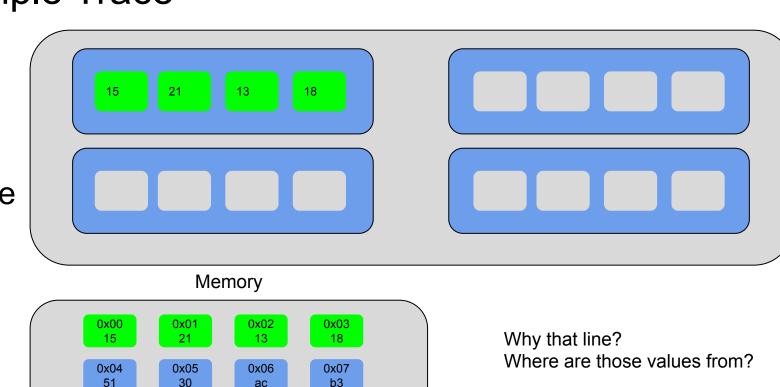

Jack.trace
L 0,4 M
S 0,4
L 0,1
L 6,1
L 5,1
L 6,1

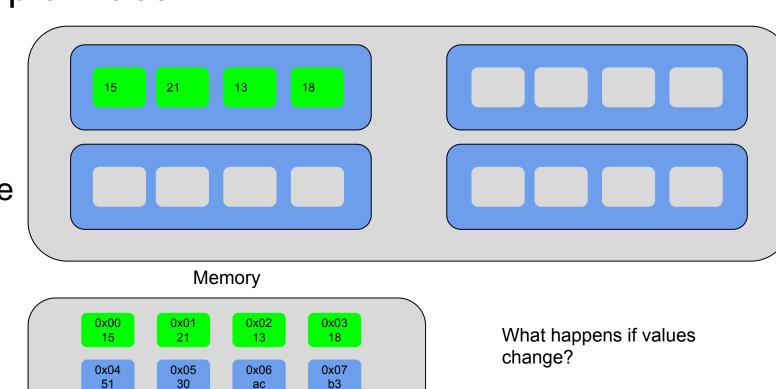

ac


Jack.trace L 0,4

L 0,1


L 6,1


L 5,1


L 6,1

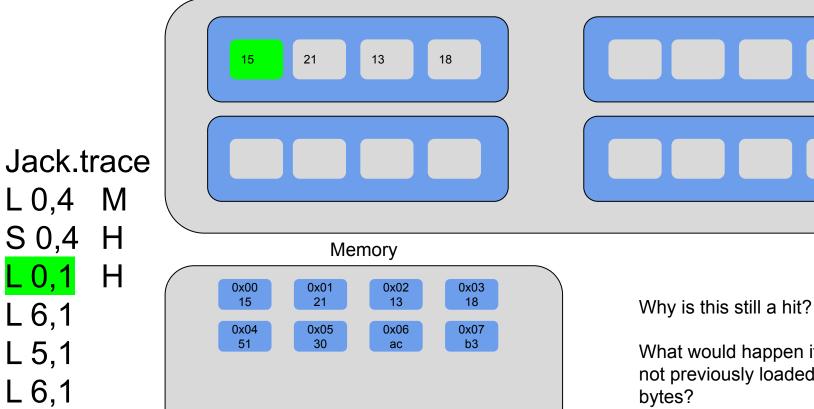

What would happen if we had not previously loaded all four

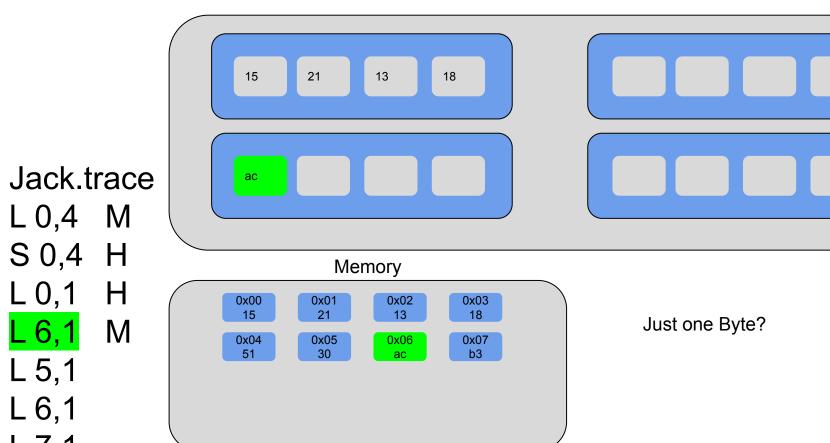

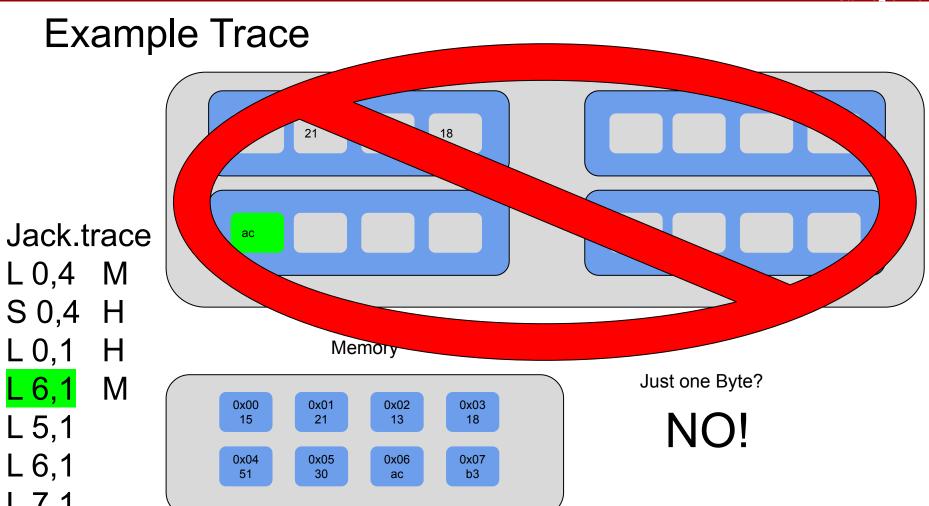


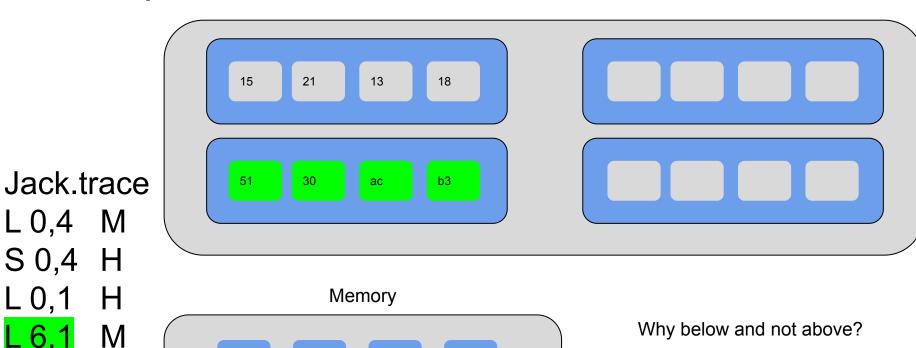

L 0,4 M S 0,4 H L 5,1

M 0x00 0x02 0x03 0x01 15 21 13 18 L 6,1 0x04 0x05 0x06 0x07 51 30 b3 ac

Why load all four bytes?

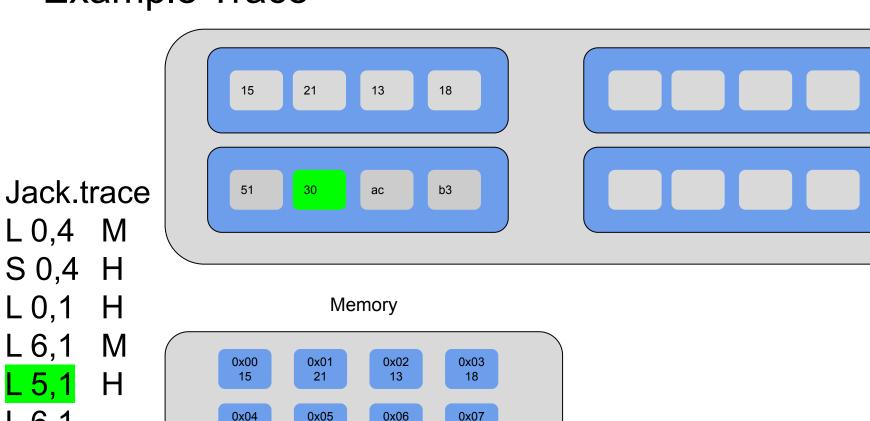

b3

ac

L 6,1

L 0,1

L 6,1

L 0,4 M

S 0,4 H

M

51

30

0x04

51

0x05


30

0x06

ac

0x07

b3

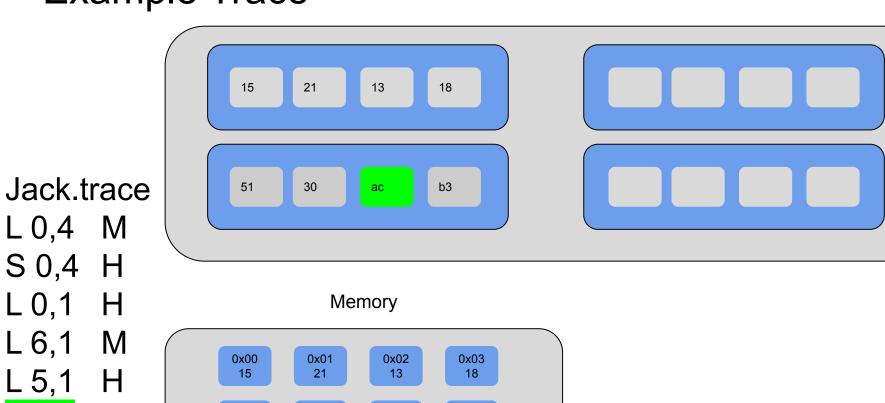

L 6,1 M L 5,1

L 0,4 M

S 0,4 H

L 0,1

0x04

51

0x05


30

0x06


ac

0x07

b3

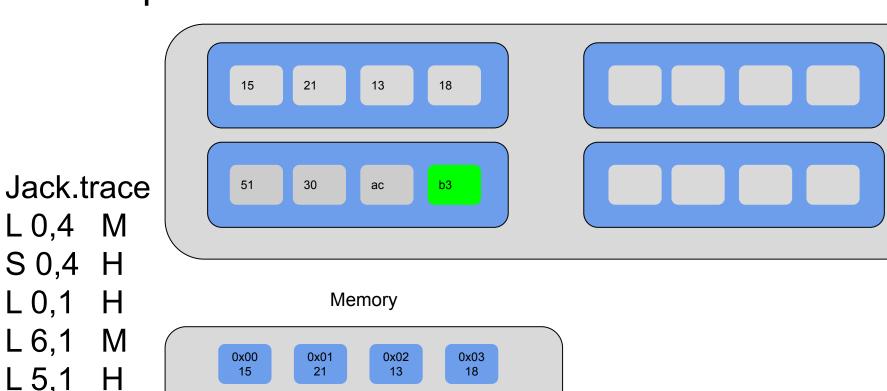


L 0,4 M S 0,4 H L 0,1 L 6,1 M L 5,1 L 6,1

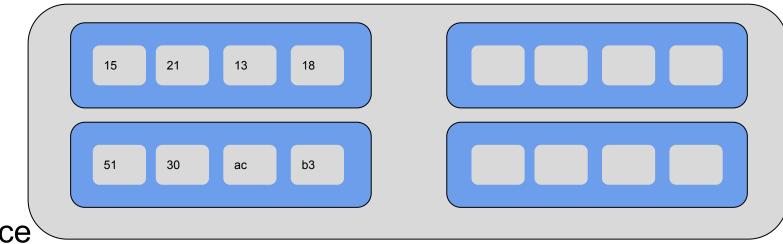


Jack2.trace

L 8,4 M

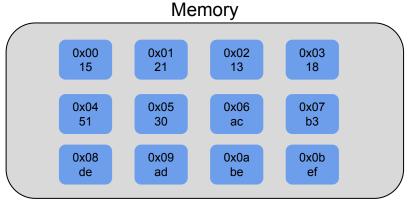


What would happen if we loaded from memory address 0x08?

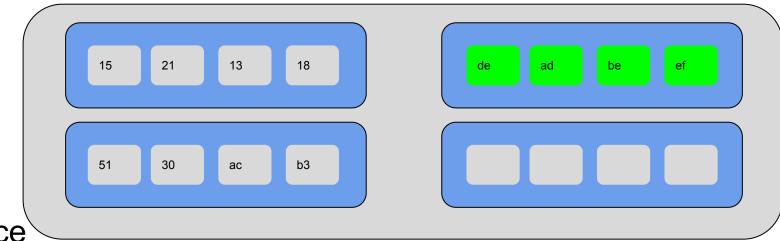

Jack2.trace

L 8,4 M

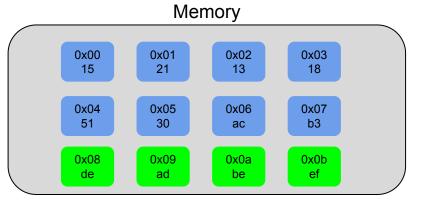

What would happen if we loaded from memory address 0x08?

C Review

C bootcamp is your go-to!

- Pointer: stores address of some value in memory
- Dereferencing a NULL pointer causes segfault
- Dereferencing a pointer: *p
- Access address of a value: p = &v

What is wrong with this code?

```
1 int main(int argc, char** argv) {
2    int *a = (int*) malloc(213 * sizeof(int));
3    for (int i=0; i<213; i++) {
4        if (a[i] == 0) a[i]=i;
5        else a[i]=-i;
6    }
7    return 0;
8 }</pre>
```

malloc can fail!

```
1 int main(int argc, char** argv) {
      int *a = (int*) malloc(213 * sizeof(int));
      if (a == NULL) return 0;
      for (int i=0; i<213; i++) {
          if (a[i] == 0) a[i]=i;
          else a[i]=-i;
6
      return 0;
8 }
```

Allocated memory is not initialized!

```
1 int main(int argc, char** argv) {
2    int *a = (int*) calloc(213, sizeof(int));
    if (a == NULL) return 0;
3    for (int i=0; i<213; i++) {
4        if (a[i] == 0) a[i]=i;
5        else a[i]=-i;
6    }
7    return 0;
8 }</pre>
```

All allocated memory must be freed!

```
1 int main(int argc, char** argv) {
      int *a = (int*) calloc(213, sizeof(int));
      if (a == NULL) return 0;
      for (int i=0; i<213; i++) {
          if (a[i] == 0) a[i]=i;
          else a[i]=-i;
6
      free(a);
      return 0;
8 }
```

C Review: Arrays

- Initializing your array
 - int *a = calloc(4, sizeof(int));
 - Allocated on Heap
 - int a[4];
 - Allocated on stack

Where does the following point to?

C Review: Structs + Unions

Struct:

 Groups list of variables under one block in memory

Union:

- Store different data types in same region of memory
- Many ways to refer to same memory location

```
struct temp {
    int i;
    char c;
};

union temp {
    int i;
    char c;
};
i/c
```

C Review: Valgrind

- What is Valgrind?
 - Tool used for debugging memory use
- Valgrind may...
 - Find corrupted memory
 - Find potential memory leaks and double frees
 - Detects invalid memory reads and writes
- To learn more... man valgrind and check the appendix

C Review Conclusion

- Did you know each concept? If not...
 - Refer to the C Bootcamp slides
- Were the concepts so easy you were bored? If not...
 - Refer to the C Bootcamp slides
- When in doubt...
 - Refer to the C Bootcamp slides
- This will be *very* important for the rest of this class, so make sure you are comfortable with the material covered or check the C Bootcamp recording!

C Programming Style

- Write comments and then implement functionality
- Communicate meaning through naming choices
- Code should be testable. Modularity supports this
- Use consistent formatting
- Common bugs: memory and file descriptor leaks, check errors and failure conditions
- Warning: *Dr. Evil* has returned for code reviews on Cache Lab! ⊙
 - Refer to 213 Style suggestions: http://cs.cmu.edu/~213/codeStyle.html

Part 0: reading man pages!

- Reading man pages is important!
- To get started, either:
 - \$ man getopt on Terminal
 - Google "man getopt"
- Overall, what does getopt do?
- What arguments does it take?
- How can you use it in a program?
- https://linux.die.net/man/3/getopt

Activity: getopt()

Part 1: Activity Setup

- Split up into groups of 2-3 people
- One person needs a laptop
- Log in to a Shark machine, and type:

```
$ wget https://www.cs.cmu.edu/~213/activities/rec6.tar
$ tar -xvf rec6.tar
$ cd rec6
```

Part 1: getopt_example.c

```
$ make getopt_example
$ ./getopt example (ARGUMENTS)
```

- What does getopt_example.c do?
- How does the program process its arguments?
- i.e. formatting specifics?
- What does the -v argument do? The -n argument?
- Hint: try \$./getopt example -v -n 5

Part 1: getopt_example.c

- What does getopt_example.c do?
 - Takes in a number as input + "counts" to that number.
 - Verbose (-v): prints all numbers counting up to that number)
- Formatting specifics
 - Use (ARG) to get getopt to process the argument
 - -v: Enables verbose mode
 - -n:NUM with NUM as user input

```
while ((opt = getopt(argc, argv, "vn:")) != -1) {
    switch (opt) {
        case 'v':
            verbose = 1;
           break;
                                                       Returns -1 when
        case 'n':
                                                       done parsing
           n = atoi(optarg);
           break;
        default:
                                                Parses value to
           fprintf(stderr, "usage: ...");
                                                store in n b/c colon
           exit(1);
```

If you get stuck...

- Reread the writeup
- Look at CS:APP Chapter 6
- Review lecture notes (<u>http://cs.cmu.edu/~213</u>)
- Come to Office Hours
- Post private question on Piazza
- man malloc, man valgrind, man gdb

Cache Lab Tips!

- Review cache and memory lectures
 - Ask if you don't understand something
- Start early, this can be a challenging lab!

- Don't get discouraged!
 - If you try something that doesn't work, take a well deserved break, and then try again
- Good luck!

Practice Problems

Class Question / Discussions

- We'll work through a series of questions
- Write down your answer for each question
- You can discuss with your classmates

```
void who(int *arr, int size) {
  for (int i = 0; i < size-1; ++i)
    arr[i] = arr[i+1];
}</pre>
```

- A. Spatial
- **B.** Temporal
- C. Both A and B
- **D.** Neither A nor B

```
void who(int *arr, int size) {
  for (int i = 0; i < size-1; ++i)
    arr[i] = arr[i+1];
}</pre>
```

- A. Spatial
- B. Temporal
- C.) Both A and B
- D. Neither A nor B

```
void coo(int *arr, int size) {
  for (int i = size-2; i >= 0; --i)
    arr[i] = arr[i+1];
}
```


- A. Spatial
- **B.** Temporal
- C. Both A and B
- **D.** Neither A nor B

```
void coo(int *arr, int size) {
  for (int i = size-2; i >= 0; --i)
    arr[i] = arr[i+1];
}
```

- A. Spatial
- **B.** Temporal
- C.) Both A and B
- **D.** Neither A nor B

Calculating Cache Parameters


 Given the following address partition, how many int values will fit in a single data block?

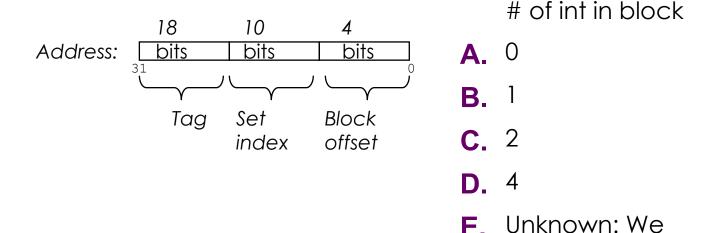

need more info

Calculating Cache Parameters


 Given the following address partition, how many int values will fit in a single data block?

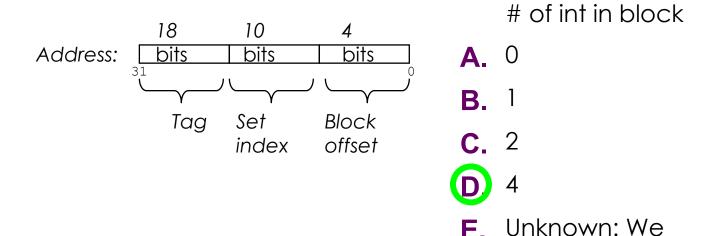

need more info


Direct-Mapped Cache Example

 Assuming a 32-bit address (i.e. m=32), how many bits are used for tag (t), set index (s), and block offset (b).

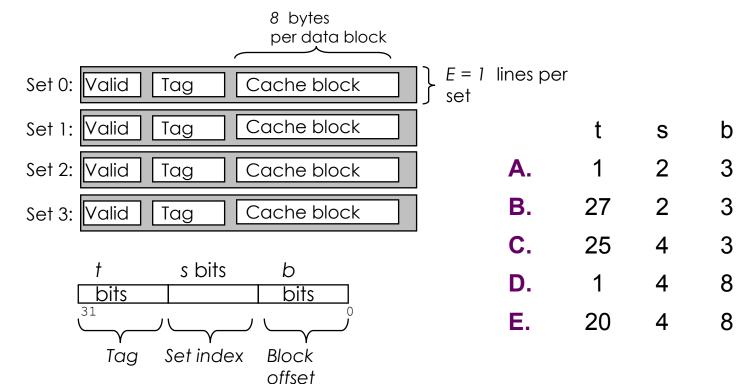


Direct-Mapped Cache Example

 Assuming a 32-bit address (i.e. m=32), how many bits are used for tag (t), set index (s), and block offset (b).

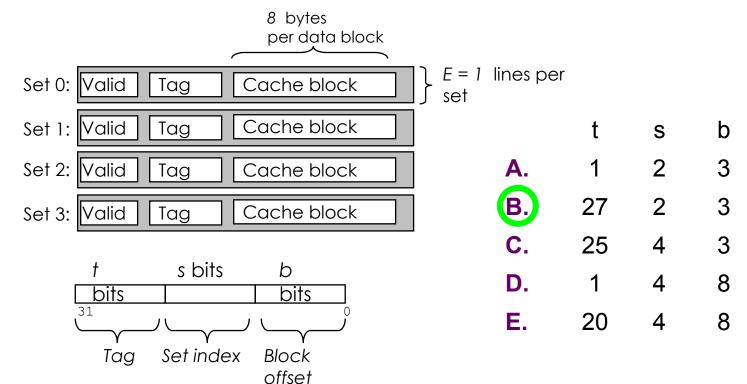


Which Set Is it?

Which set is the address 0xFA1C located in?

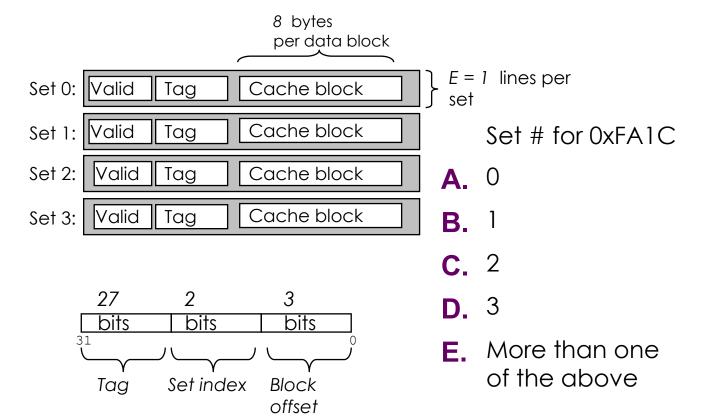


Which Set Is it?


Which set is the address 0xFA1C located in?

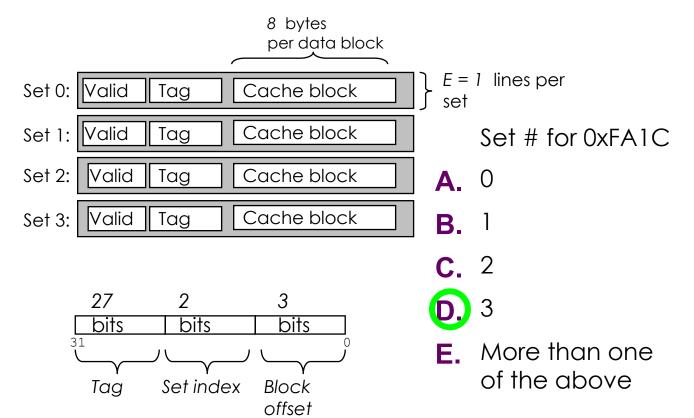

Cache Block Range

 What range of addresses will be in the same block as address 0xFA1C?
 8 bytes

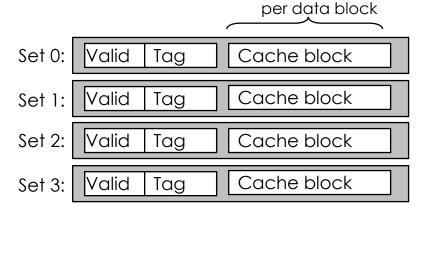

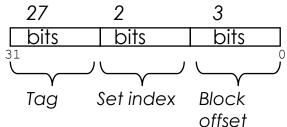



Addr. Range

- A. OxFA1C
- **B.** 0xFA1C 0xFA23
- C. OxFA1C OxFA1F
- **D.** 0xFA18 0xFA1F
- E. It depends on the access size (byte, word, etc)

Cache Block Range

 What range of addresses will be in the same block as address 0xFA1C?
 8 bytes

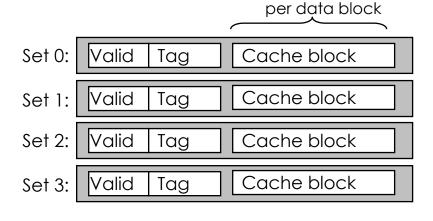

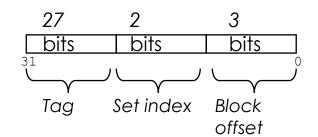

Addr. Range

- A. OxFA1C
- **B.** 0xFA1C 0xFA23
- C. OxFA1C OxFA1F
- **D.** 0xFA18 0xFA1F
- E. It depends on the access size (byte, word, etc)

If N = 16, how many bytes does the loop access of a?

If N = 16, how many bytes does the loop access of a?

Consider a 32 KB cache in a 32 bit address space. The cache is 8-way associative and has 64 bytes per block. A LRU (Least Recently Used) replacement policy is used. What is the miss rate on 'pass 1'?

```
void muchAccessSoCacheWow(int *bigArr) {
    // 48 KB array of ints
                                                                          Miss Rate
    int length = (48*1024)/\text{sizeof(int)};
                                                                             0 %
                                                                  Α
    int access = 0;
    // traverse array with stride 8
                                                                   B
                                                                             25 %
    // pass 1
                                                                             33 %
    for (int i = 0; i < length; i+=8) {
        access = bigArr[i];
                                                                             50 %
                                                                   ח
    // pass 2
                                                                  E
                                                                             66 %
    for (int i = 0; i < length; i+=8) {
        access = bigArr[i];
```

Consider a 32 KB cache in a 32 bit address space. The cache is 8-way associative and has 64 bytes per block. A LRU (Least Recently Used) replacement policy is used. What is the miss rate on 'pass 1'?

```
void muchAccessSoCacheWow(int *bigArr) {
    // 48 KB array of ints
                                                                          Miss Rate
    int length = (48*1024)/\text{sizeof(int)};
                                                                              0 %
                                                                   Α
    int access = 0;
    // traverse array with stride 8
                                                                   B
                                                                             25 %
    // pass 1
                                                                             33 %
    for (int i = 0; i < length; i+=8) {
        access = bigArr[i];
                                                                             50 %
    // pass 2
                                                                             66 %
                                                                   Ε
    for (int i = 0; i < length; i+=8) {
        access = bigArr[i];
```

Consider a 32 KB cache in a 32 bit address space. The cache is 8-way associative and has 64 bytes per block. A LRU (Least Recently Used) replacement policy is used. What is the miss rate on 'pass 2'?

```
void muchAccessSoCacheWow(int *bigArr) {
    // 48 KB array of ints
                                                                          Miss Rate
    int length = (48*1024)/\text{sizeof(int)};
                                                                              0 %
                                                                   Α
    int access = 0;
    // traverse array with stride 8
                                                                   B
                                                                             25 %
    // pass 1
                                                                             33 %
    for (int i = 0; i < length; i+=8) {
        access = bigArr[i];
                                                                             50 %
                                                                   ח
    // pass 2
                                                                   E
                                                                             66 %
    for (int i = 0; i < length; i+=8) {
        access = bigArr[i];
```

Consider a 32 KB cache in a 32 bit address space. The cache is 8-way associative and has 64 bytes per block. A LRU (Least Recently Used) replacement policy is used. What is the miss rate on 'pass 2'?

```
void muchAccessSoCacheWow(int *bigArr) {
    // 48 KB array of ints
                                                                          Miss Rate
    int length = (48*1024)/\text{sizeof(int)};
                                                                              0 %
                                                                   Α
    int access = 0;
    // traverse array with stride 8
                                                                   B
                                                                             25 %
    // pass 1
                                                                             33 %
    for (int i = 0; i < length; i+=8) {
        access = bigArr[i];
                                                                  ∢D '
                                                                             50 %
    // pass 2
                                                                             66 %
    for (int i = 0; i < length; i+=8) {
        access = bigArr[i];
```

Detailed explanation in Appendix!


Appendix

Appendix: C Programming Style

- Properly document your code
 - Function + File header comments, overall operation of large blocks, any tricky bits
- Write robust code check error and failure conditions
- Write modular code
 - Use interfaces for data structures, e.g. create/insert/remove/free functions for a linked list
 - No magic numbers use #define or static const
- Formatting
 - 80 characters per line (use Autolab's highlight feature to double-check)
 - Consistent braces and whitespace
- No memory or file descriptor leaks

Appendix: Git: What is Git?

- Most widely used version control system out there
- Version control:
 - Help track changes to your source over time
 - Help teams manage changes on st code

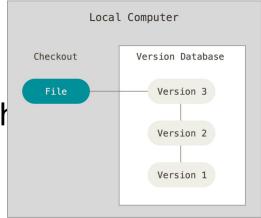

Appendix: Git Usage

- Commit early and often!
 - At minimum at every major milestone
 - Commits don't cost anything!
- Popular stylistic conventions
 - Branches: short, descriptive names
 - Commits: A single, logical change. Split large changes into multiple commits.
 - Messages:
 - Summary: Descriptive, yet succinct
 - Body: More detailed description on what you changed, why you changed it, and what side effects it may have

Git Commands

- Clone: git clone <clone-repository-url>
- Add: git add . or git add <file-name>
- Push / Pull: git push / git pull
- · Commit: git commit -m "your-commit-message"
 - Good commit messages are key!
 - Bad:"commit", "change", "fixed"
 - Good: "Fixed buffer overflow potential in AttackLab"

Appendix: Parsing Input with fscanf

- fscanf(FILE *stream, const char *format, ...)
 - "scanf" but for files
- Arguments
 - 1. A stream pointer, e.g. from fopen()
 - 2. Format string for parsing, e.g "%c %d,%d"
 - 3+. Pointers to variables for parsed data
 - Can be pointers to stack variables
- Return Value
 - Success: # of parsed vars
 - Failure: EOF
- man fscanf

Appendix: fscanf() Example

```
FILE *pFile;
pFile = fopen("trace.txt", "r"); // Open file for reading
// TODO: Error check sys call
char access type;
unsigned long address;
int size;
// Line format is " S 2f,1" or " L 7d0,3"
// - 1 character, 1 hex value, 1 decimal value
while (fscanf(pFile, " %c %lx, %d", &access type, &address, &size) > 0)
   // TODO: Do stuff
fclose(pFile); // Clean up Resources
```

Appendix: Discussion Questions

- What did the optimal transversal orders have in common?
- How does the pattern generalize to int[8][8] A and a cache that holds 4 lines each of 4 int's?

Appendix: Valgrind

- Finding memory leaks
 - \$ valgrind -leak-resolution=high
 - -leak-check=full -show-reachable=yes
 - -track-fds=yes ./myProgram arg1 arg
- Remember that Valgrind can be used for other things, like finding invalid reads and writes!

Appendix: \$ man 3 getopt

- int getopt(int argc, char * const argv[], const char *optstring);
 - int argc → argument count passed to main()
 - Note: includes executable, so ./a.out 1 2 has argc=3
 - char * const argv is argument string array passed to main
 - const char *optstring → string with command line arguments
 - Characters followed by colon require arguments
 - Find argument text in char *optarg
 - getopt can't find argument or finds illegal argument sets optarg to "?"
 - Example: "abc:d:"
 - a and b are boolean arguments (not followed by text)
 - c and d are followed by text (found in char *optarg)
- Returns: getopt returns -1 when done parsing

Appendix: Clang / LLVM

- Clang is a (gcc equivalent) C compiler
 - Support for code analyses and transformation
 - Compiler will check you variable usage and declarations
 - Compiler will create code recording all memory accesses to a file
 - Useful for Cache Lab Part B (Matrix Transpose)