

Top choice printer in the Asian packaging market



This printer delivers top quality, reliability, and efficiency at an attractive price.



ABOUT LEIBINGER

Trusted partner

Companies from all industries rely on LEIBINGER every day.

Family-owned

Supporting the same values that Paul Leibinger set out in 1948.

Made in Germany

100% precision-engineered at our factory in Tuttlingen.

Disruptive innovation

We're constantly improving and innovating to make our customers more productive.

Sustainability

Solid reliability, fair maintenance and ultra-low power and solvents consumption.

Global presence

Wherever you are in the world, LEIBINGER and our 150 partners are there for you.

Unique technology = Your benefits

1

Highest productivity

LEIBINGER's **fully automatic nozzle sealing technology** is unique in the market. It completely prevents clogging and eliminates the need for time-consuming cleaning by sealing ink in an airtight circuit during printing breaks. This guarantees seamless start & stop functionality and high quality printing at any time — no interruptions, and no downtime.

2

High-precision, ultra-reliable marking

The LEIBINGER brand stands for **unmatched reliability and sustainability**. Our German-engineered printers are crafted to perfection and trusted globally. With 85% in-house production, we ensure maximum quality control. Recognized worldwide as true plug & print solutions, LEIBINGER printers operate seamlessly, providing 100% peace of mind — a testament to our commitment to your success.

3

Lowest costs and maintenance effort

LEIBINGER's state-of-the-art CIJ printers have the **lowest Total Cost of Ownership (TCO)** offering optimized consumables and power consumption, and minimum maintenance. Unlike other printer providers, we focus on replacing only necessary spare parts, avoiding the need to replace entire ink core modules.





JET3 ECO Details

Print lines

≡ 5

Speed up to

⌚ 403 m/min

Print raster

↕ 32 dots

Technical details



- » LEIBINGER's unique nozzle sealing technology
- » Inks: dye-based, soft pigmented, heavy pigmented, food-grade ink, food packaging inks
- » Nozzle sizes: 60µm, 70µm
- » IP rating: IP 54, IP 65 (Option)
- » Interfaces: USB, Ethernet, I/O signals (9/8), serial interface RS232
- » Touch screen display: 10.4"

Environmental conditions

- » 100 V-240 V, 50-60 Hz, max. 40 VA
- » Temperature +5°C to +45°C
- » Relative humidity max. 90%, non-condensing
- » No external air pressure necessary (except for IP 65 option)

Dimensions

Umbilical length: 3 m



SK6

Opt. SK4:

JET3 ECO printer line

Efficient and affordable—the perfect combination



Cost-Effective CIJ solution



Engineered for high-contrast inks



Dustproof and waterproof expert

Print on any material and on any shape



Bio-foil



Carton



Ceramic



Film



Foil



Glass



Metal



Plastic



Rubber



Wire




Wood

”

We would put a
LEIBINGER on and it
would work straight
out of the box.

*Gary Fogg, Head of
Production, Four Peaks
Brewery,
USA*

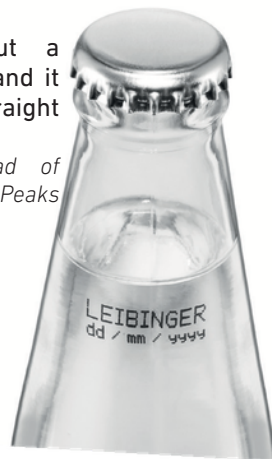

techbott
U's TECHNOLOGY PARTNER

Address : 07-004/A/85/P Jk Nagar Jeedimetla
Hyderabad Telangana 500055 India.
Email id : info@techbottindia.com
Phone no : +91 7337335751