



ENGLISH

Datasheet

RS Pro Article: 1449416

RS Pro 18650 26H Li-ion Battery Pack

Tested and approved to UN38.3




1 Preface

This manual describes the type and size, performance, technical characteristics, warning and caution.

2 Product and Model

- 2.1 Products: Lithium-ion Battery Pack
- 2.2 Model: RS Pro ICR 18650-26H M(18650 2600 Ah 14.8 V 4S1P)
- 2.3 Picture and output wire (To prevail in kind)

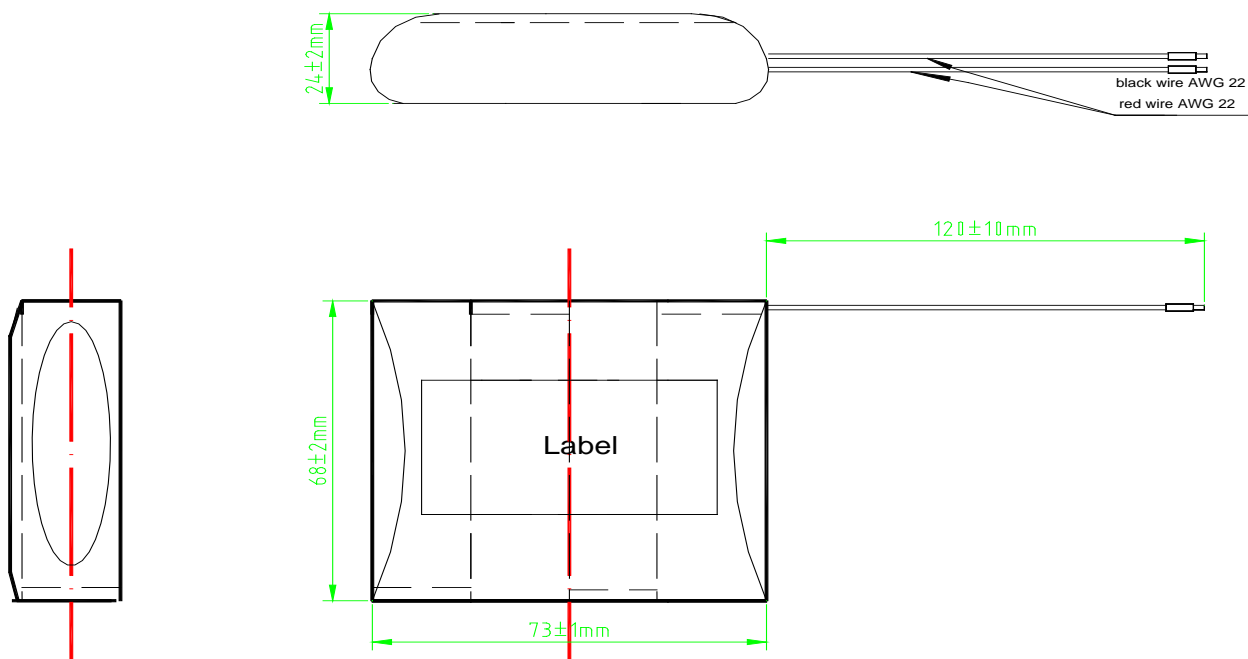

1.	Positive	Red one wire with 22 AWG	Length: 120 ± 10 mm	Molex 39-01-4021
2.	Negative	Black one wire with 22 AWG	Length: 120 ± 10 mm	

3 Battery Pack Specifications

Item		Parameters
Nominal Voltage		14.8 V
Typical capacity		2.6 Ah (At 0.2°C, 8.25 V discharge)
Discharge	Max. Discharge Current	> 4 A (ambient temperature 25°C)
	Cut-off voltage	11 V
Charge	Voltage	16.80 V \pm 0.05 V
	Current	Standard Charge: 0.5°C Rapid Charge: 1°C
	Max. Current	1°C (ambient temperature 25°C)
	Charge mode	CC/CV, use special lithium charger
Inner resistance	Discharging Inner resistance	$\leq 100 \text{ m}\Omega$
Operation temperature / humidity range	Charge	0°C to +52°C
	Discharge	-20°C to +60°C
		When the environment temperature is higher than 45°C, pay attention to ventilation and heat rejection.
Storage temperature/ humidity range	Temperature	1 year: -20 to 20°C 3 months: -20 to 45°C 1 month: -20 to 60°C
Protection function	Over charge protection, Over discharge protection	
Shell material	PVC	
Weight	187 g	
Size (L x W x H) mm	73 x 68 x 24 (1-2-1 mm)	

4. Protective circuits;(CL-S04-019-A01-F4ST)

Item	Min.	Typical	Max.	Unit.
Over-Charge detect voltage	4.225	4.25	4.275	V
Over-Charge recovery voltage	4.10	4.15	4.20	V
Over-Discharge detect voltage	2.62	2.70	2.78	V
Over-Discharge recovery voltage	2.90	3.00	3.10	V
Overcurrent protection	9	13	17	A
Idle mode			50	μA
Operating Temperature	-20	25	60	$^{\circ}\text{C}$
Main loops electrify resistance			100	$\text{m}\Omega$

