

1. Description


1.1. Project

Project Name	BSPOpenDome
Board Name	BSPOpenDome
Generated with:	STM32CubeMX 4.23.0
Date	11/27/2017

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103RCTx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

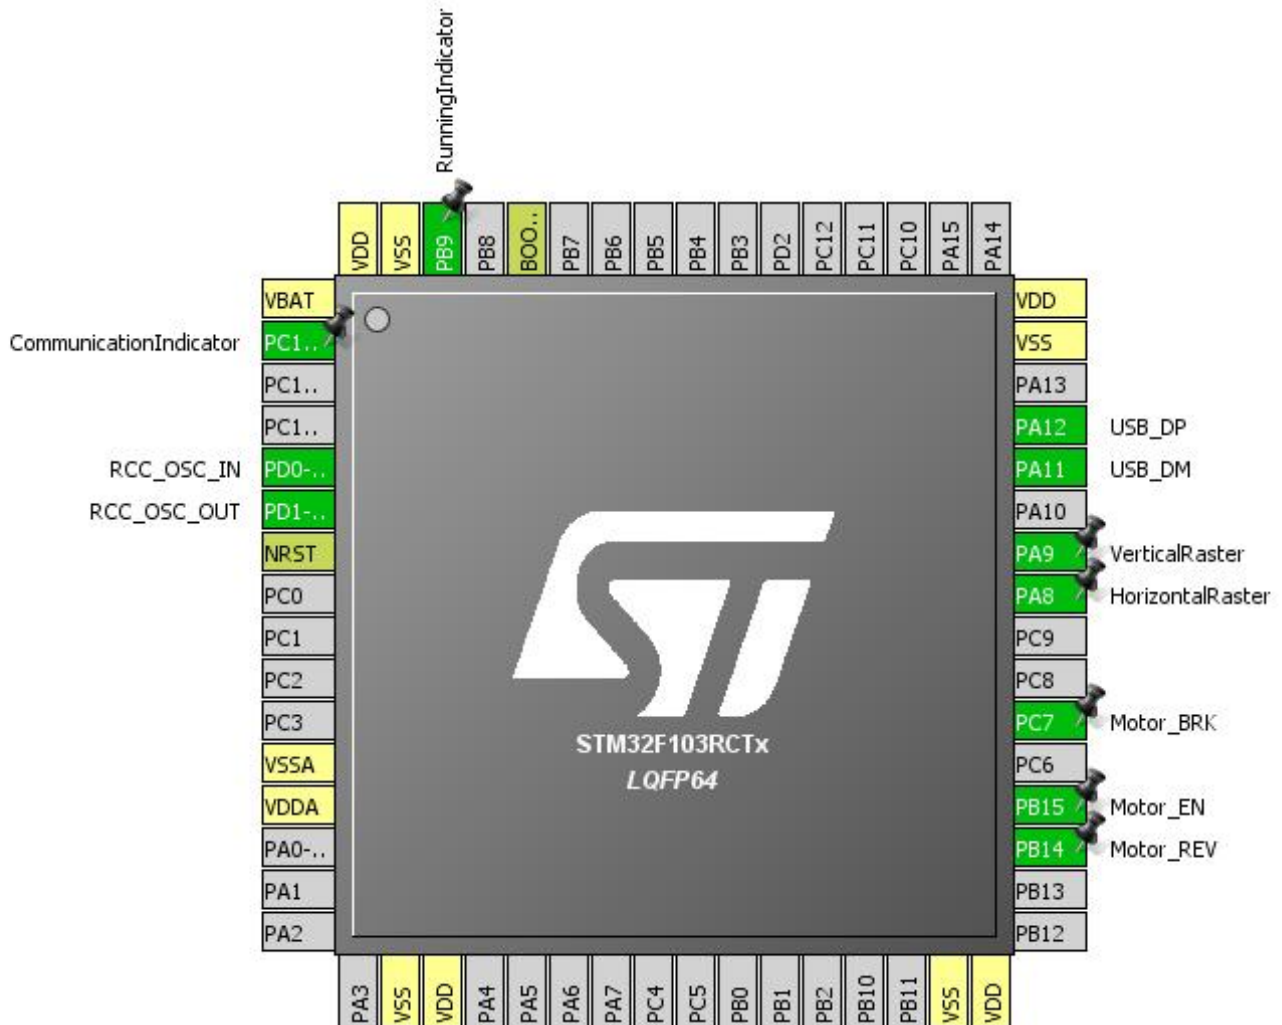


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC *	I/O	GPIO_Output	CommunicationIndicator
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
18	VSS	Power		
19	VDD	Power		
31	VSS	Power		
32	VDD	Power		
35	PB14 *	I/O	GPIO_Output	Motor_REV
36	PB15 *	I/O	GPIO_Output	Motor_EN
38	PC7 *	I/O	GPIO_Output	Motor_BRK
41	PA8	I/O	GPIO_EXTI8	HorizontalRaster
42	PA9	I/O	GPIO_EXTI9	VerticalRaster
44	PA11	I/O	USB_DM	
45	PA12	I/O	USB_DP	
47	VSS	Power		
48	VDD	Power		
60	BOOT0	Boot		
62	PB9 *	I/O	GPIO_Output	RunningIndicator
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

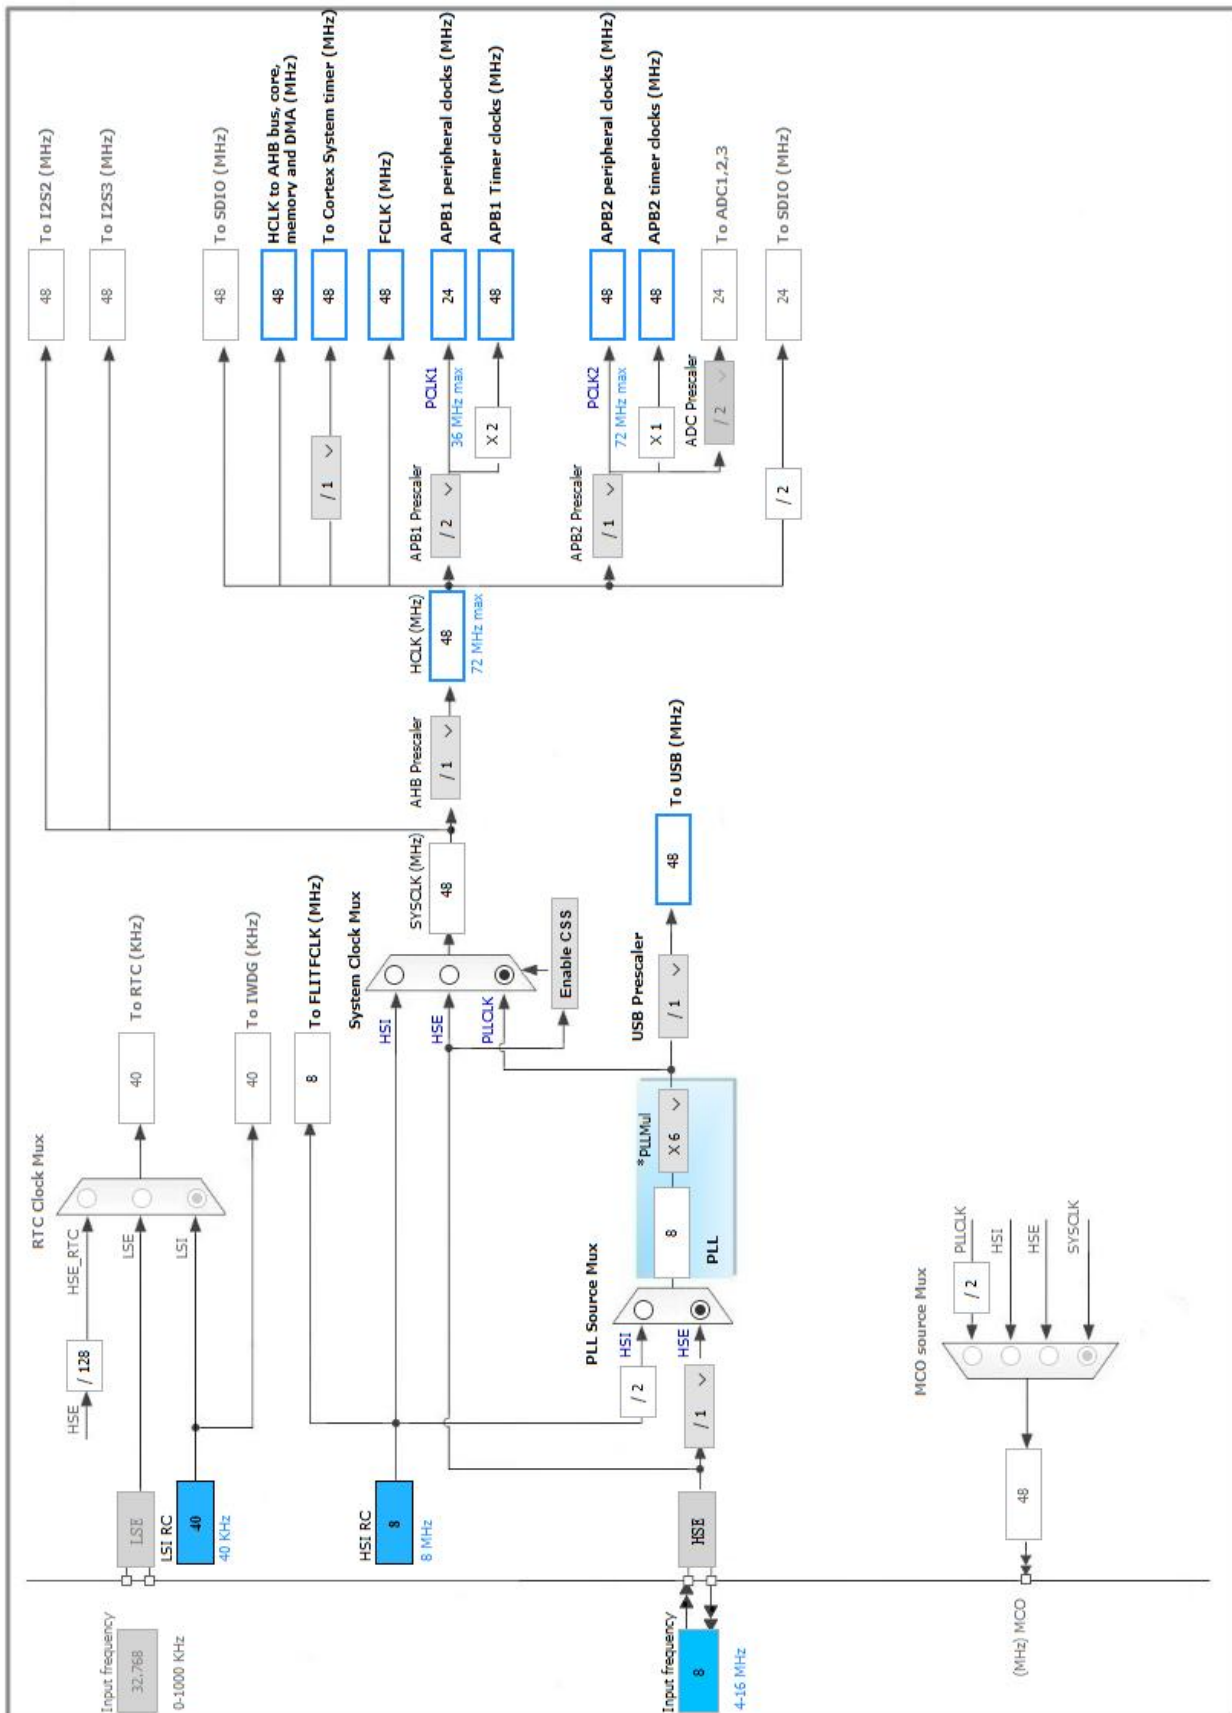

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	1 WS (2 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.2. SYS

Debug: No Debug

Timebase Source: SysTick

5.3. TIM4

mode: Clock Source

5.3.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	48-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	1000-1 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Enable *

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

5.4. USB

mode: Device (FS)

5.4.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	8 Bytes

Power Parameters:

Low Power	Disabled
Link Power Management	Disabled
Battery Charging	Disabled

5.5. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.5.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

USB CDC Rx Buffer Size	2048
USB CDC Tx Buffer Size	2048

5.5.2. Device Descriptor:

Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product Identifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	n/a	Low	CommunicationIndicator
	PB14	GPIO_Output	Output Push Pull	n/a	Low	Motor_REV
	PB15	GPIO_Output	Output Push Pull	n/a	Low	Motor_EN
	PC7	GPIO_Output	Output Push Pull	n/a	Low	Motor_BRK
	PA8	GPIO_EXTI8	External Interrupt Mode with Rising/Falling edge	Pull-up *	n/a	HorizontalRaster
	PA9	GPIO_EXTI9	External Interrupt Mode with Rising/Falling edge	Pull-up *	n/a	VerticalRaster
	PB9	GPIO_Output	Output Push Pull	n/a	Low	RunningIndicator

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USB low priority or CAN RX0 interrupts	true	0	0
EXTI line[9:5] interrupts	true	0	0
TIM4 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USB high priority or CAN TX interrupts	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103RCTx
Datasheet	14611_Rev12

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	BSPOpenDome
Project Folder	C:\Users\17657\Desktop\BSPDemo\BSPOpenDome
Toolchain / IDE	EWARM
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No