1. Description

1.1. Project

Project Name	DSv2
Board Name	DSv2.2Pro
Generated with:	STM32CubeMX 4.25.0
Date	05/03/2018

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103RCTx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration
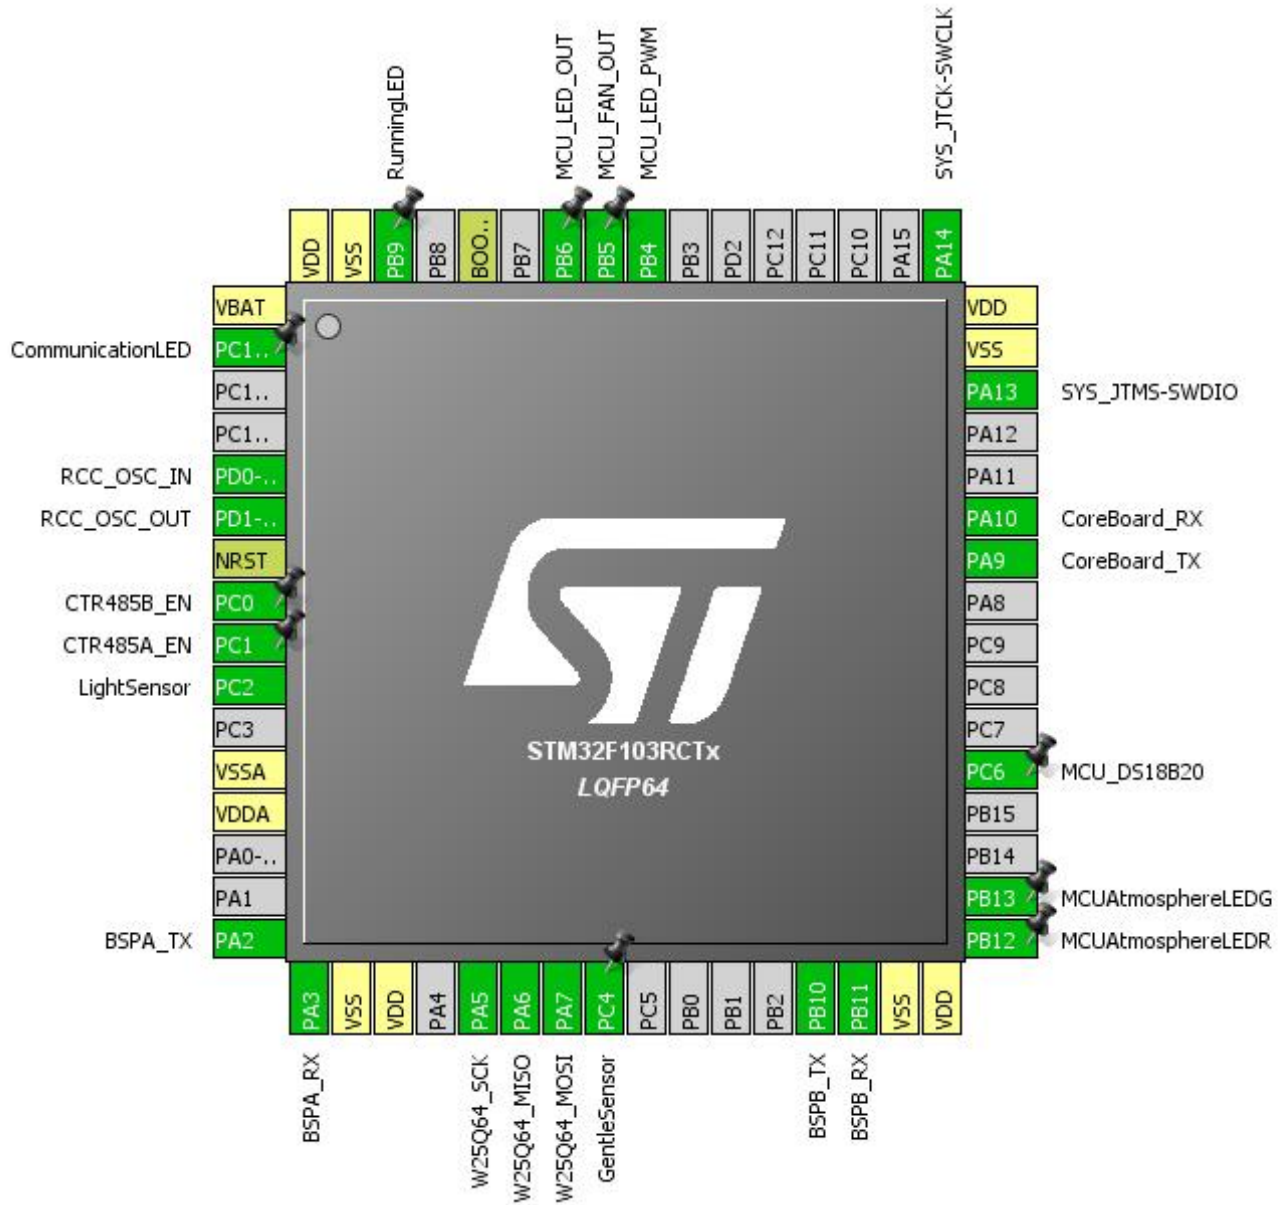
3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC *	I/O	GPIO_Output	CommunicationLED
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	PC0 *	I/O	GPIO_Output	CTR485B_EN
9	PC1 *	I/O	GPIO_Output	CTR485A_EN
10	PC2	I/O	ADC1_IN12	LightSensor
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	BSPA_TX
17	PA3	I/O	USART2_RX	BSPA_RX
18	VSS	Power		
19	VDD	Power		
21	PA5	I/O	SPI1_SCK	W25Q64_SCK
22	PA6	I/O	SPI1_MISO	W25Q64_MISO
23	PA7	I/O	SPI1_MOSI	W25Q64_MOSI
24	PC4 *	I/O	GPIO_Input	GentleSensor
29	PB10	I/O	USART3_TX	BSPB_TX
30	PB11	I/O	USART3_RX	BSPB_RX
31	VSS	Power		
32	VDD	Power		
33	PB12 *	I/O	GPIO_Output	MCUAtmosphereLEDR
34	PB13 *	I/O	GPIO_Output	MCUAtmosphereLEDG
37	PC6 *	I/O	GPIO_Output	MCU_DS18B20
42	PA9	I/O	USART1_TX	CoreBoard_TX
43	PA10	I/O	USART1_RX	CoreBoard_RX
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
56	PB4	I/O	TIM3_CH1	MCU_LED_PWM
57	PB5 *	I/O	GPIO_Output	MCU_FAN_OUT
58	PB6 *	I/O	GPIO_Output	MCU_LED_OUT
60	BOOT0	Boot		
62	PB9 *	I/O	GPIO_Output	RunningLED

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
63	VSS	Power		
64	VDD	Power		

 * The pin is affected with an I/O function

4. Clock Tree Configuration
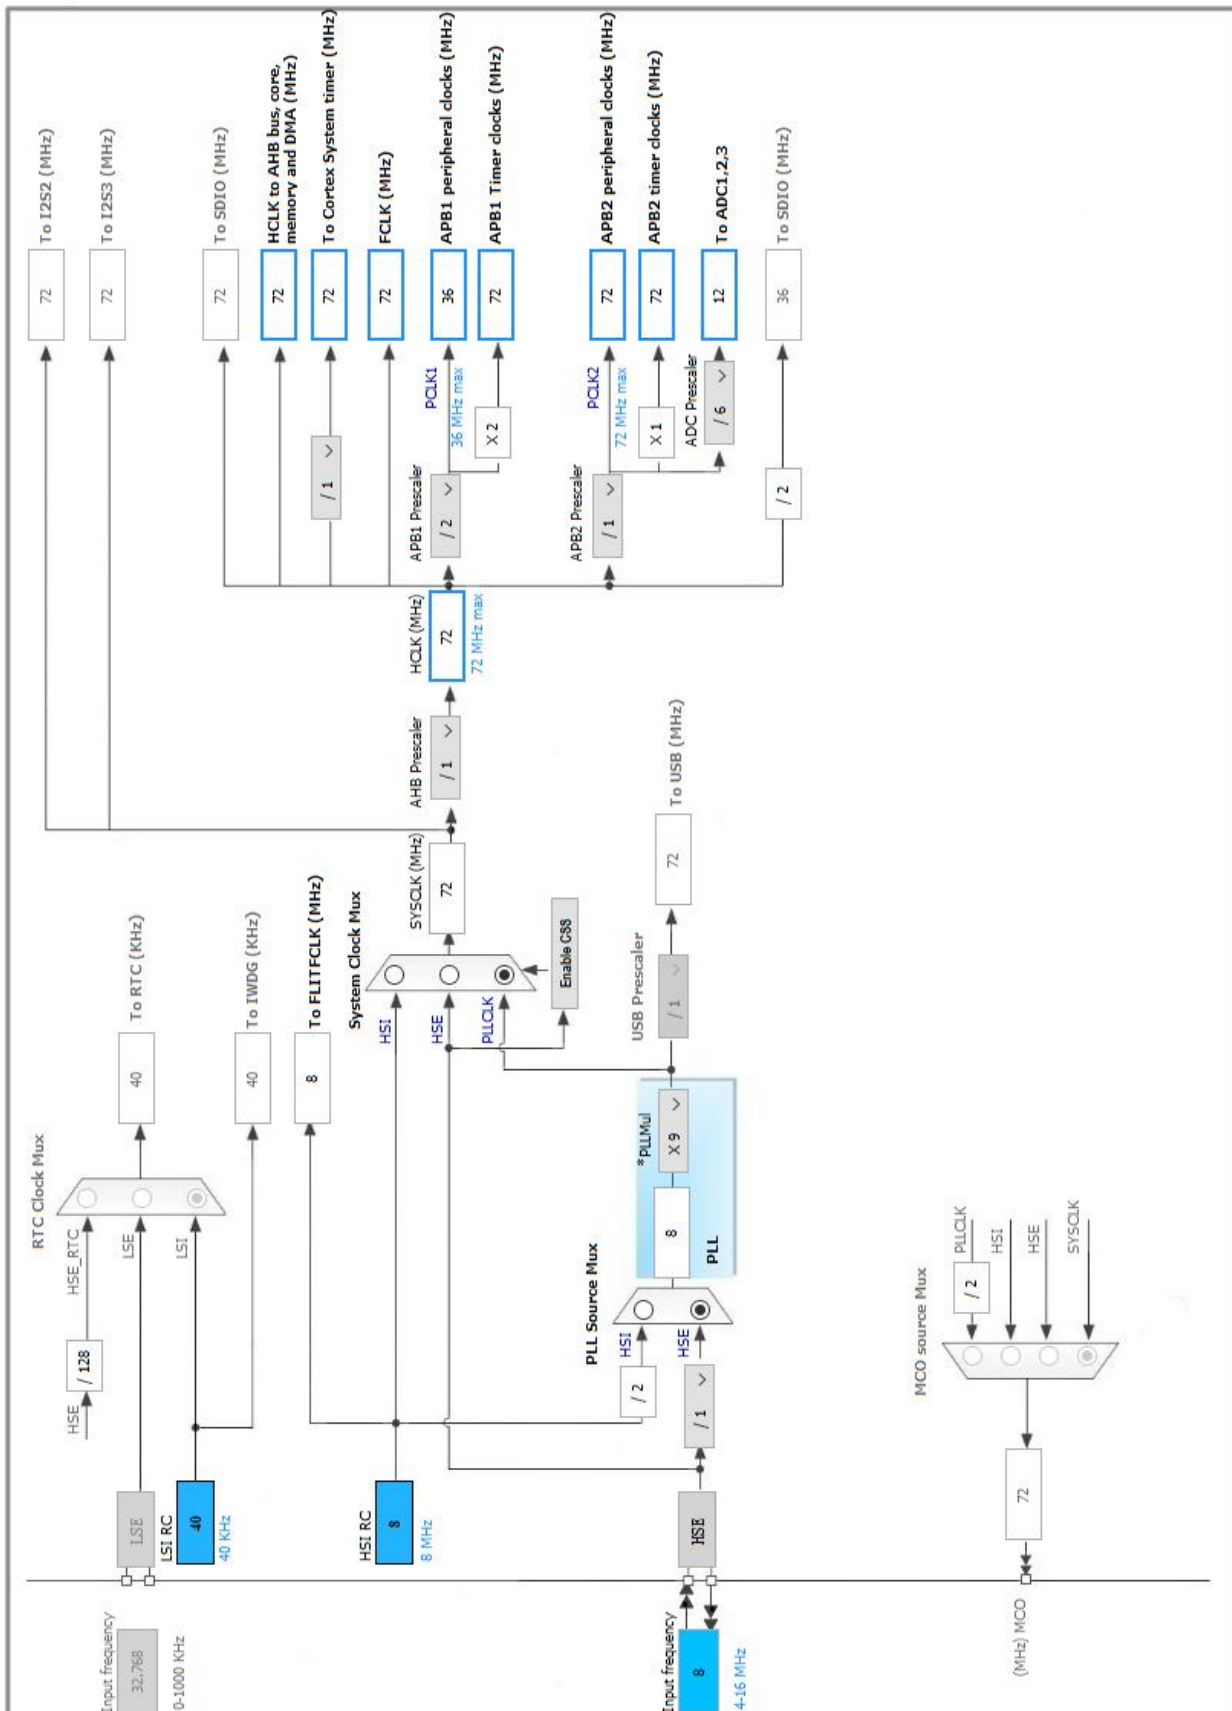
5. IPs and Middleware Configuration

5.1. ADC1
mode: IN12
mode: Temperature Sensor Channel

5.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Data Alignment	Right alignment
Scan Conversion Mode	Enabled
Continuous Conversion Mode	**Enabled ***
Discontinuous Conversion Mode	Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Number Of Conversion	**2 ***
External Trigger Conversion Source	Regular Conversion launched by software
<u>Rank</u>	1
Channel	Channel 12
Sampling Time	**239.5 Cycles ***
<u>Rank</u>	**2 ***
Channel	**Channel Temperature Sensor ***
Sampling Time	**239.5 Cycles ***

ADC_Injected_ConversionMode:

Number Of Conversions	0

WatchDog:

Enable Analog WatchDog Mode	false

5.2. RCC
High Speed Clock (HSE): Crystal/Ceramic Resonator

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

5.3. SPI1

Mode: Full-Duplex Master

5.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**64 ***
Baud Rate	**1.125 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.4. SYS

Debug: Serial Wire
Timebase Source: SysTick

5.5. TIM3

Channel1: PWM Generation CH1

5.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**72-1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**4000-1 ***
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

5.6. TIM4

mode: Clock Source

5.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**72-1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**100-1 ***
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

5.7. TIM5

mode: Clock Source

5.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**72-1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**1000-1 ***
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

5.8. USART1

Mode: Asynchronous

5.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.9. USART2

Mode: Asynchronous

5.9.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.10. USART3

Mode: Asynchronous

5.10.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PC2	ADC1_IN12	Analog mode	n/a	n/a	LightSensor
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	**High ***	W25Q64_SCK
	PA6	SPI1_MISO	Input mode	No pull-up and no pull-down	**n/a**	W25Q64_MISO
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	**High ***	W25Q64_MOSI
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM3	PB4	TIM3_CH1	Alternate Function Push Pull	n/a	Low	MCU_LED_PWM
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	**High ***	CoreBoard_TX
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	**n/a**	CoreBoard_RX
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	**High ***	BSPA_TX
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	**n/a**	BSPA_RX
USART3	PB10	USART3_TX	Alternate Function Push Pull	n/a	**High ***	BSPB_TX
	PB11	USART3_RX	Input mode	No pull-up and no pull-down	**n/a**	BSPB_RX
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	n/a	Low	CommunicationLED
	PC0	GPIO_Output	Output Push Pull	n/a	Low	CTR485B_EN
	PC1	GPIO_Output	Output Push Pull	n/a	Low	CTR485A_EN
	PC4	GPIO_Input	Input mode	**Pull-up ***	n/a	GentleSensor
	PB12	GPIO_Output	Output Push Pull	**n/a**	Low	MCUAtmosphereLEDR
	PB13	GPIO_Output	Output Push Pull	**n/a**	Low	MCUAtmosphereLEDG
	PC6	GPIO_Output	Output Push Pull	**n/a**	Low	MCU_DS18B20
	PB5	GPIO_Output	Output Push Pull	**n/a**	Low	MCU_FAN_OUT
	PB6	GPIO_Output	Output Push Pull	**n/a**	Low	MCU_LED_OUT
	PB9	GPIO_Output	Output Push Pull	**n/a**	Low	RunningLED

6.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_RX	DMA1_Channel5	Peripheral To Memory	Low
USART2_RX	DMA1_Channel6	Peripheral To Memory	Low
USART3_RX	DMA1_Channel3	Peripheral To Memory	Low
ADC1	DMA1_Channel1	Peripheral To Memory	Low

USART1_RX: DMA1_Channel5 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

USART2_RX: DMA1_Channel6 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

USART3_RX: DMA1_Channel3 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

ADC1: DMA1_Channel1 DMA request Settings:

Mode:	**Circular ***
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***

Memory Data Width: **Word** *

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel1 global interrupt	true	0	0
DMA1 channel3 global interrupt	true	0	0
DMA1 channel5 global interrupt	true	0	0
DMA1 channel6 global interrupt	true	0	0
ADC1 and ADC2 global interrupts	true	0	0
TIM3 global interrupt	true	0	0
TIM4 global interrupt	true	0	0
SPI1 global interrupt	true	0	0
USART1 global interrupt	true	0	0
USART2 global interrupt	true	0	0
USART3 global interrupt	true	0	0
TIM5 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103RCTx
Datasheet	14611_Rev12

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	DSv2.2Pro
Project Folder	C:\Users\bertz\Desktop\DS2.2\DSv2.2Pro
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report