


# Hardware

8. ARM: Sběrnice & registry  
3. ročník

# Advanced Microcontroller Bus Architecture

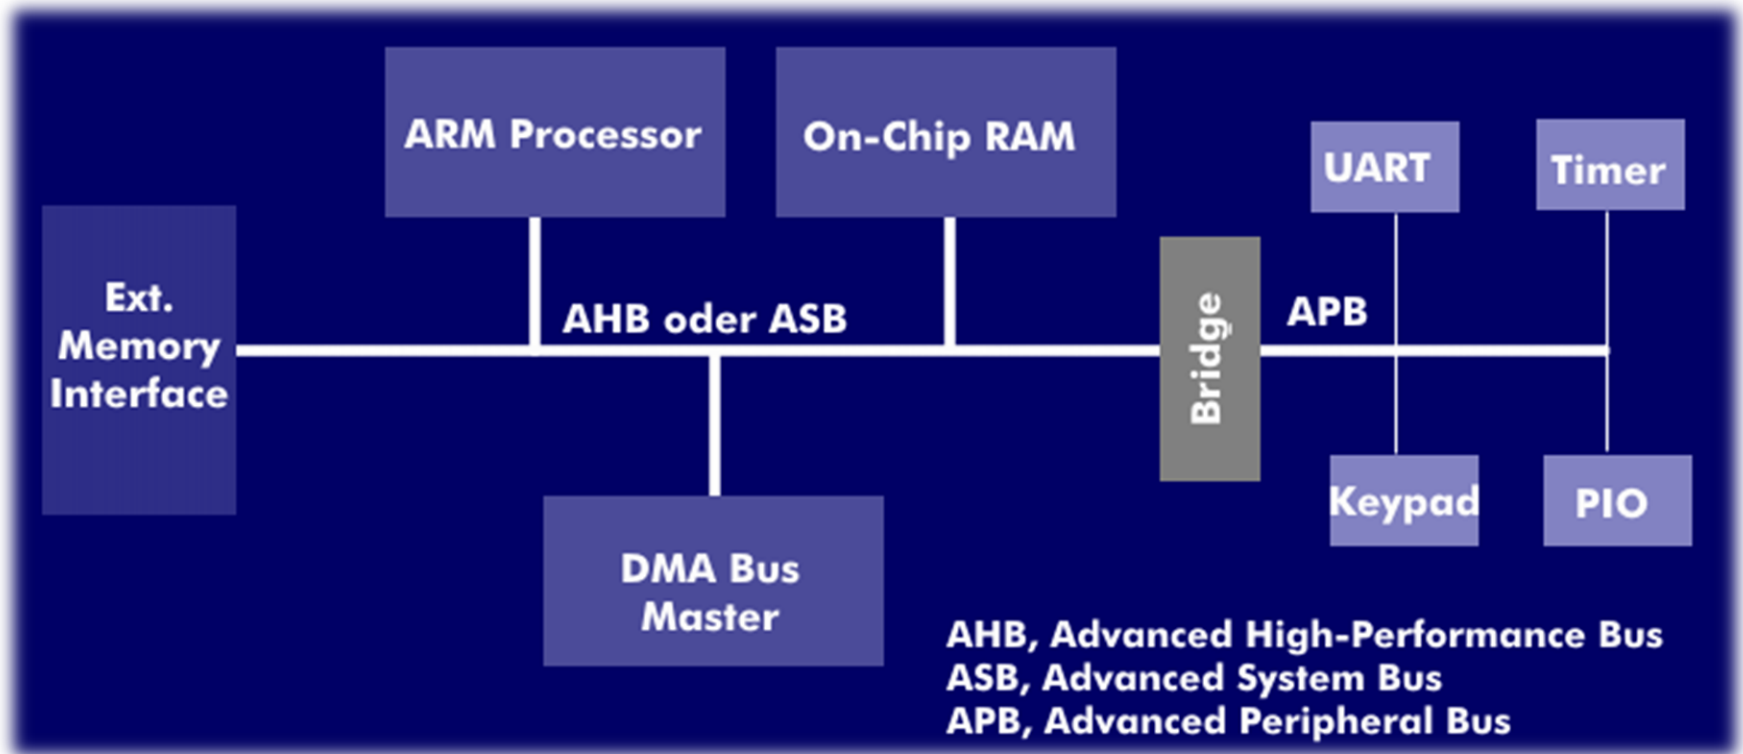


# Sběrnice AHB

- ▶ Advanced High-performance Bus
  - Nástupce ASB (první generace AMBA)
- ▶ Pro velmi rychlou komunikaci mezi:
  - CPU
  - RAM
  - DMA
- ▶ Podpora dávkového přenosu dat
- ▶ Most pro komunikaci s APB


# Sběrnice APB

- ▶ Advanced Peripheral Bus
- ▶ Nabízí jednoduchý interface pro připojení pomalejší a low-power periférií k procesoru
  - Časovače
  - UART (Seriová sběrnice)
  - I<sup>2</sup>C, SPI
- ▶ Periférie komunikují s CPU prostřednictvím mostu mezi AHB a APB

# Blokové schéma STM32

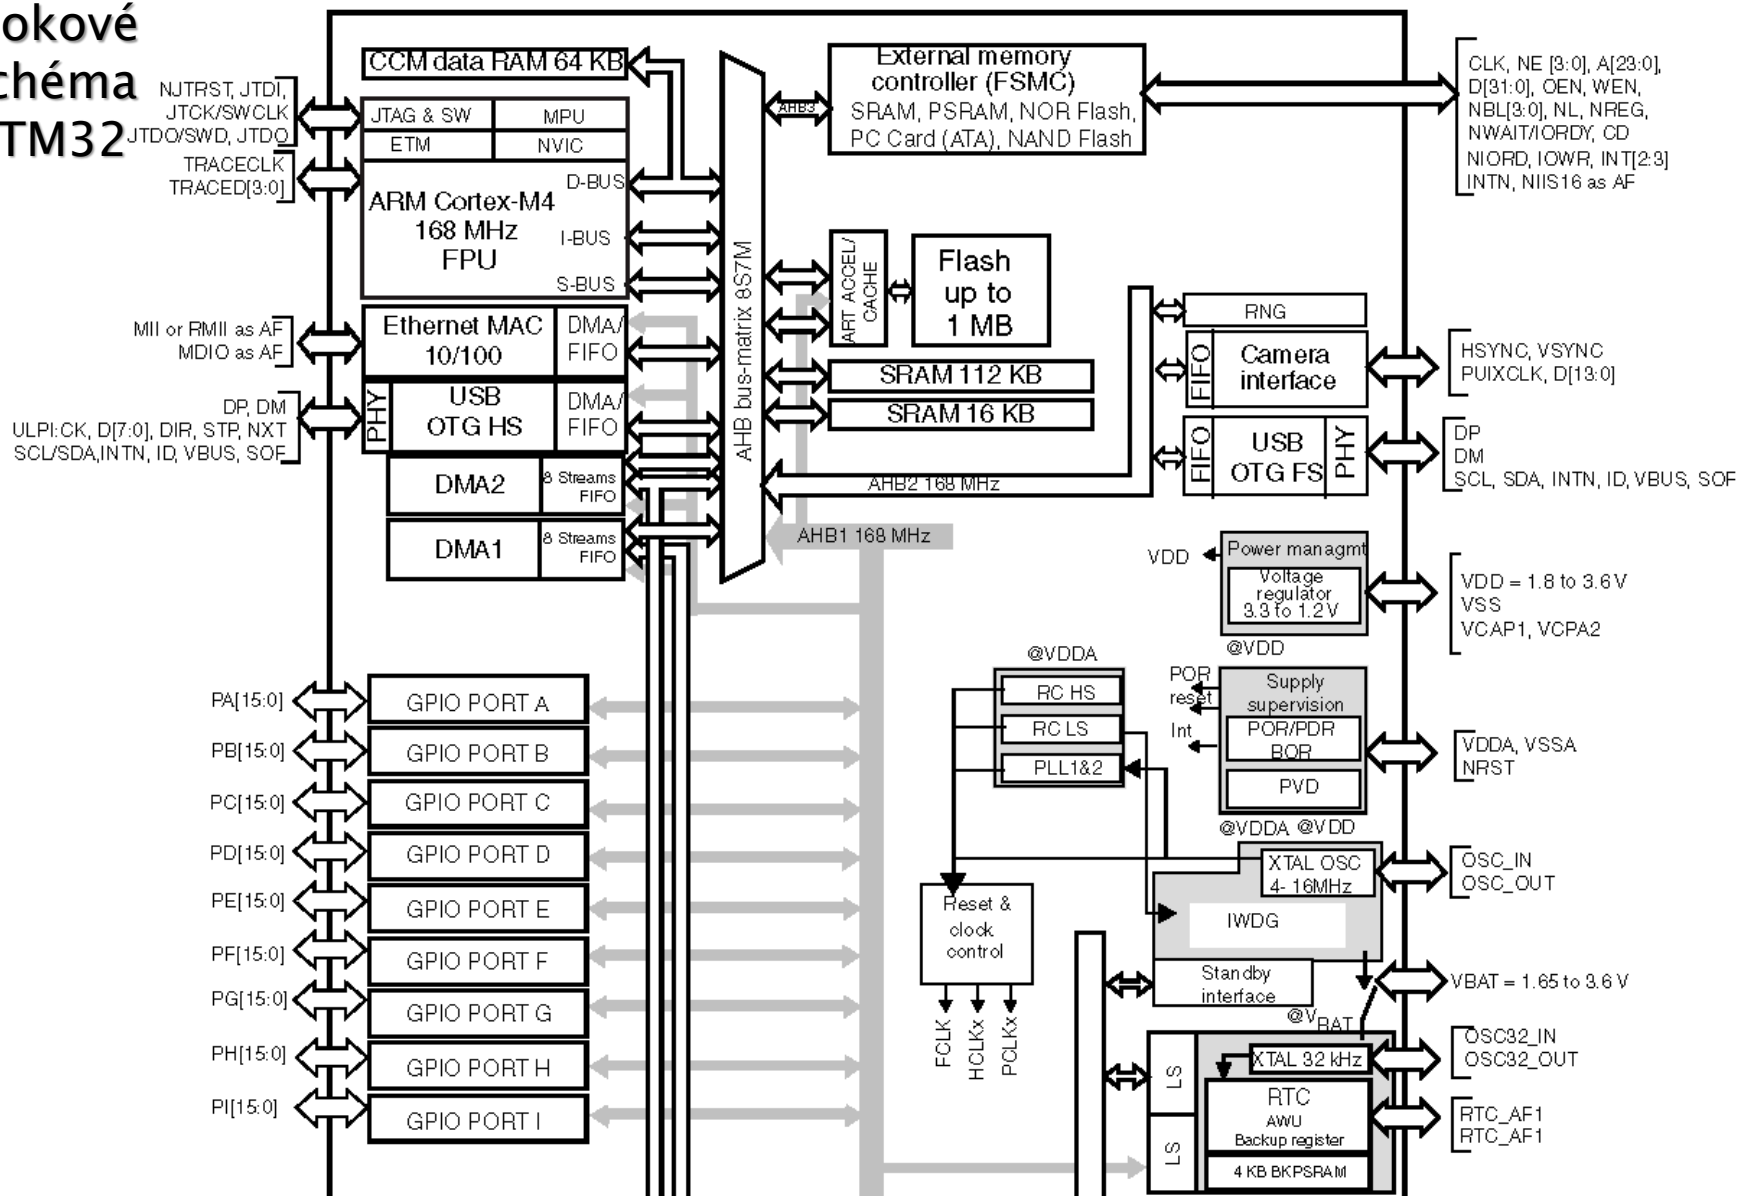

# Blokové schéma STM32

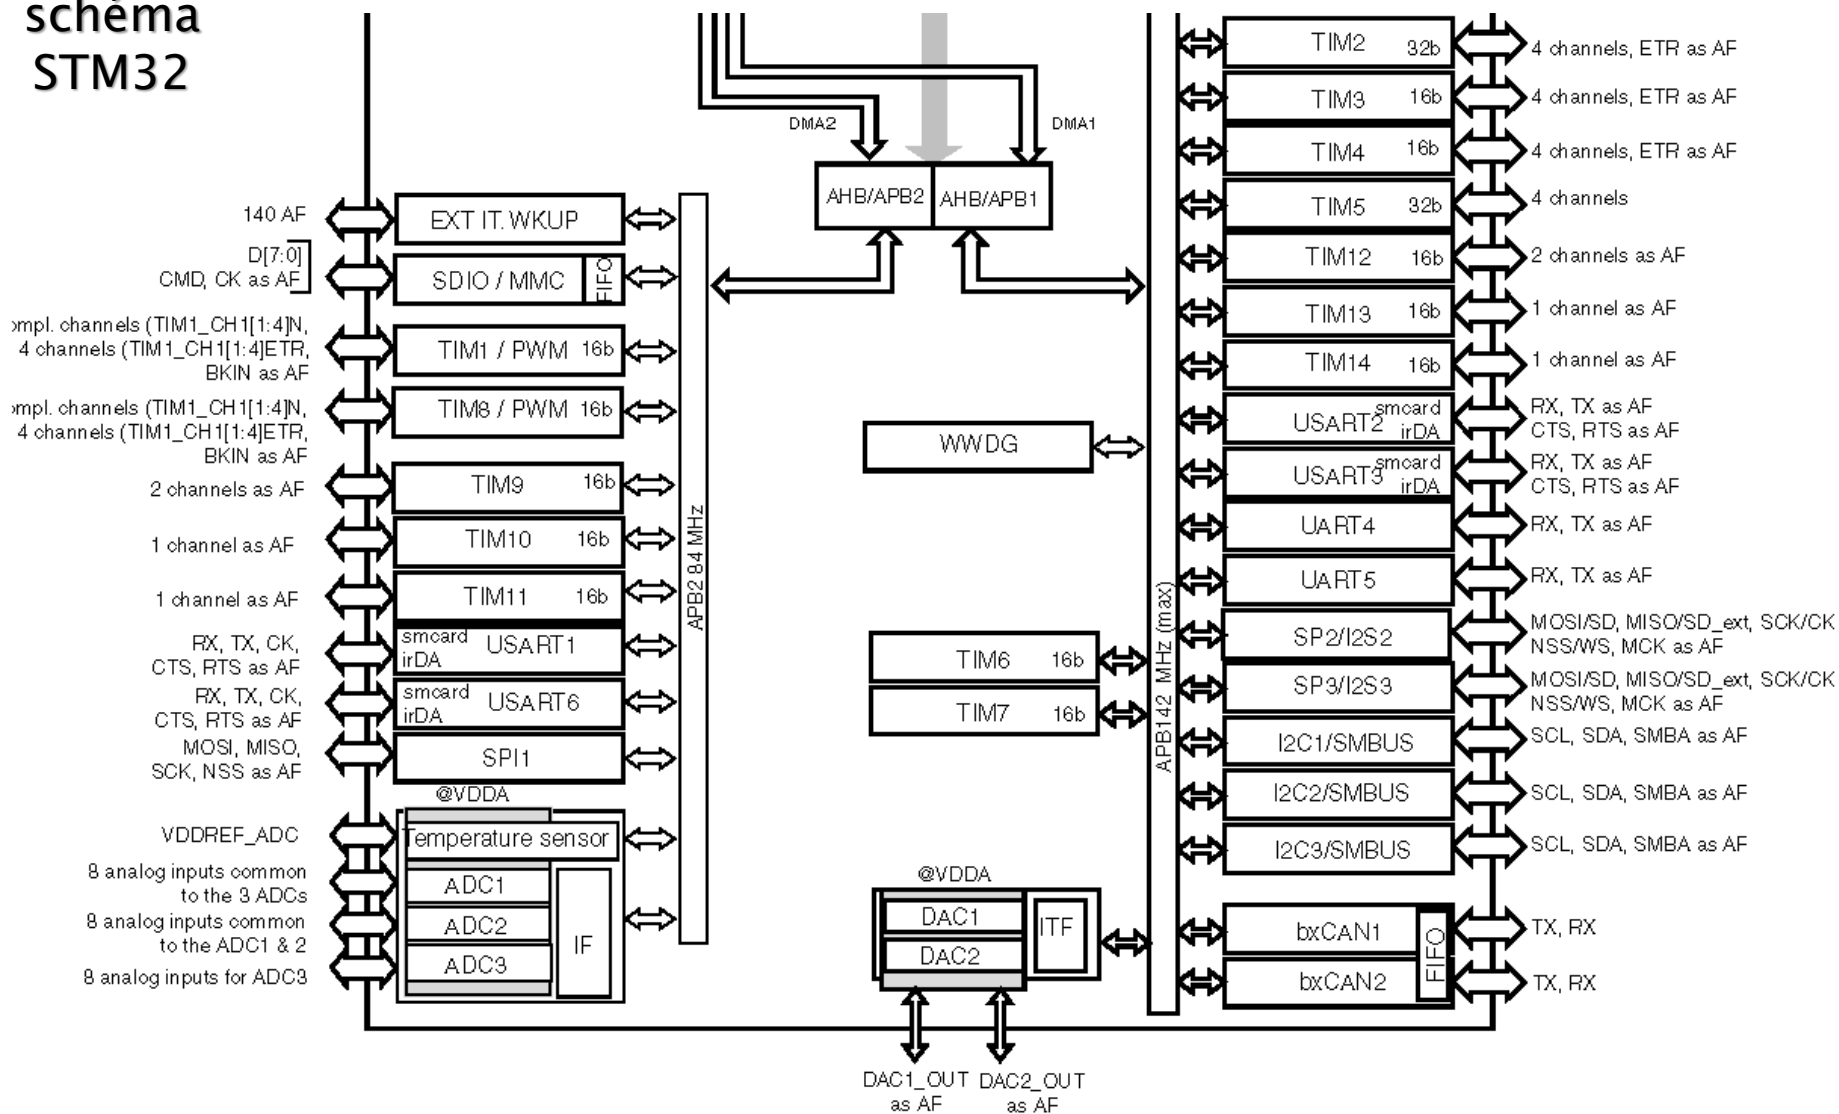

# RCC->AHB1ENR

- Využíváno pro aktivaci příslušného portu

## 7.3.10 RCC AHB1 peripheral clock enable register (RCC\_AHB1ENR)

Address offset: 0x30

Reset value: 0x0010 0000

Access: no wait state, word, half-word and byte access.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Reserved	OTGHS ULPIEN	OTGHS SEN	ETHMACPT PEN	ETHMACRX EN	ETHMACTX EN	ETHMACEN	Reserved			DMA2EN	DMA1EN	CCMDAT ARAMEN	Res.	BKPSR AMEN	Reserved
	rw	rw	rw	rw	rw	rw				rw	rw			rw	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Reserved			CRCE N	Reserved			GPIOIE N	GPIOH EN	GPIOG EN	GPIOFE N	GPIOEEN	GPIOD EN	GPIOC EN	GPIOB EN	GPIOA EN
			rw				rw	rw	rw	rw	rw	rw	rw	rw	rw

# GPIOx->MODER

## 8.4.1 GPIO port mode register (GPIOx\_MODER) (x = A..I/J/K)

Address offset: 0x00

Reset values:

- 0xA800 0000 for port A
- 0x0000 0280 for port B
- 0x0000 0000 for other ports

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
MODER15[1:0]		MODER14[1:0]		MODER13[1:0]		MODER12[1:0]		MODER11[1:0]		MODER10[1:0]		MODER9[1:0]		MODER8[1:0]	
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
MODER7[1:0]		MODER6[1:0]		MODER5[1:0]		MODER4[1:0]		MODER3[1:0]		MODER2[1:0]		MODER1[1:0]		MODER0[1:0]	
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w

Bits 2y:2y+1 **MODERy[1:0]**: Port x configuration bits (y = 0..15)

These bits are written by software to configure the I/O direction mode.

00: Input (reset state)

01: General purpose output mode

10: Alternate function mode

11: Analog mode



# GPIOx->IDR

## 8.4.5 GPIO port input data register (GPIOx\_IDR) (x = A..I/J/K)

Address offset: 0x10

Reset value: 0x0000 XXXX (where X means undefined)

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Reserved															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IDR15	IDR14	IDR13	IDR12	IDR11	IDR10	IDR9	IDR8	IDR7	IDR6	IDR5	IDR4	IDR3	IDR2	IDR1	IDR0
r	r	r	r	r	r	r	r	r	r	r	r	r	r	r	r

Bits 31:16 Reserved, must be kept at reset value.

Bits 15:0 **IDRy**: Port input data (y = 0..15)

These bits are read-only and can be accessed in word mode only. They contain the input value of the corresponding I/O port.

# GPIOx->ODR

## 8.4.6 GPIO port output data register (GPIOx\_ODR) (x = A..I/J/K)

Address offset: 0x14

Reset value: 0x0000 0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Reserved															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ODR15	ODR14	ODR13	ODR12	ODR11	ODR10	ODR9	ODR8	ODR7	ODR6	ODR5	ODR4	ODR3	ODR2	ODR1	ODR0
rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw

Bits 31:16 Reserved, must be kept at reset value.

Bits 15:0 **ODRy**: Port output data (y = 0..15)

These bits can be read and written by software.

*Note: For atomic bit set/reset, the ODR bits can be individually set and reset by writing to the GPIOx\_BSRR register (x = A..I/J/K).*

# GPIOx->BSRR

## 8.4.7 GPIO port bit set/reset register (GPIOx\_BSRR) (x = A..I/J/K)

Address offset: 0x18

Reset value: 0x0000 0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
BR15	BR14	BR13	BR12	BR11	BR10	BR9	BR8	BR7	BR6	BR5	BR4	BR3	BR2	BR1	BR0
w	w	w	w	w	w	w	w	w	w	w	w	w	w	w	w
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
BS15	BS14	BS13	BS12	BS11	BS10	BS9	BS8	BS7	BS6	BS5	BS4	BS3	BS2	BS1	BS0
w	w	w	w	w	w	w	w	w	w	w	w	w	w	w	w

Bits 31:16 **BRy**: Port x reset bit y (y = 0..15)

These bits are write-only and can be accessed in word, half-word or byte mode. A read to these bits returns the value 0x0000.

0: No action on the corresponding ODRx bit

1: Resets the corresponding ODRx bit

*Note: If both BSx and BRx are set, BSx has priority.*

Bits 15:0 **BSy**: Port x set bit y (y= 0..15)

These bits are write-only and can be accessed in word, half-word or byte mode. A read to these bits returns the value 0x0000.

0: No action on the corresponding ODRx bit

1: Sets the corresponding ODRx bit

**KONEC**

# Zdroje

- ▶ <https://www.itwissen.info/AMBA-advanced-microcontroller-bus-architecture.html> [13. 2. 2019]