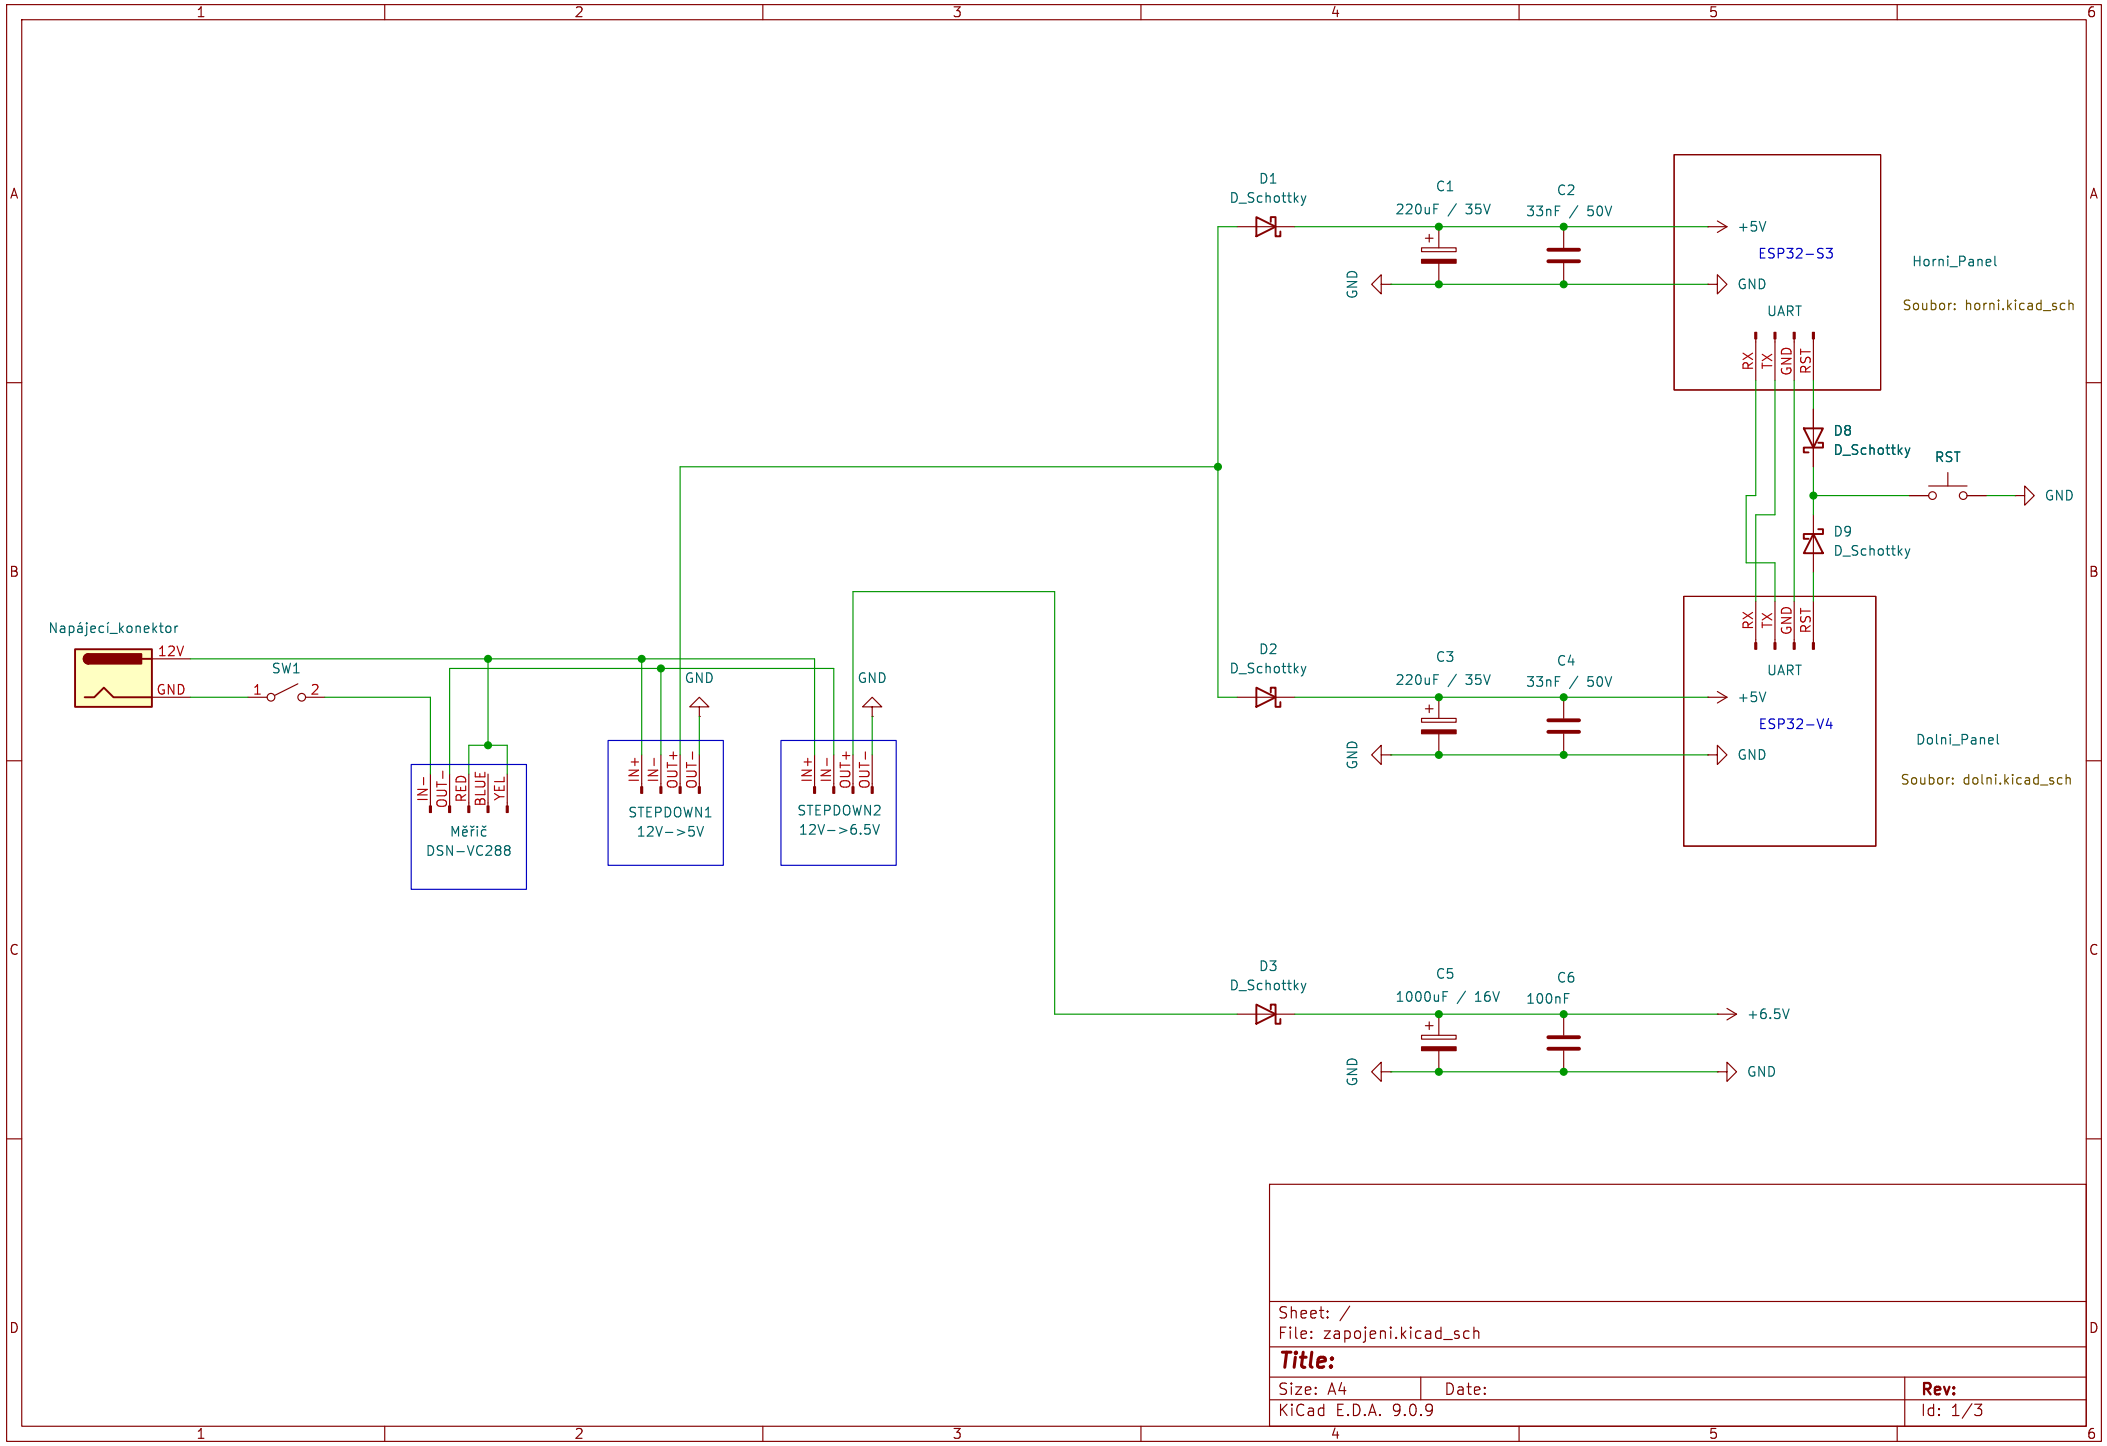
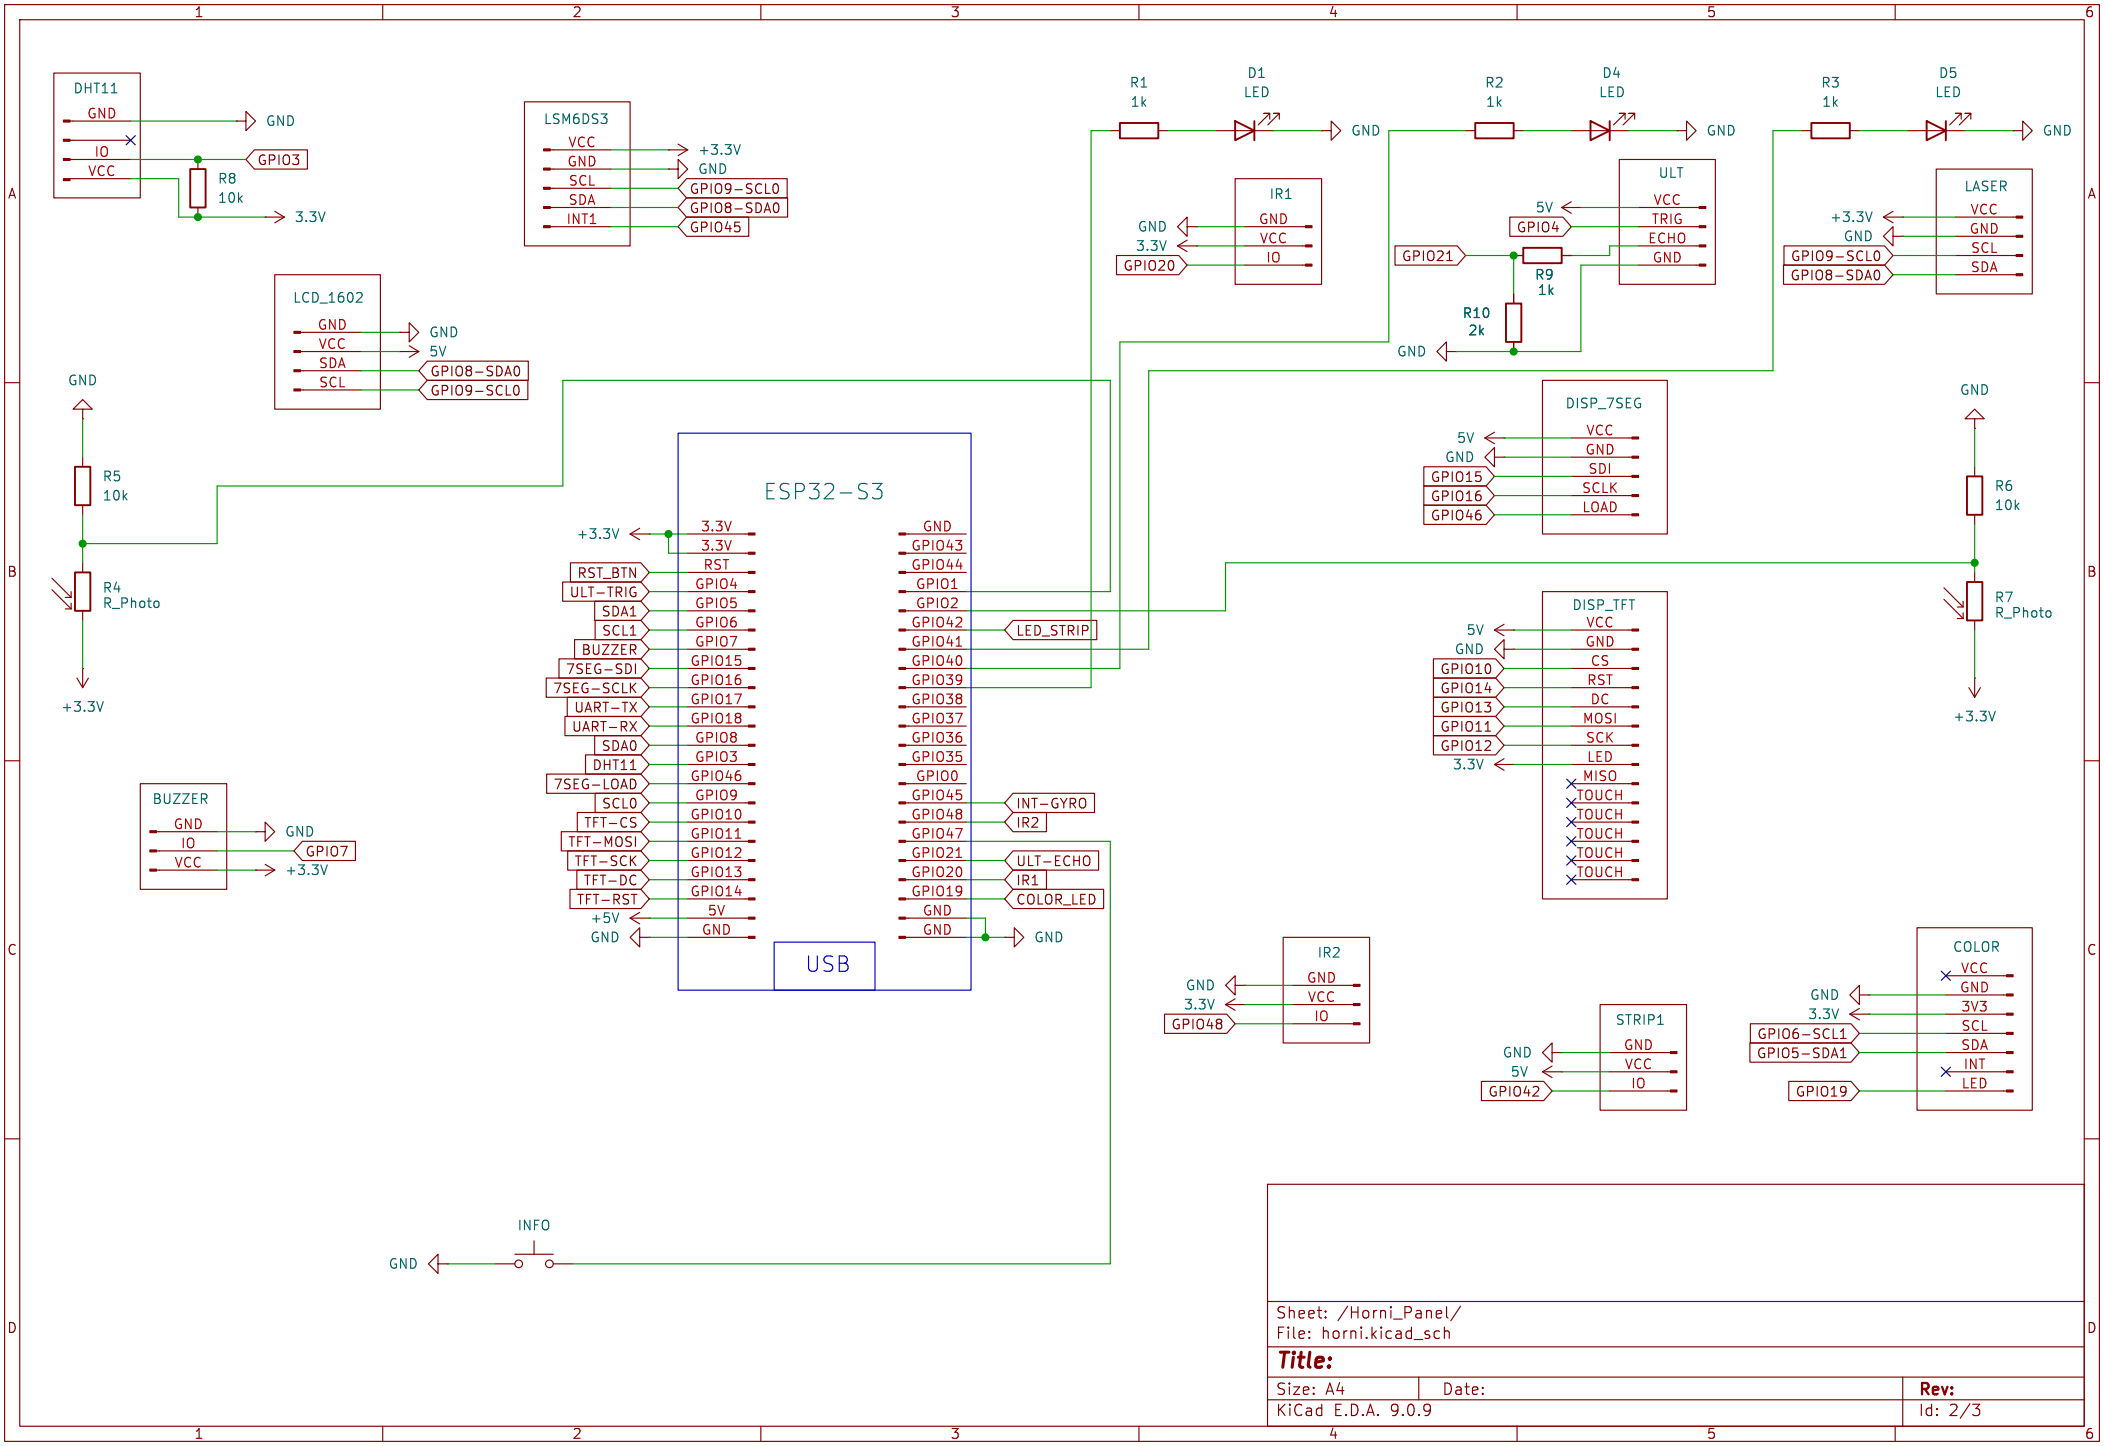
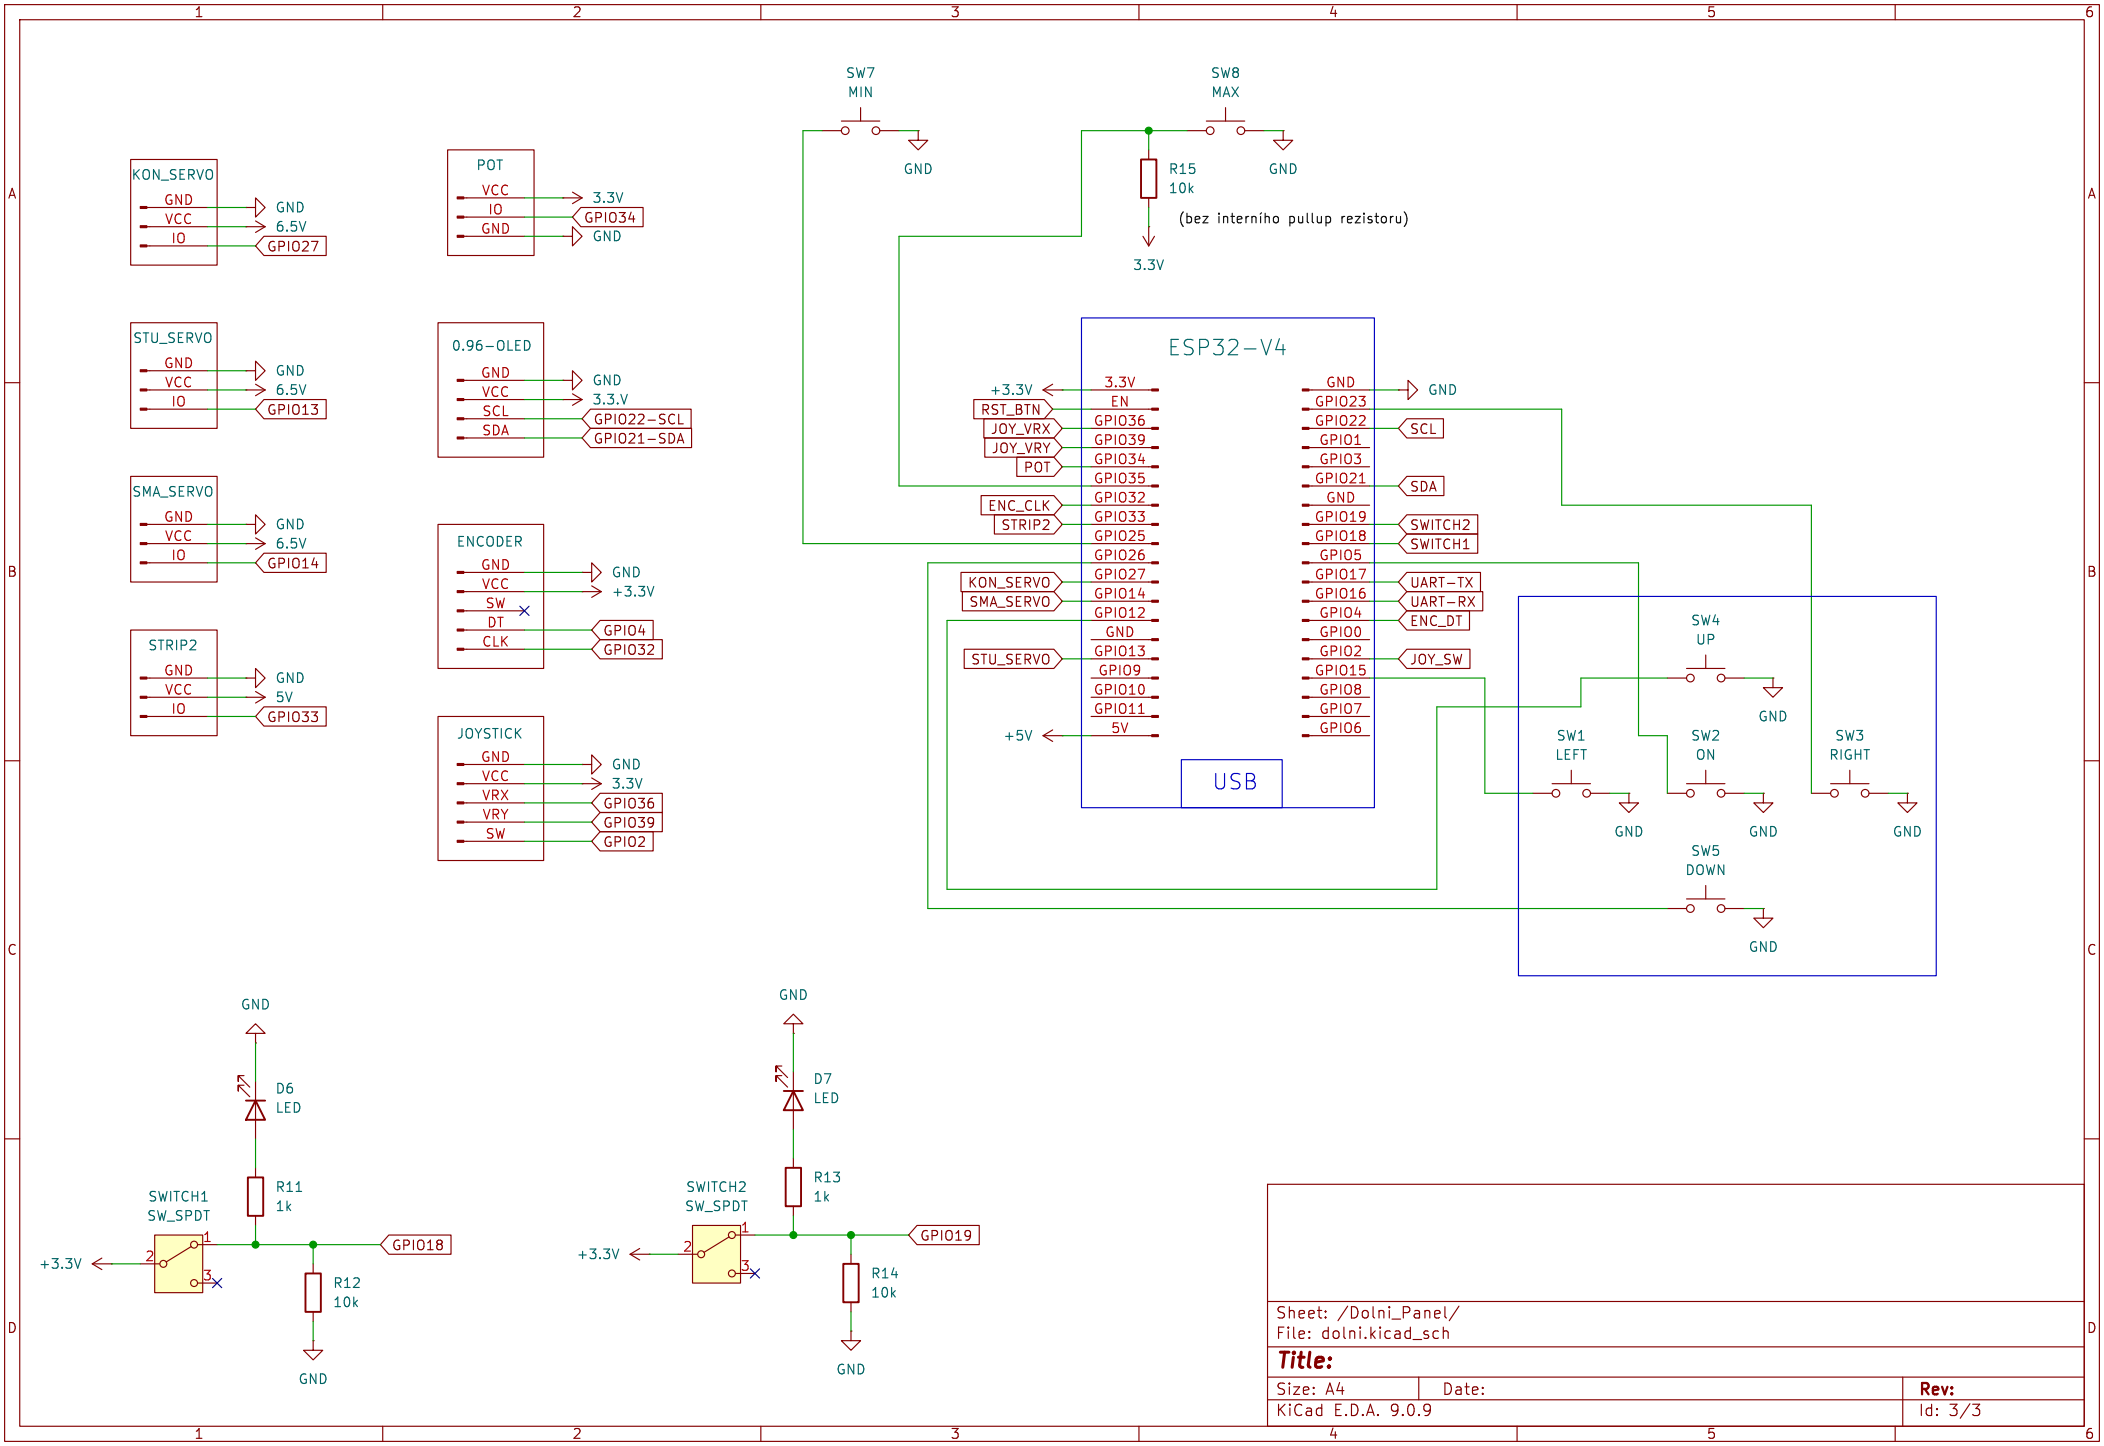

Napájecí_konektor
12V
GND
SW1
1
2
GND
GND
IN−
OUT−
RED
BLUE
YEL
Měřič
DSN−VC288
IN+
IN−
OUT+
OUT−
STEPDOWN1
12V−>5V
IN+
IN−
OUT+
OUT−
STEPDOWN2
12V−>6.5V
D1
D_Schottky
C1
220uF / 35V
C2
33nF / 50V
+5V
ESP32−S3
GND
UART
RX
TX
GND
RST
Horni_Panel
Soubor: horni.kicad_sch
D8
D_Schottky
RST
GND
D9
D_Schottky
D2
D_Schottky
C3
220uF / 35V
C4
33nF / 50V
+5V
ESP32−V4
GND
UART
RX
TX
GND
RST
Dolni_Panel
Soubor: dolni.kicad_sch
D3
D_Schottky
C5
1000uF / 16V
C6
100nF
+6.5V
GND
Sheet: /
File: zapojeni.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 9.0.9
Id: 1/3


DHT11
GND
IO
VCC
GPIO3
R8
10k
3.3V
LSM6DS3
VCC
GND
SCL
SDA
INT1
+3.3V
GND
GPIO9-SCL0
GPIO8-SDA0
GPIO45
R1
1k
D1
LED
GND
IR1
GND
VCC
IO
3.3V
GPIO20
R2
1k
D4
LED
GND
ULT
VCC
TRIG
ECHO
GND
5V
GPIO4
GPIO21
R9
1k
R10
2k
GND
R3
1k
D5
LED
GND
LASER
VCC
GND
SCL
SDA
+3.3V
GND
GPIO9-SCL0
GPIO8-SDA0
LCD_1602
GND
VCC
SDA
SCL
GND
5V
GPIO8-SDA0
GPIO9-SCL0
GND
R5
10k
R4
R_Photo
+3.3V
ESP32-S3
3.3V
3.3V
RST
GPIO4
GPIO5
GPIO6
GPIO7
GPIO15
GPIO16
GPIO17
GPIO18
GPIO8
GPIO3
GPIO46
GPIO9
GPIO10
GPIO11
GPIO12
GPIO13
GPIO14
5V
GND
GND
GPIO43
GPIO44
GPIO1
GPIO2
GPIO42
GPIO41
GPIO40
GPIO39
GPIO38
GPIO37
GPIO36
GPIO35
GPIO0
GPIO45
GPIO48
GPIO47
GPIO21
GPIO20
GPIO19
GND
GND
+3.3V
RST_BTN
ULT-TRIG
SDA1
SCL1
BUZZER
7SEG-SDI
7SEG-SCLK
UART-TX
UART-RX
SDA0
DHT11
7SEG-LOAD
SCL0
TFT-CS
TFT-MOSI
TFT-SCK
TFT-DC
TFT-RST
+5V
GND
LED_STRIP
INT-GYRO
IR2
ULT-ECHO
IR1
COLOR_LED
GND
USB
DISP_7SEG
VCC
GND
SDI
SCLK
LOAD
5V
GND
GPIO15
GPIO16
GPIO46
GND
R6
10k
R7
R_Photo
+3.3V
DISP_TFT
VCC
GND
CS
RST
DC
MOSI
SCK
LED
MISO
TOUCH
TOUCH
TOUCH
TOUCH
TOUCH
5V
GND
GPIO10
GPIO14
GPIO13
GPIO11
GPIO12
3.3V
BUZZER
GND
IO
VCC
GND
GPIO7
+3.3V
IR2
GND
VCC
IO
GND
3.3V
GPIO48
STRIP1
GND
VCC
IO
GND
5V
GPIO42
COLOR
VCC
GND
3V3
SCL
SDA
INT
LED
GND
3.3V
GPIO6-SCL1
GPIO5-SDA1
GPIO19
INFO
GND
Sheet: /Horni_Panel/
File: horni.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 9.0.9
Id: 2/3


KON_SERVO
GND
VCC
IO
GND
6.5V
GPIO27
STU_SERVO
GND
VCC
IO
GND
6.5V
GPIO13
SMA_SERVO
GND
VCC
IO
GND
6.5V
GPIO14
STRIP2
GND
VCC
IO
GND
5V
GPIO33
POT
VCC
IO
GND
3.3V
GPIO34
GND
0.96-OLED
GND
VCC
SCL
SDA
GND
3.3.V
GPIO22-SCL
GPIO21-SDA
ENCODER
GND
VCC
SW
DT
CLK
GND
+3.3V
GPIO4
GPIO32
JOYSTICK
GND
VCC
VRX
VRY
SW
GND
3.3V
GPIO36
GPIO39
GPIO2
SW7
MIN
GND
SW8
MAX
R15
10k
GND
(bez interního pullup rezistoru)
3.3V
ESP32-V4
3.3V
EN
GPIO36
GPIO39
GPIO34
GPIO35
GPIO32
GPIO33
GPIO25
GPIO26
GPIO27
GPIO14
GPIO12
GND
GPIO13
GPIO9
GPIO10
GPIO11
5V
GND
GPIO23
GPIO22
GPIO1
GPIO3
GPIO21
GND
GPIO19
GPIO18
GPIO5
GPIO17
GPIO16
GPIO4
GPIO0
GPIO2
GPIO15
GPIO8
GPIO7
GPIO6
USB
+3.3V
RST_BTN
JOY_VRX
JOY_VRY
POT
ENC_CLK
STRIP2
KON_SERVO
SMA_SERVO
STU_SERVO
+5V
SCL
SDA
SWITCH2
SWITCH1
UART-TX
UART-RX
ENC_DT
JOY_SW
SW4
UP
SW1
LEFT
SW2
ON
SW3
RIGHT
SW5
DOWN
GND
GND
GND
GND
GND
GND
GND
GND
GND
GND
GND
GND
GND
D6
LED
R11
1k
SWITCH1
SW_SPDT
+3.3V
GPIO18
R12
10k
GND
GND
D7
LED
R13
1k
SWITCH2
SW_SPDT
+3.3V
GPIO19
R14
10k
GND
Sheet: /Dolni_Panel/
File: dolni.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 9.0.9
Id: 3/3