



BUILD DIAGRAM

SMD Reflow

Hand Soldered



Check out the docs here



Program your macro_GOAT and make it your own

1 WS2812B (rgb LED)

Ground Pin (white/cut corner) goes to the top left



3 Electrolytic Cap

Black stripe marks negative side.

Shape of the footprint also shows orientation



Prototyping Area & Breakout GPIOs

Go crazy and add your favorite Input- or Output components here.


Joysticks, sensors, screens, MORE LEDs

GPIO pads expose 3.3v, 5v, ADC and other serial ports

4 RP2040 zero

Buttons & onboard LED face up


Use pins to position. Solder pads on opposite side. Remove pins. Solder rest

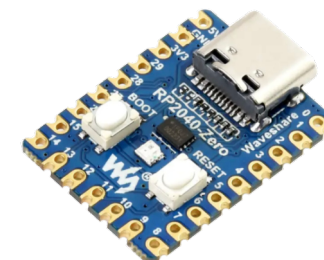

2 LL4148 Diode

Black stripe marks cathode / blocking side.

Align with symbols as in diagram (black stripe to the right)




5 EC11 Rotary Encoder

0-4 Rotary Encoders

Remove chunky mounting pins with wire cutters.

Bend pins in place if needed

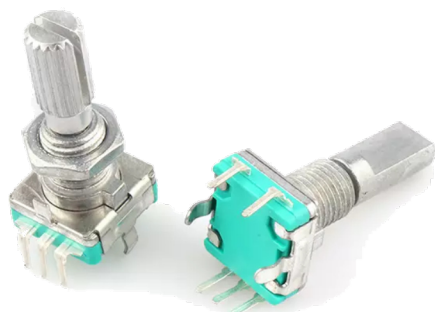

6 Cherry MX blue

4-8 Switches

Have a bit of wiggle room. Solder one pin. Correct position. Solder second pin.

