



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SPECIFICATIONS AND DOCUMENTS:  
1.1. INDICATOR CONSTRUCTION SHALL BE IAW OH-SPEC-001, INDICATOR TYPE A, METHOD 1.  
1.2. ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
2. ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS.  
ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING MANUFACTURING FILES:  
2.1. FLAT PARTS: <MATERIAL>\_<MATERIAL COLOR, IF APPLICABLE>\_<THICKNESS, IN DECIMAL INCHES>\_<PN>\_<REV>\_v<VERSION NUMBER OF MODEL>.SVG  
2.2. FDM 3D PRINTED PARTS: FDM\_<PN>\_<REV>\_v<VERSION # OF MODEL>.3MF  
2.3. RESIN 3D PRINTED PARTS: RESIN\_<PN>\_<REV>\_v<VERSION # OF MODEL>.3MF

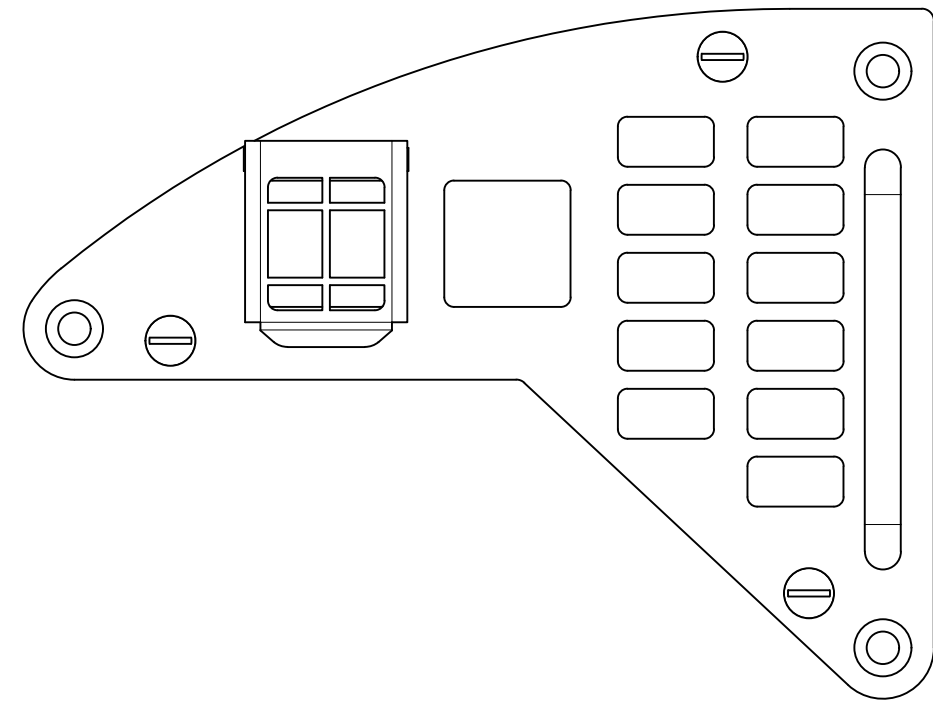


-1 ASSY  
FRONT VIEW

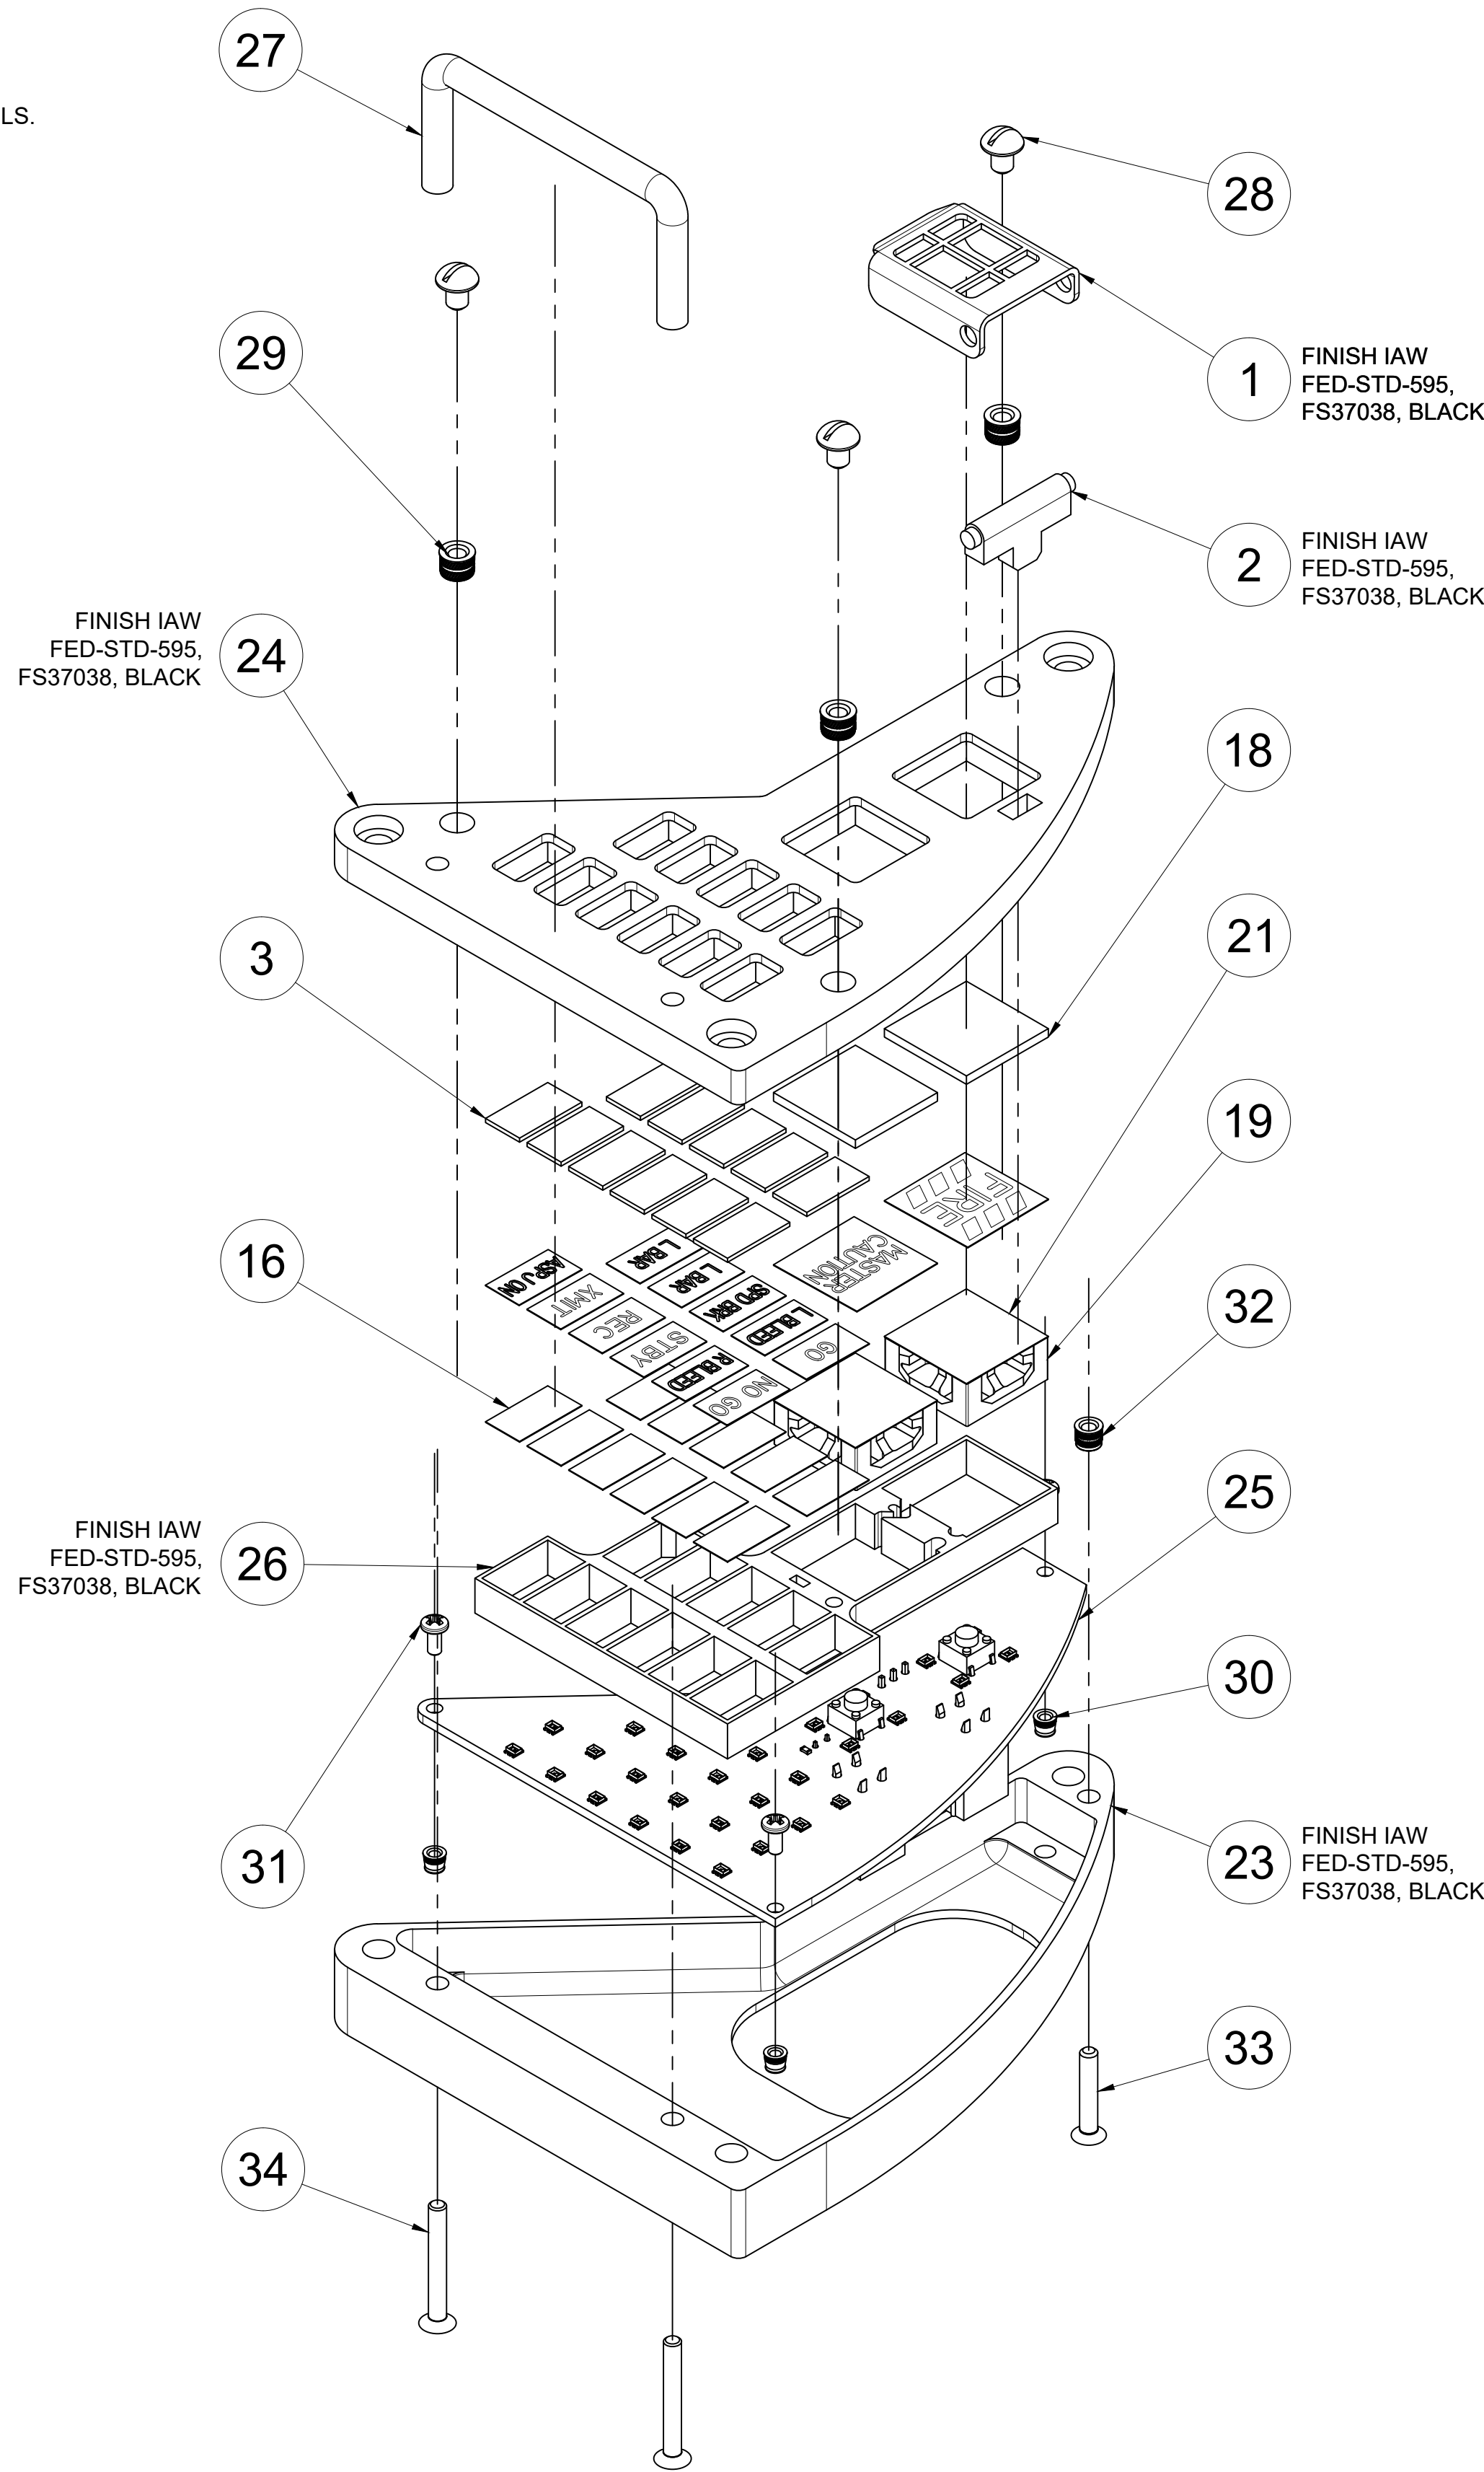

-1 ASSY  
SCALE 1.5:1

34	2	93085A116	FHS, 100DEG, #4-40 X .875, 18-8	SS
33	1	90471A427	FHS, 100DEG, #4-40 X .625, STEEL	STL
32	1	93365A120	INSERT, 4-40, BRASS, FOR PLASTICS	BRS
31	3	94070A076	PHS, #2-56 X .1875, BRASS	BRS
30	3	93365A110	INSERT, 2-56, BRASS, FOR PLASTIC	BRS
29	3	93365A130	INSERT, 6-32, BRASS, FOR PLASTIC	BRS
28	3	90276A143	RHS, SLOTTED, 6-32 X .1875, STEEL	STEEL
27	1	1568A640	HANDLE, 4-40 FEMALE X 2.0 CENTERS X 1.0 PROTRUSION, ALUM, ANODIZED BLK	ALU
26	1	OH1A5-12	EWI LIGHT CHANNELS - RIGHT	PETG
25	1	OH1A4-34	PCB, EWI_V3_LEFT	N/A
24	1	OH1A4-33	MIRROREWI LEGEND PLATE - RIGHT	PETG
23	1	OH1A4-32	MIRROREWI CHASSIS - RIGHT	PETG
22	1	OH1A5-20	EYEBROW WARNING LARGE LEGEND, FIRE	ACRL
21	1	OH1A5-21	EYEBROW WARNING LARGE LEGEND DIFFUSER	ACRL
20	1	OH1A4-29	EYEBROW WARNING LARGE LEGEND DIFFUSER (1)	ACRL
19	2	OH1A5-22	PUSHBUTTON INDICATOR STANDOFF	RESN
18	2	OH1A5-19	EYEBROW WARNING LARGE LEGEND COVER	ACRL
17	1	OH1A4-26	EYEBROW WARNING LARGE LEGEND, MASTER CAUTION	RMRK
16	2	OH1A4-25	EYEBROW WARNING SMALL LEGEND DIFFUSER (2)	ACRL
15	3	OH1A4-24	EYEBROW WARNING SMALL LEGEND DIFFUSER (1)	ACRL
14	6	OH1A5-18	EYEBROW WARNING SMALL LEGEND DIFFUSER	ACRL
13	2	OH1A4-22	EYEBROW WARNING SMALL LEGEND, L BAR	ACRL
12	1	OH1A4-21	EYEBROW WARNING SMALL LEGEND, L BLEED	ACRL
11	1	OH1A4-20	EYEBROW WARNING SMALL LEGEND, NO GO	ACRL
10	1	OH1A4-19	EYEBROW WARNING SMALL LEGEND, SPD BRK	ACRL
9	1	OH1A4-18	EYEBROW WARNING SMALL LEGEND, ASPJ ON	ACRL
8	1	OH1A4-17	EYEBROW WARNING SMALL LEGEND, GO	ACRL
7	1	OH1A4-16	EYEBROW WARNING SMALL LEGEND, REC	ACRL
6	1	OH1A4-15	EYEBROW WARNING SMALL LEGEND, XMIT	ACRL
5	1	OH1A4-14	EYEBROW WARNING SMALL LEGEND, R BLEED	ACRL
4	1	OH1A4-13	EYEBROW WARNING SMALL LEGEND, STBY	ACRL
3	11	OH1A5-16	EYEBROW WARNING SMALL LEGEND COVER	ACRL
2	1	OH1A5-14	EWI FIRE FINGER GUARD MOUNTING BLOCK	RESN
1	1	OH1A5-13	EWI FIRE FINGER GUARD	RESN

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				
UNLESS OTHERWISE SPECIFIED:		UOS INCH TOLERANCES ARE:		<div><div><div>OPEN</div><div>HORNET</div><div><a href="https://www.OpenHornet.com">https://www.OpenHornet.com</a></div></div></div>
DIMENSIONS ARE IN INCHES.		DECIMALS: ANGLES:		
DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS.		.X ± .1 MACHINED ± .5°		
INTERPRET DRAWING IAW ASME Y14.100-2017.		.XX ± .03 LOCATING ± .5°		
INTERPRET DIM AND TOL IAW ASME Y14.5-2009.		.XXX ± .010 FORMED ± 2°		
REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX.		CHAMFERS ± .5°		
DIMENSIONS APPLY BEFORE FINISH.		DRILLED HOLE DIAMETERS:		
		.0135 - .125: +.004/- .001		
		.126 - .250: +.005/- .001		
		.251 - .500: +.006/- .001		
		.501 - .750: +.008/- .001		
		.751 - 1.000: +.010/- .001		
		1.001 - 2.000: +.012/- .001		
DESIGNED J. STEENSEN 04/01/2023		SIZE DWG NO		REV
CHECKED J. STEENSEN 04/02/2023		D OH1A4-1		-
DRAWN J. STEENSEN 04/01/2023		SCALE 1:1		DO NOT SCALE DWG
		SHEET 1/2		

