


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SPECIFICATIONS AND DOCUMENTS:
1.1. ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
2. ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS.
ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING
MANUFACTURING FILES:
2.1. DECALS: <PN>_<DESCRIPTION>_<REV>_V<VERSION # OF MODEL>.PDF

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	5/4/2023	

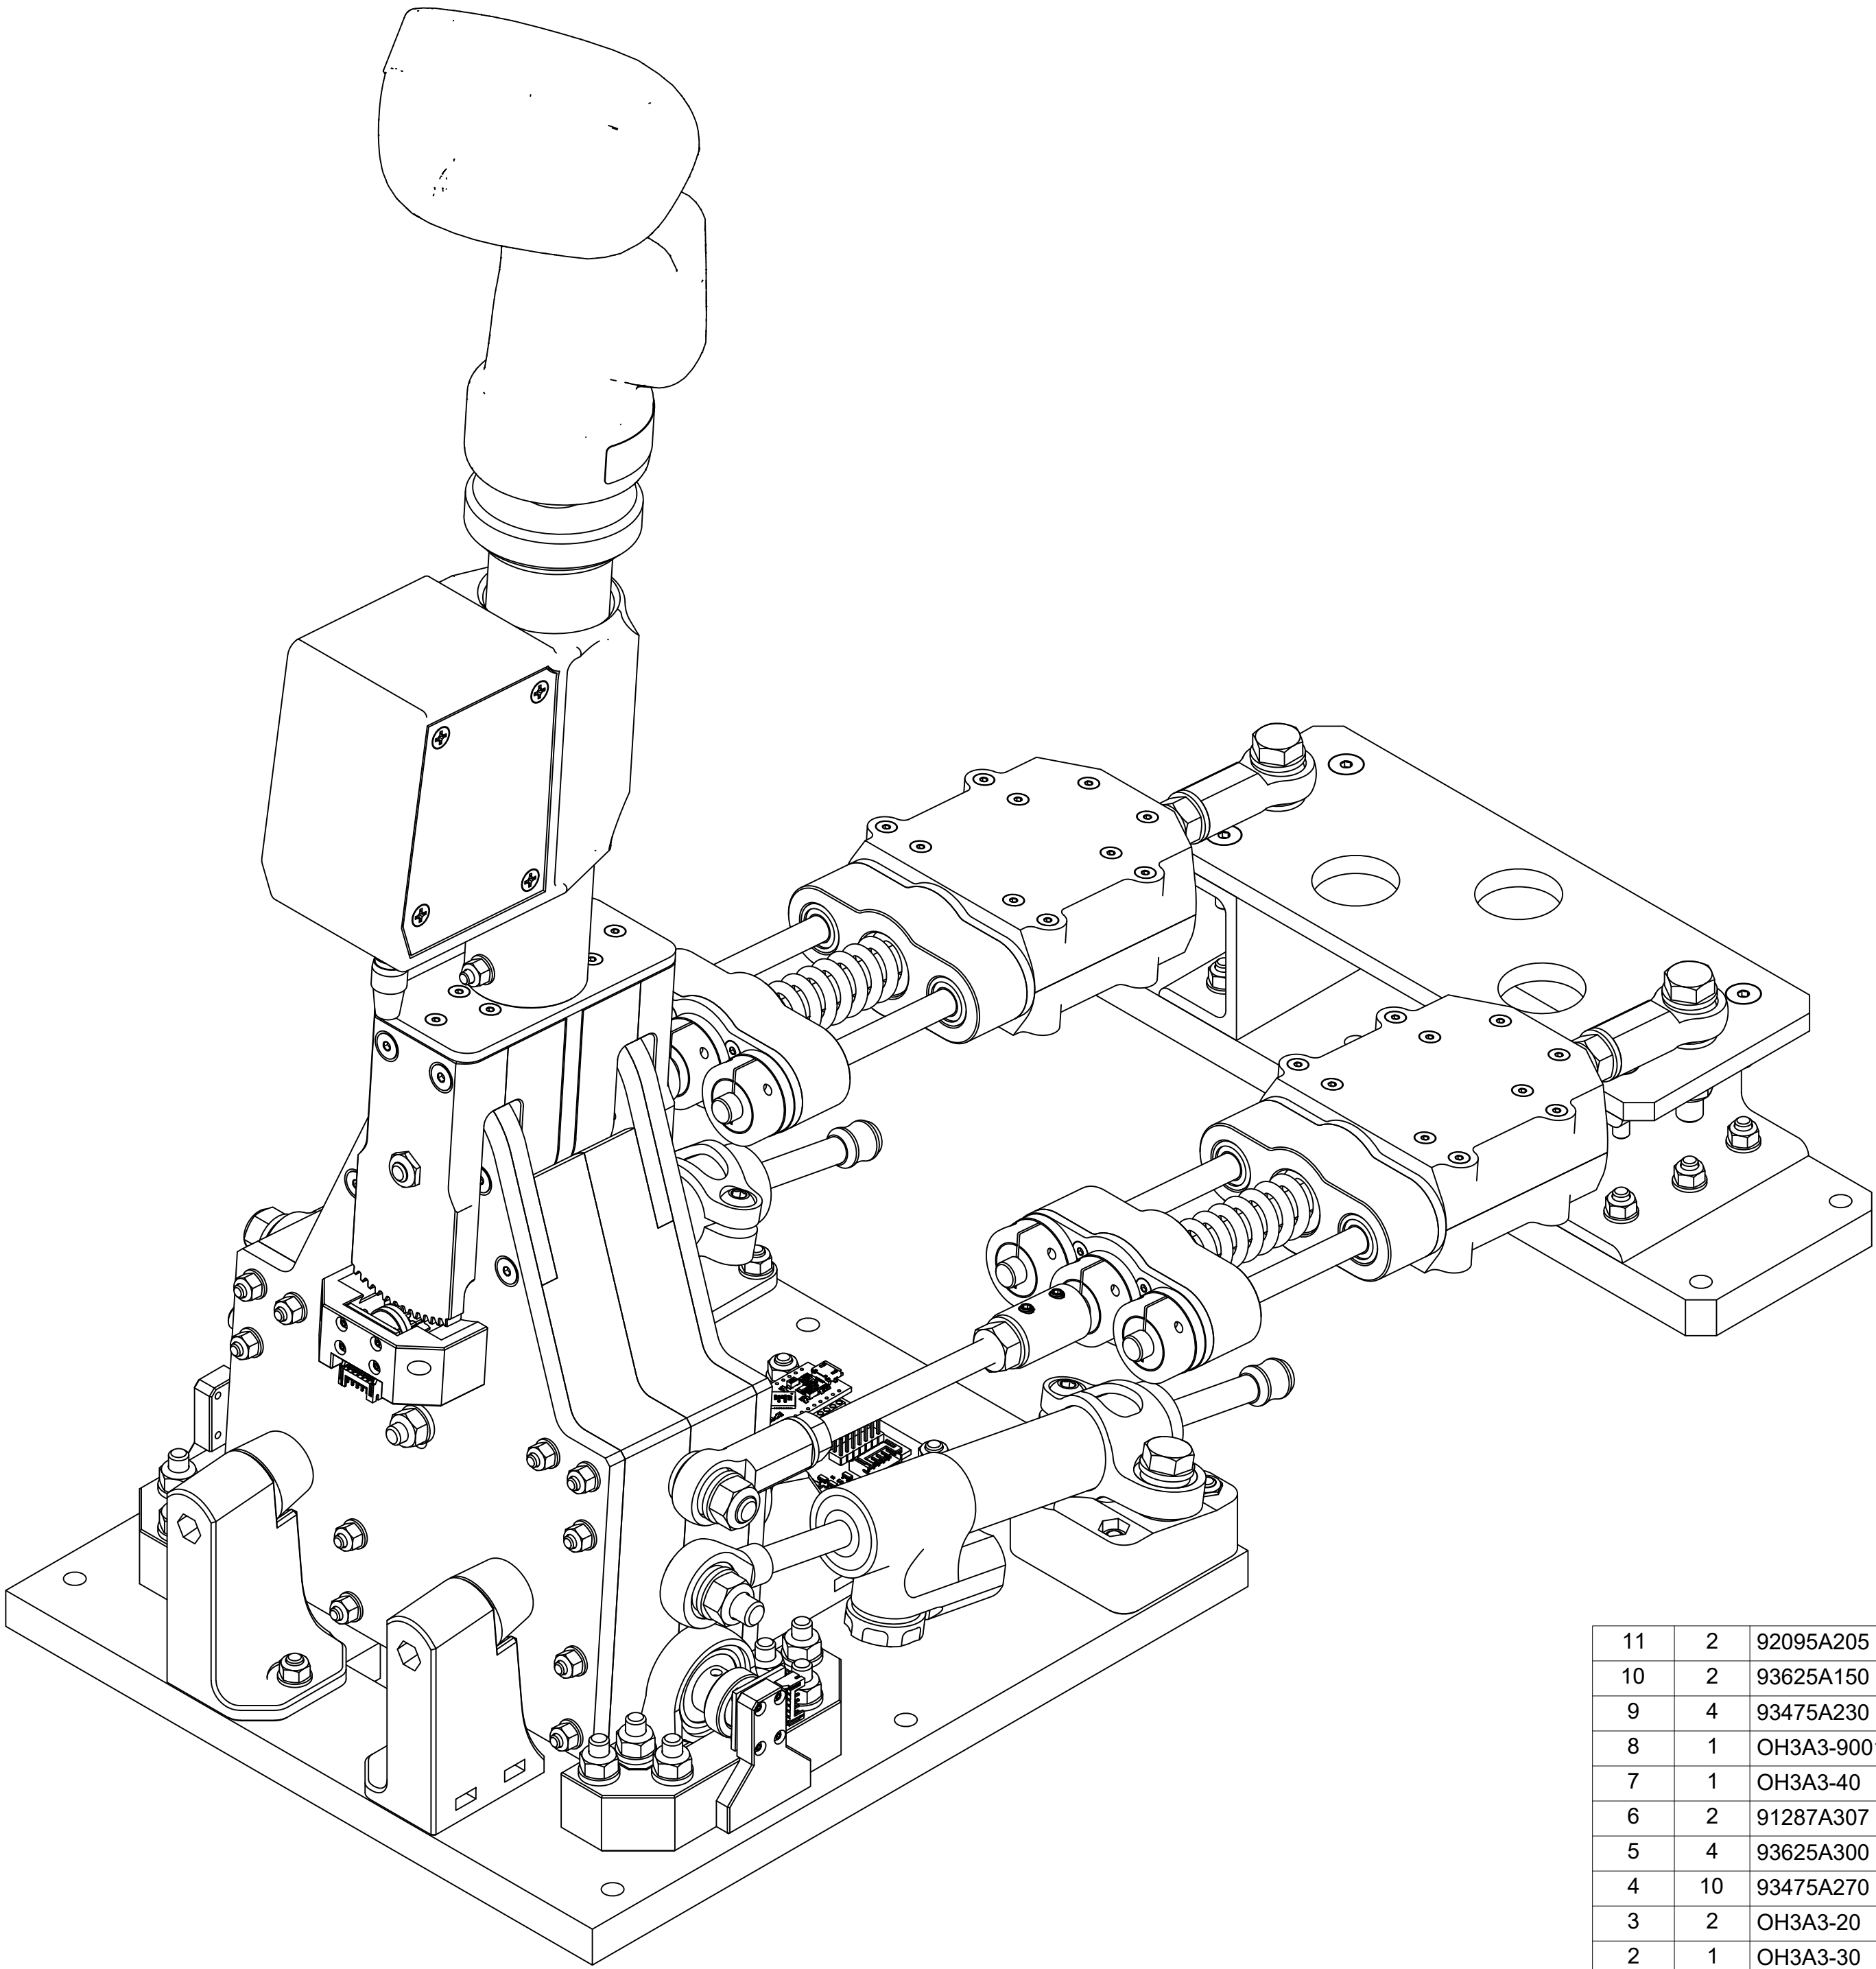


-1 ASSY

11	2	92095A205	BHCS, M4 X 0.7 MM THREAD, 45MM LONG	SS
10	2	93625A150	NYLOC HEX NUT, M4 X 0.7 MM	SS
9	4	93475A230	FLAT WASHER, M4	SS
8	1	OH3A3-9001	DECAL, GRIP ASSY	VYNL
7	1	OH3A3-40	ASSY, STICK EXTENSION	
6	2	91287A307	HHS, M8 X 1.25 MM THREAD, 45 MM LONG	SS
5	4	93625A300	NYLOC HEX NUT, M8 X 1.25MM	SS
4	10	93475A270	93475A270 - FLAT WASHER, M8	SS
3	2	OH3A3-20	ASSY, SSDCT	
2	1	OH3A3-30	ASSY, STATIC SSDCT ANCHOR	
1	1	OH3A3-10	ASSY, STICK PITCH AXIS	
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL


UNLESS OTHERWISE SPECIFIED:			UOS INCH TOLERANCES ARE:		
DIMENSIONS ARE IN INCHES.			DECIMALS:		
DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS.			ANGLES:		
INTERPRET DRAWING IAW ASME Y14.100-2017.			.X ± .1		
INTERPRET DIM AND TOL IAW ASME Y14.5-2009.			.XX ± .03		
REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX.			.XXX ± .010		
DIMENSIONS APPLY BEFORE FINISH.			CHAMFERS ± 5°		
			DRILLED HOLE DIAMETERS:		
			.0135 - .125: +.004/- .001		
			.126 - .250: +.005/- .001		
			.251 - .500: +.006/- .001		
			.501 - .750: +.008/- .001		
			.751 - 1.000: +.010/- .001		
			1.001 - 2.000: +.012/- .001		
DESIGNED E. SCOTT 05/05/2023					
CHECKED					
DRAWN J. STEENSEN 05/05/2023					
			TITLE		
			ASSY, FLIGHT CONTROL STICK		
			CENTER TUB		
			SIZE D DWG NO OH3A3-1 REV -		
			SCALE 1:1.5 DO NOT SCALE DWG SHEET 1/2		



TITLE
ASSY, FLIGHT
CONTROL STICK
CENTER TUB

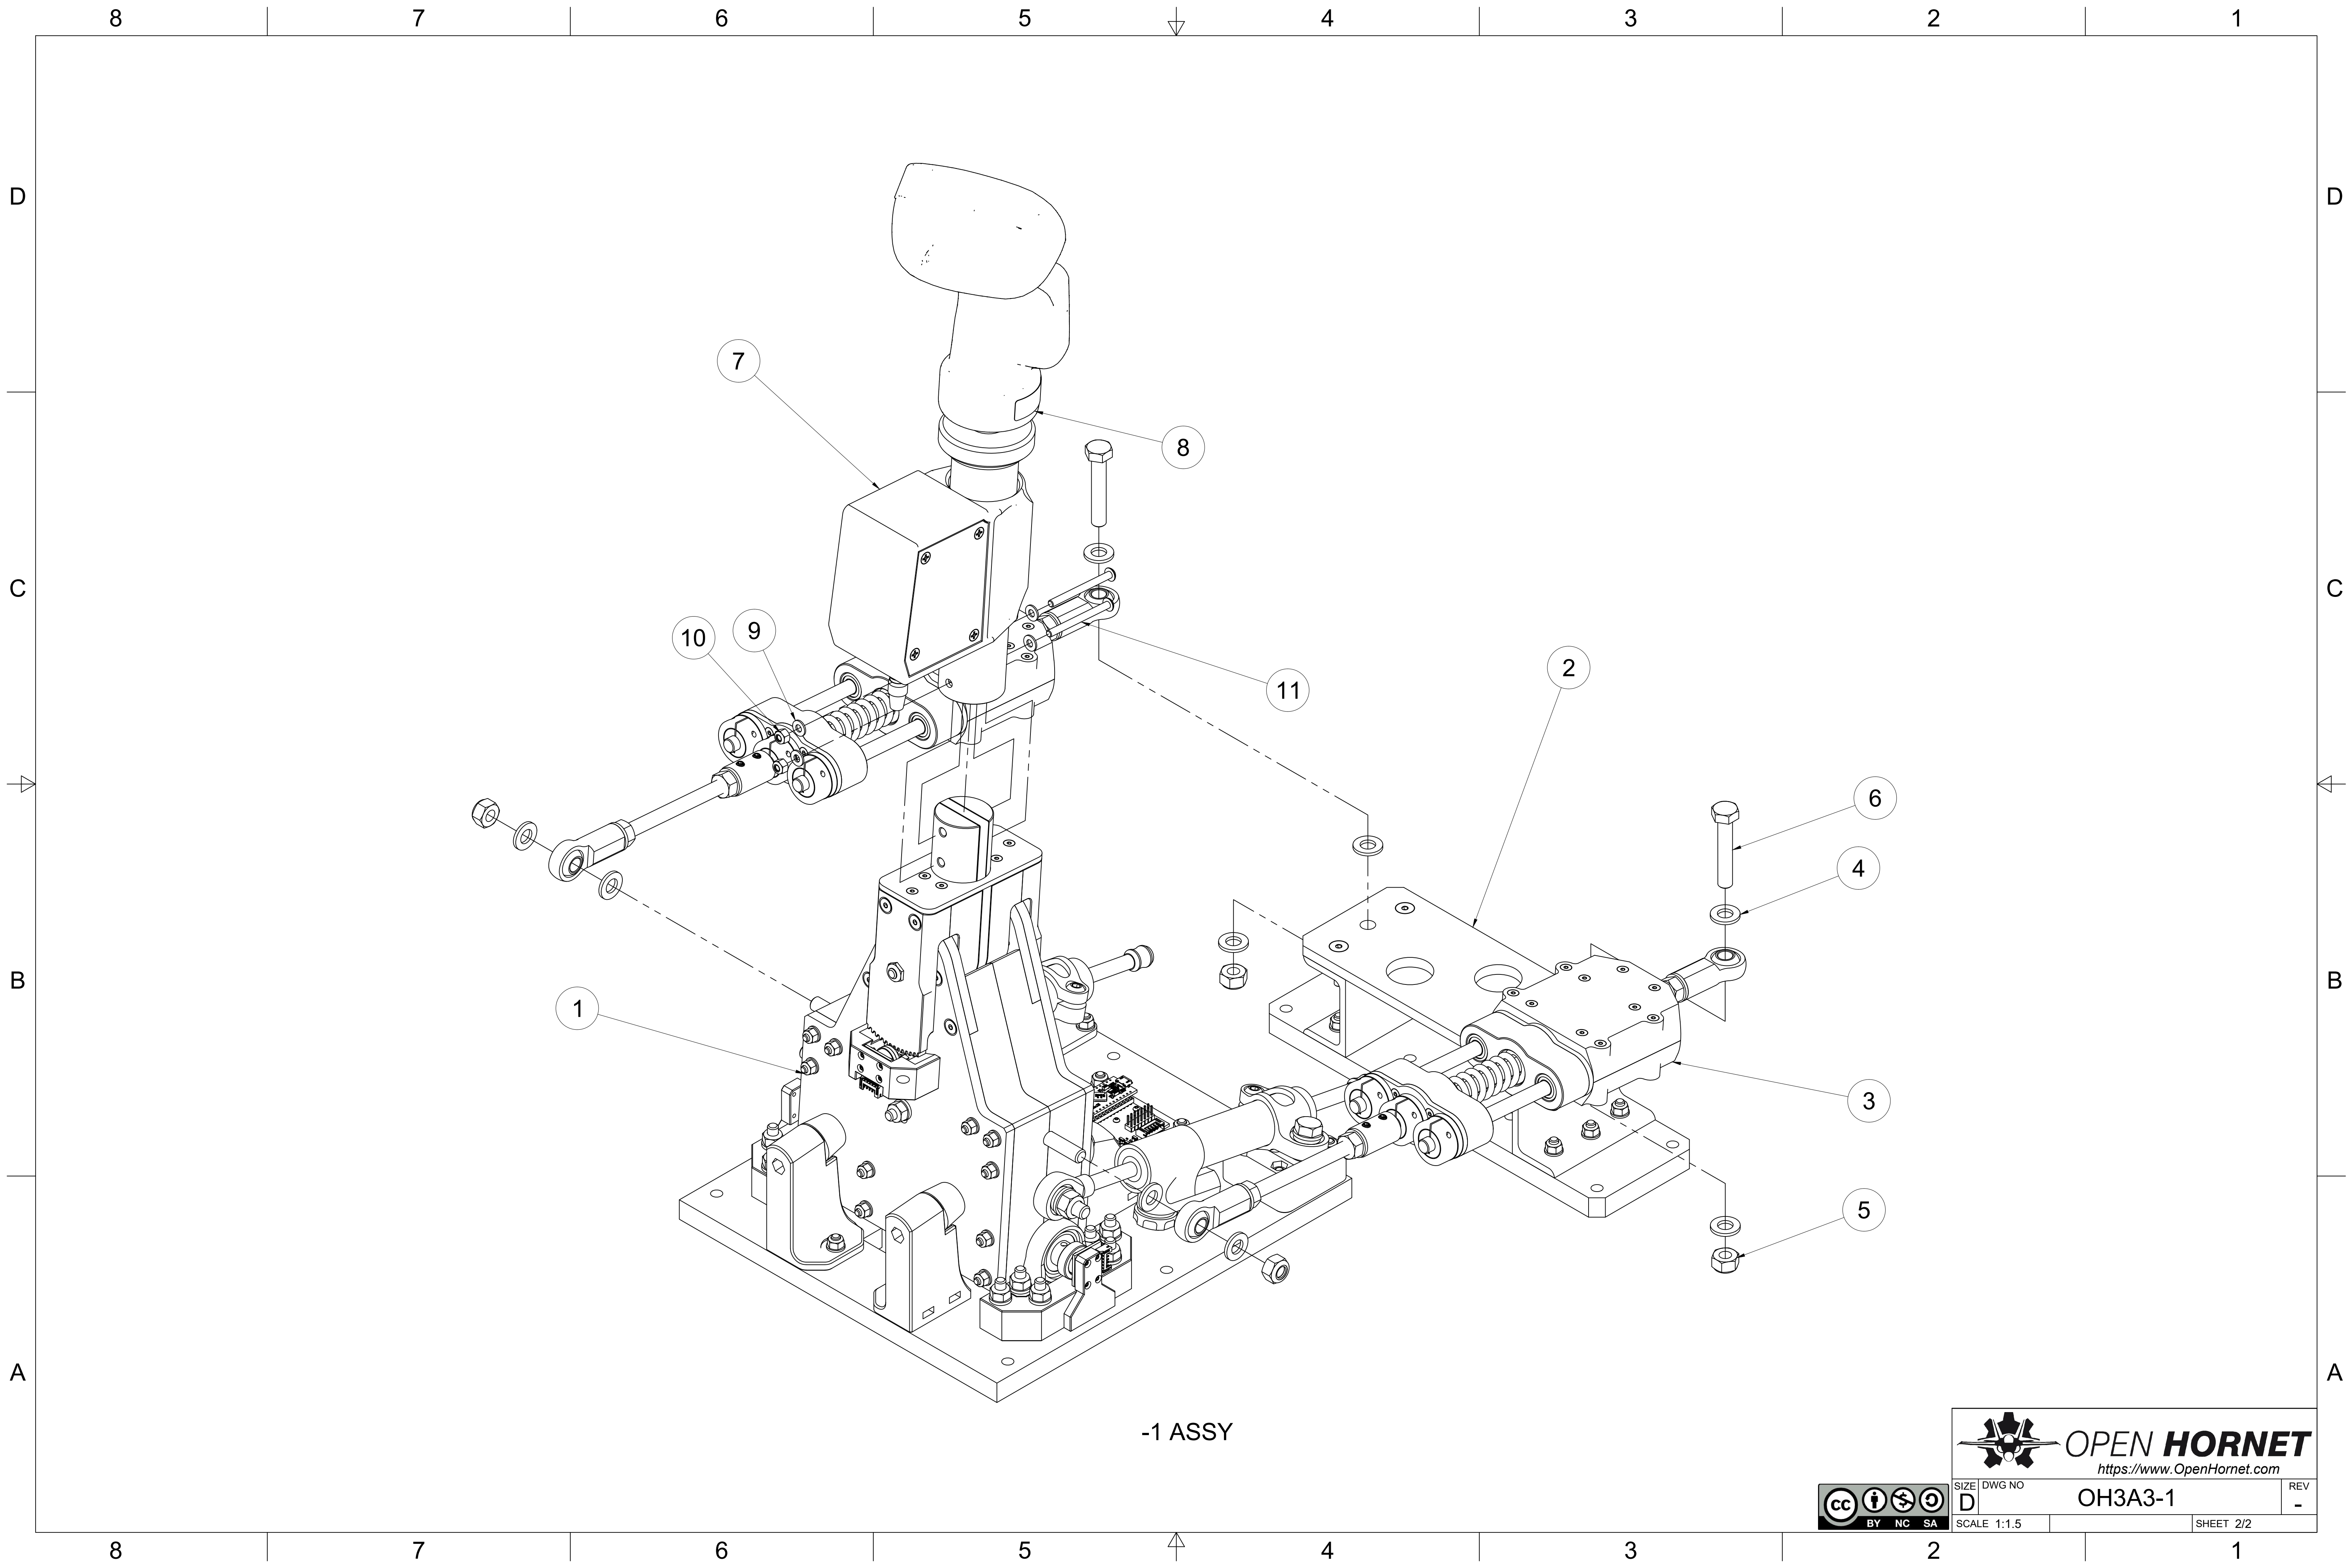

-1 ASSY



OPEN HORNET
<https://www.OpenHornet.com>

SIZE	DWG NO	REV
D	OH3A3-1	-
SCALE 1:1.5		SHEET 2/2

