

## 1. Description


### 1.1. Project

Project Name	BOARD
Board Name	STM32F4DISCOVERY
Generated with:	STM32CubeMX 4.25.1
Date	07/25/2018

### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VGTx
MCU Package	LQFP100
MCU Pin number	100

## 2. Pinout Configuration

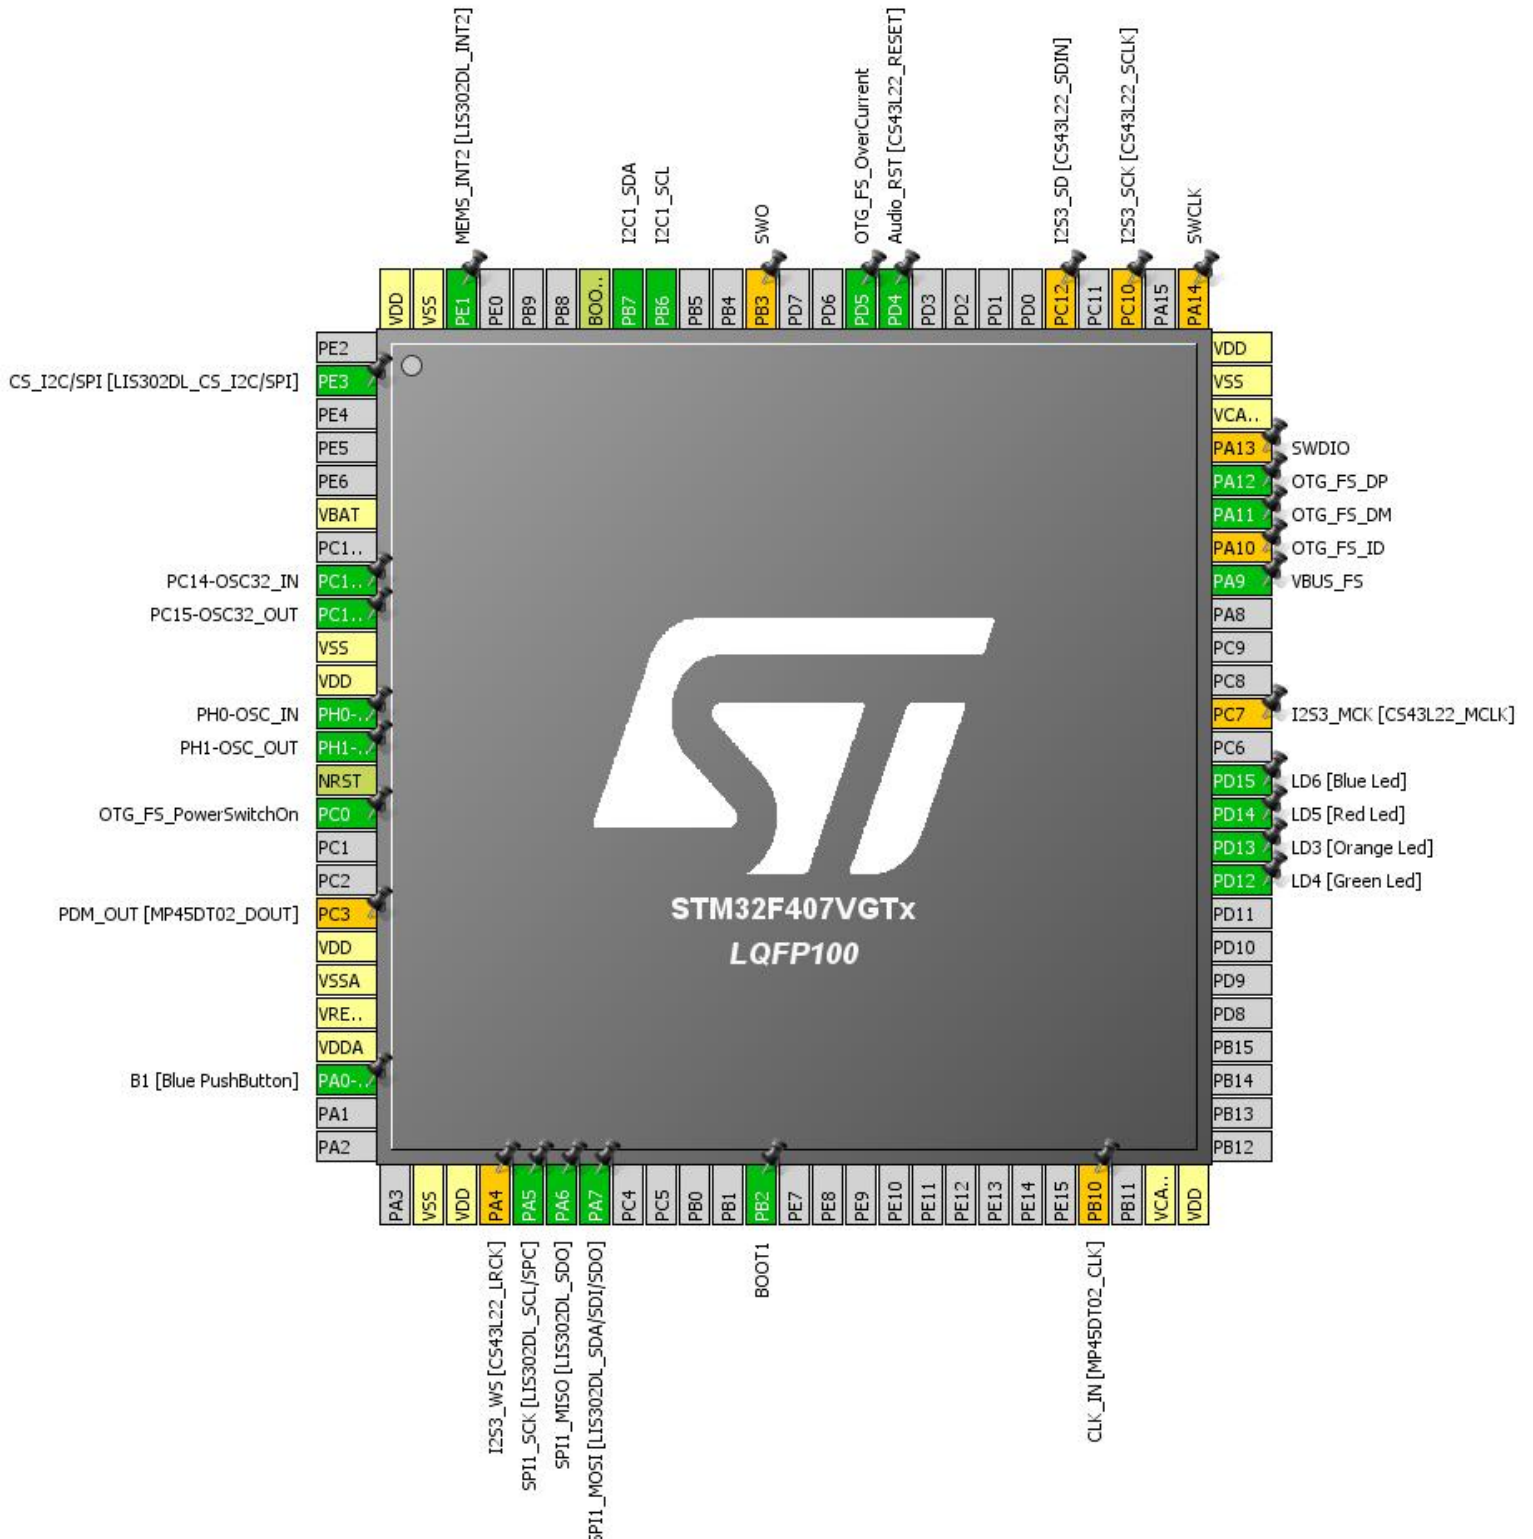

### 3. Pins Configuration


Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [LIS302DL_CS_I2C/SPI]
6	VBAT	Power		
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
15	PC0 *	I/O	GPIO_Output	OTG_FS_PowerSwitchOn
18	PC3 **	I/O	I2S2_SD	PDM_OUT [MP45DT02_DOUT]
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	GPIO_EXTI0	B1 [Blue PushButton]
27	VSS	Power		
28	VDD	Power		
29	PA4 **	I/O	I2S3_WS	I2S3_WS [CS43L22_LRCK]
30	PA5	I/O	SPI1_SCK	SPI1_SCK [LIS302DL_SCL/SPC]
31	PA6	I/O	SPI1_MISO	SPI1_MISO [LIS302DL_SDO]
32	PA7	I/O	SPI1_MOSI	SPI1_MOSI [LIS302DL_SDA/SDI/SDO]
37	PB2 *	I/O	GPIO_Input	BOOT1
47	PB10 **	I/O	I2S2_CK	CLK_IN [MP45DT02_CLK]
49	VCAP_1	Power		
50	VDD	Power		
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14 *	I/O	GPIO_Output	LD5 [Red Led]
62	PD15 *	I/O	GPIO_Output	LD6 [Blue Led]
64	PC7 **	I/O	I2S3_MCK	I2S3_MCK [CS43L22_MCLK]

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
68	PA9	I/O	USB_OTG_FS_VBUS	VBUS_FS
69	PA10 **	I/O	USB_OTG_FS_ID	OTG_FS_ID
70	PA11	I/O	USB_OTG_FS_DM	OTG_FS_DM
71	PA12	I/O	USB_OTG_FS_DP	OTG_FS_DP
72	PA13 **	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14 **	I/O	SYS_JTCK-SWCLK	SWCLK
78	PC10 **	I/O	I2S3_CK	I2S3_SCK [CS43L22_SCLK]
80	PC12 **	I/O	I2S3_SD	I2S3_SD [CS43L22_SDIN]
85	PD4 *	I/O	GPIO_Output	Audio_RST [CS43L22_RESET]
86	PD5 *	I/O	GPIO_Input	OTG_FS_OverCurrent
89	PB3 **	I/O	SYS_JTDO-SWO	SWO
92	PB6	I/O	I2C1_SCL	
93	PB7	I/O	I2C1_SDA	
94	BOOT0	Boot		
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [LIS302DL_INT2]
99	VSS	Power		
100	VDD	Power		

\* The pin is affected with an I/O function

\*\* The pin is affected with a peripheral function but no peripheral mode is activated

## 4. Clock Tree Configuration

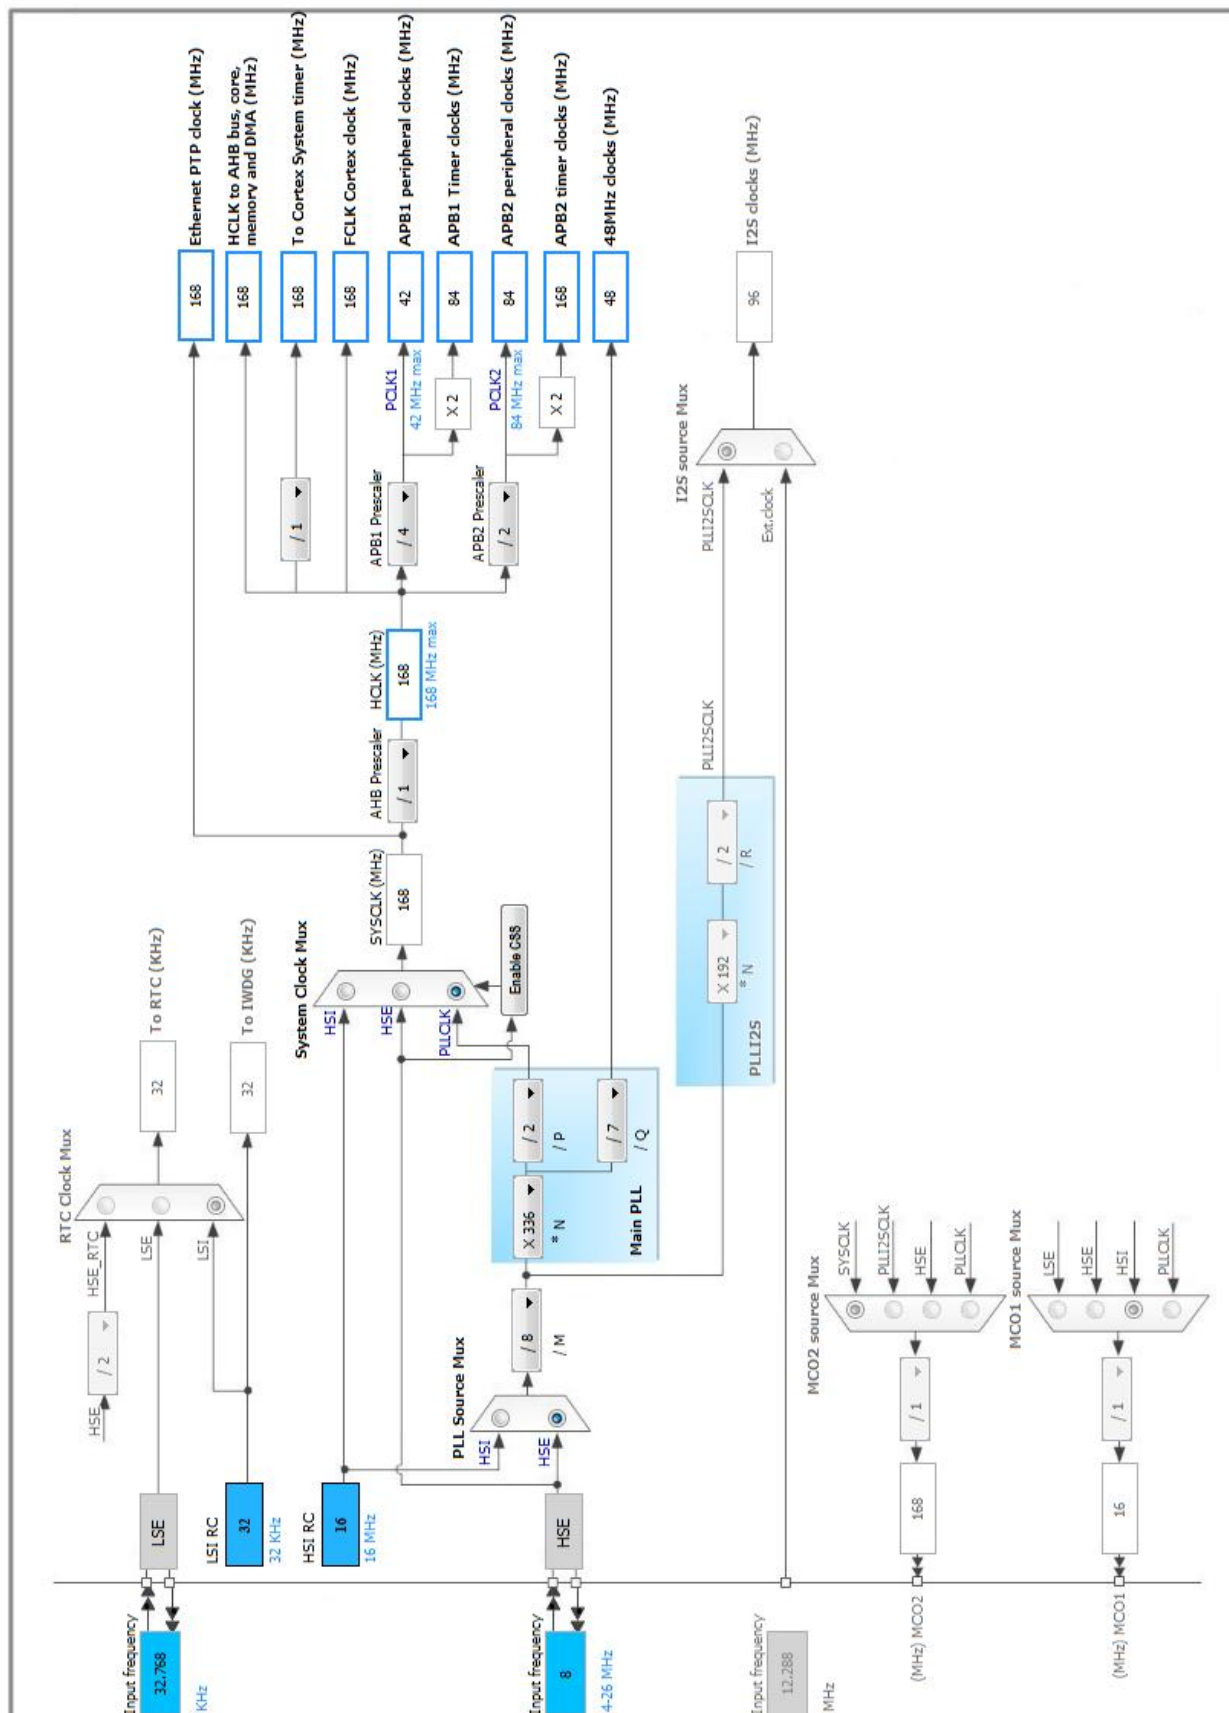

## 5. IPs and Middleware Configuration

### 5.1. I2C1

#### I2C: I2C

##### 5.1.1. Parameter Settings:

###### Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

###### Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

### 5.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

##### 5.2.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

###### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

### 5.3. SPI1

Mode: Full-Duplex Master

#### 5.3.1. Parameter Settings:

##### Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

##### Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	<b>42.0 MBits/s *</b>
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

##### Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

### 5.4. SYS

Timebase Source: SysTick

### 5.5. TIM6

mode: Activated

#### 5.5.1. Parameter Settings:

##### Counter Settings:

Prescaler (PSC - 16 bits value)	<b>42000 *</b>
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>1000 *</b>

##### Trigger Output (TRGO) Parameters:

Trigger Event Selection	Reset (UG bit from TIMx_EGR)
-------------------------	------------------------------

## 5.6. TIM7

mode: Activated

### 5.6.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	42000 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	2 *

#### Trigger Output (TRGO) Parameters:

Trigger Event Selection	Reset (UG bit from TIMx_EGR)
-------------------------	------------------------------

## 5.7. USB\_OTG\_FS

Mode: Host\_Only

mode: Activate\_VBUS

### 5.7.1. Parameter Settings:

Speed	Host Full Speed 12MBit/s
Enable internal IP DMA	Disabled
Signal start of frame	Disabled

## 5.8. USB\_HOST

Class for FS IP: Communication Host Class (Virtual Port Com)

### 5.8.1. Parameter Settings:

#### Host Configuration:

USBH_MAX_NUM_ENDPOINTS (Maximum number of endpoints)	2
USBH_MAX_NUM_INTERFACES (Maximum number of interfaces)	2
USBH_MAX_NUM_SUPPORTED_CLASS (Maximum number of supported class)	1
USBH_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBH_KEEP_CFG_DESCRIPTOR (Keep the configuration into RAM)	Enabled
USBH_MAX_SIZE_CONFIGURATION (Maximum size in bytes for the Configuration Descriptor)	256



USBH\_MAX\_DATA\_BUFFER (Maximun size of temporary data)

512

USBH\_DEBUG\_LEVEL (USBH Debug Level)

0: No debug message

**CMSIS\_RTOS:**

USBH\_USE\_OS (Enable the support of an RTOS)

Disabled

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	<b>No pull-up and no pull-down *</b>	<b>Very High *</b>	
	PB7	I2C1_SDA	Alternate Function Open Drain	<b>No pull-up and no pull-down *</b>	<b>Very High *</b>	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	PC15-OSC32_OUT
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_SCK [LIS302DL_SCL/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_MISO [LIS302DL_SDO]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_MOSI [LIS302DL_SDA/SDI/SDO]
USB_OTG_FS	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	VBUS_FS
	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_DM
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_DP
Single Mapped Signals	PC3	I2S2_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	PDM_OUT [MP45DT02_DOUT]
	PA4	I2S3_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_WS [CS43L22_LRCK]
	PB10	I2S2_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	CLK_IN [MP45DT02_CLK]
	PC7	I2S3_MCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_MCK [CS43L22_MCLK]
	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_ID
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-	n/a	n/a	n/a	SWCLK

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
		SWCLK				
	PC10	I2S3_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SCK [CS43L22_SCLK]
	PC12	I2S3_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SD [CS43L22_SDIN]
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CS_I2C/SPI [LIS302DL_CS_I2C/SPI]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OTG_FS_PowerSwitchOn
	PA0-WKUP	GPIO_EXTI0	<b>External Event Mode with Rising edge trigger detection *</b>	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PB2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	BOOT1
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5 [Red Led]
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6 [Blue Led]
	PD4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Audio_RST [CS43L22_RESET]
	PD5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	OTG_FS_OverCurrent
	PE1	GPIO_EXTI1	<b>External Event Mode with Rising edge trigger detection *</b>	No pull-up and no pull-down	n/a	MEMS_INT2 [LIS302DL_INT2]

## 6.2. DMA configuration

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
I2C1 event interrupt	true	0	0
I2C1 error interrupt	true	0	0
TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts	true	0	0
USB On The Go FS global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
SPI1 global interrupt	unused		
TIM7 global interrupt	unused		
FPU global interrupt	unused		

\* User modified value

## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VGTx
Datasheet	022152_Rev8

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	BOARD
Project Folder	D:\3_TREM Innovation\6_Programming\Cube\DISC\BOARD
Toolchain / IDE	TrueSTUDIO
Firmware Package Name and Version	STM32Cube FW_F4 V1.21.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

## ***9. Software Pack Report***