


The EM2S 60kHz radio receiver module and the MSF time signal

Deirdre O'Byrne, 6th February 2018

The EM2S module

The EM2S module is a cheap¹ 60kHz AM radio receiver module. It is designed to receive the MSF time signal² transmitted by the National Physical Laboratory (NPL) from Anthorn in north-west England.

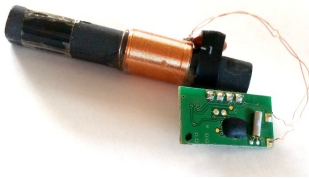


The MSF time signal consists of an accurate 60kHz carrier wave, which is turned on and off to broadcast time information. The NPL publishes³ details of how to interpret the signal.

In this paper I investigate how well the EM2S module receives this signal, with a view towards designing a noise-tolerant decoding algorithm.

The 5 different MSF signal waveforms

Each MSF signal waveform lasts for one second. The waveform starts at the start of each UTC second with the 60kHz carrier being turned off for 100ms, 200ms, 300ms or 500ms. For the purposes of this paper, the 5 different MSF signals are called “A0B0”, “A0B1”, “A1B0”, “A1B1” and “MIN”, and the waveforms transmitted by NPL are -

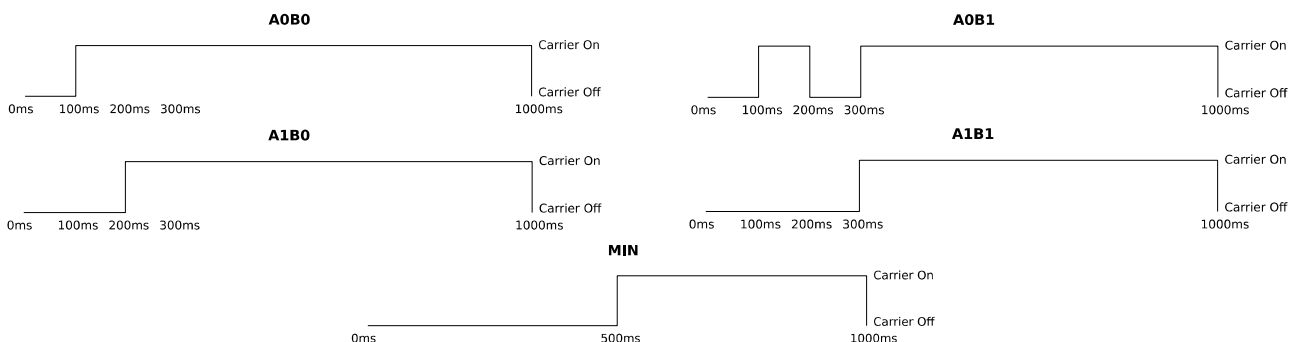

The EM2S module has an open collector output which is connected to ground when the carrier signal is not detected. Most EM2S decoding algorithms seem to work by detecting the relative times of the falling and rising of the carrier, which appear as falling and rising edges of the output of the module. However, this approach has two problems -

1. The edges do not usually occur close to their expected locations. Algorithms tend to give up to 40ms leeway.
2. Signal noise appears in the output signal of the EM2S modules as short-lived spikes – usually of less than about 15ms duration each. Algorithms have to accommodate these spikes.

1 Approx €20 for a module plus antenna at the time of writing - <https://www.hkw-shop.de/Empfangstechnik-AM/Empfangsmodul-EM2S-60-kHz.html?listtype=search&searchparam=em2s>

2 <http://www.npl.co.uk/science-technology/time-frequency/products-and-services/time/msf-radio-time-signal>

3 http://www.npl.co.uk/upload/pdf/MSF_Time_Date_Code.pdf

Experimental setup

I attached the output of two EM2S modules, and the PPS output of a GPS receiver, to a logic analyser running at 20kHz. This logic analyser was connected to a computer, which logged the raw data to a disk. Analysis was done on the data with custom software.


The experiment was conducted in the midlands of Ireland, near 53.7°N 7.8°W, and lasted from approximately 2018/01/28 22:57:54.58 UTC for approximately 8 days, 4 hours, 17 minutes and 14.26 seconds.

The software was written with knowledge of which UTC second each GPS PPS signal represented, and was thus able to determine which of the 5 MSF signals should occur during each second.

Experiment 1 – EM2S timing signal accuracy

For the first experiment, I wanted to find out how accurately the EM2S receivers detected the loss of the MSF carrier at the start of each second. The analysis was to measure the delay between the GPS PPS signal and the first falling edge of the output of the EM2S receivers.


First falling edge of EM2S signal

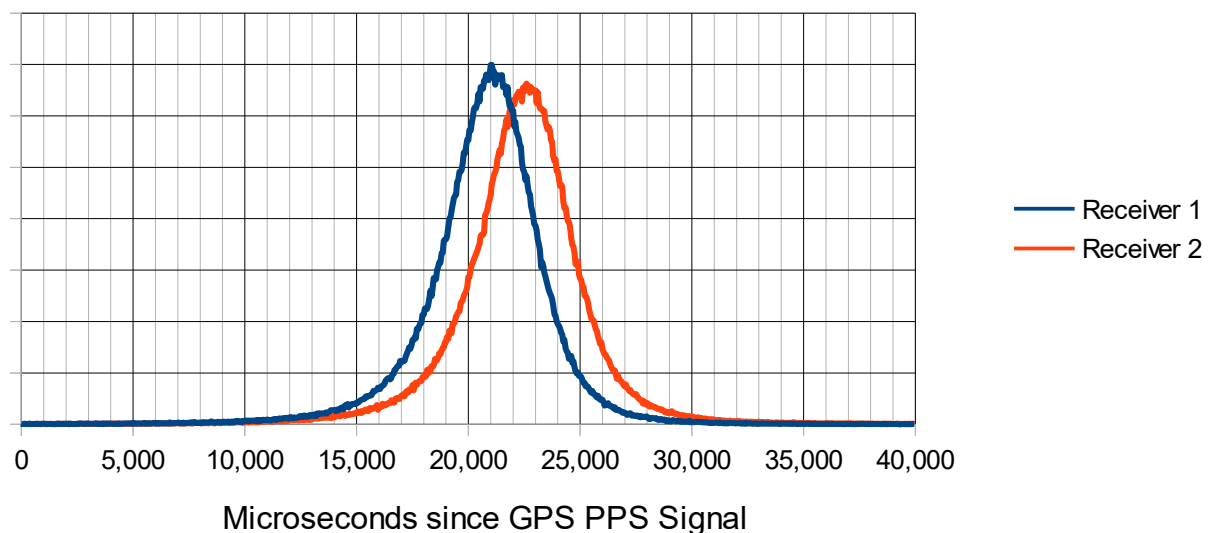


This graph shows a histogram of the locations within the UTC second of the first falling edge of the EM2S output signal. It is observed that receiver 1 detects the loss of the 60kHz carrier on average 20.7 milliseconds after the start of the UTC second, and receiver 2 detects it on average 22.3 milliseconds after. These two receivers were within 20cm of each other at all times.

Experiment 2 – average value of the signal

For the second experiment, I measured the value of the EM2S output for each of 1,080 millisecond intervals from the first detection of the falling edge of that output after the GPS PPS signal.

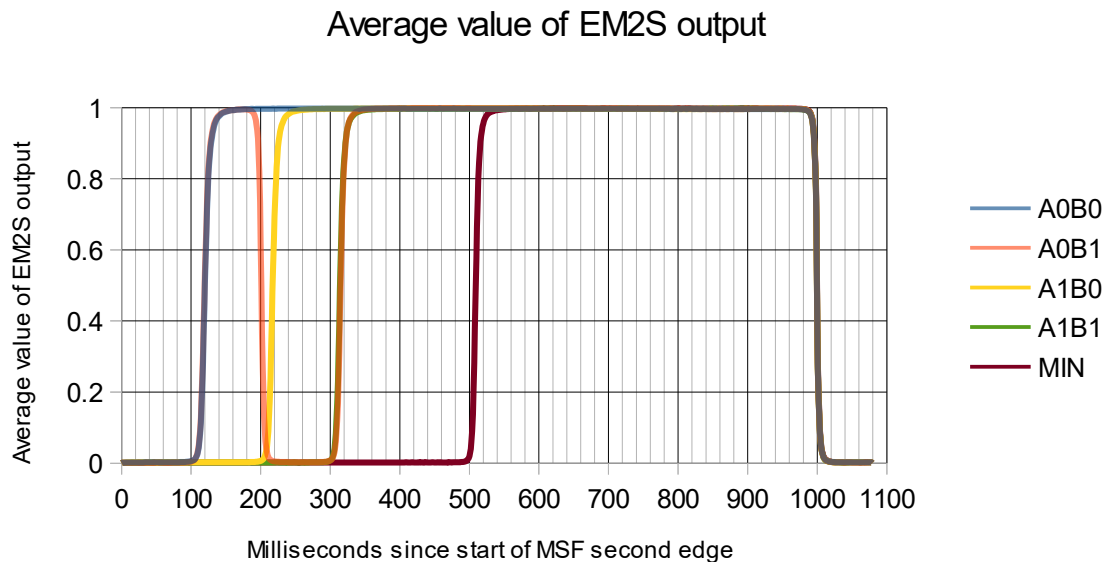

This graph shows the average value of the EM2S output signal during each of the 5 MSF second waveforms. It is observed that rising edges tend to be “late”, whereas falling edges tend to be closer to where they are supposed to be. Also, there is about 20ms - 40ms of spread in the location of the edges. This can be seen more clearly in the following histogram -

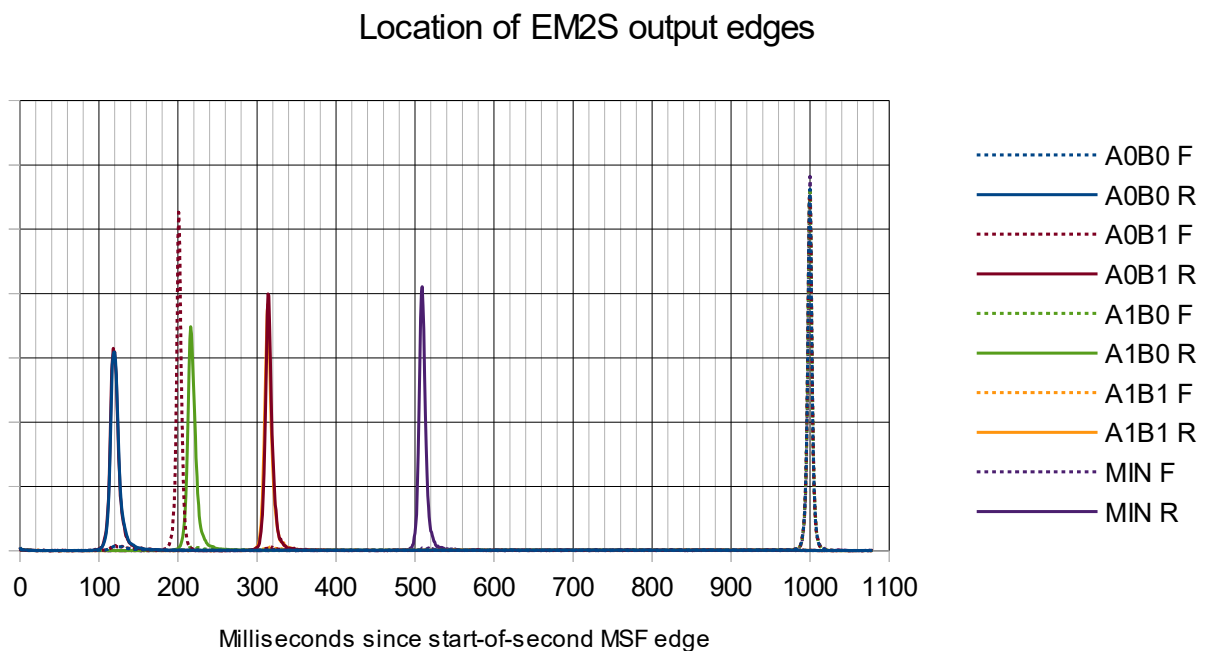

It is observed that each rising edge has noticeable falling-edge noise associated with it (the dotted lines below each solid line). Indeed examination of the raw data shows that rising edges often have noise spikes close to them.


A decoding algorithm

Decoding algorithms based on the location of rising and falling edges are problematic. The edges are not where they are supposed to be, there is significant spread in their observed location, and there is significant noise associated with rising edges in particular. Noise is also occasionally observed between the edges, and accounting for this noise is not trivial in a decoding algorithm.

Decoding algorithms based on taking many samples of the signal at regular intervals seems to be a

more resilient approach. The inherent inaccuracy of the EM2S modules is such that sampling at 1kHz is more than adequate, and even a sampling rate no faster than 500Hz should be sufficient. The question becomes – how many of the observed samples in each 100ms interval need to be of a given value for the overall signal to be deemed to have that value during that interval?

The key intervals are 100ms to 200ms after the start of MSF second edge, 200ms to 300ms, 300ms to 400ms, and 500ms to 600ms. The corresponding histograms are presented below -

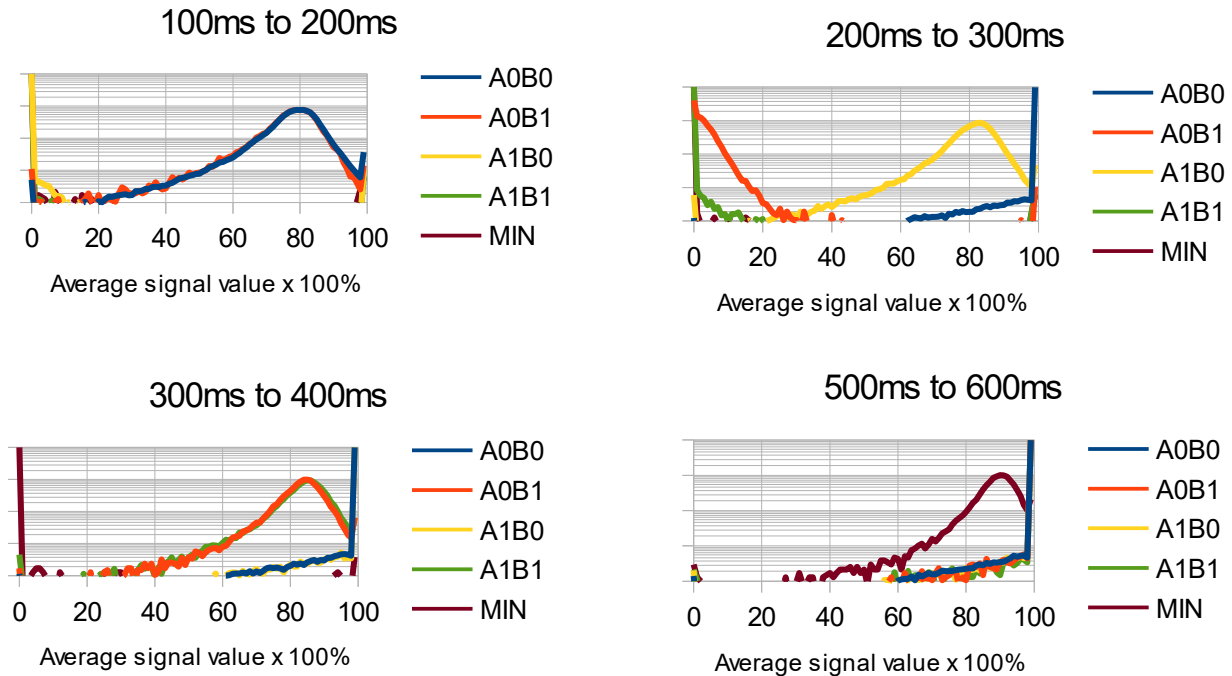


The trickiest problem is deciding between A0B1 and A1B0 in the 200ms to 300ms interval. As can be seen by the graphs, if the average signal level is less than about 25%, the carrier should be considered to be off, and if it is more than 25%, the carrier should be considered to be on. Using this algorithm, we get the following result -

Actual signal	Decoded signal					
	A0B0	A0B1	A1B0	A1B1	MIN	Unknown
A0B0	940,122	119	1,815	75	1	5,263
A0B1	88	46,663	5	108	0	248
A1B0	175	9	331,040	605	1	1,644
A1B1	7	10	21	60,956	6	353
MIN	5	0	5	4	23,416	116

There are relatively few unknown signals, and few misidentified signals.

The unknown signals, and the signal errors, appear to come in groups as shown in the following histogram -


Decoding errors

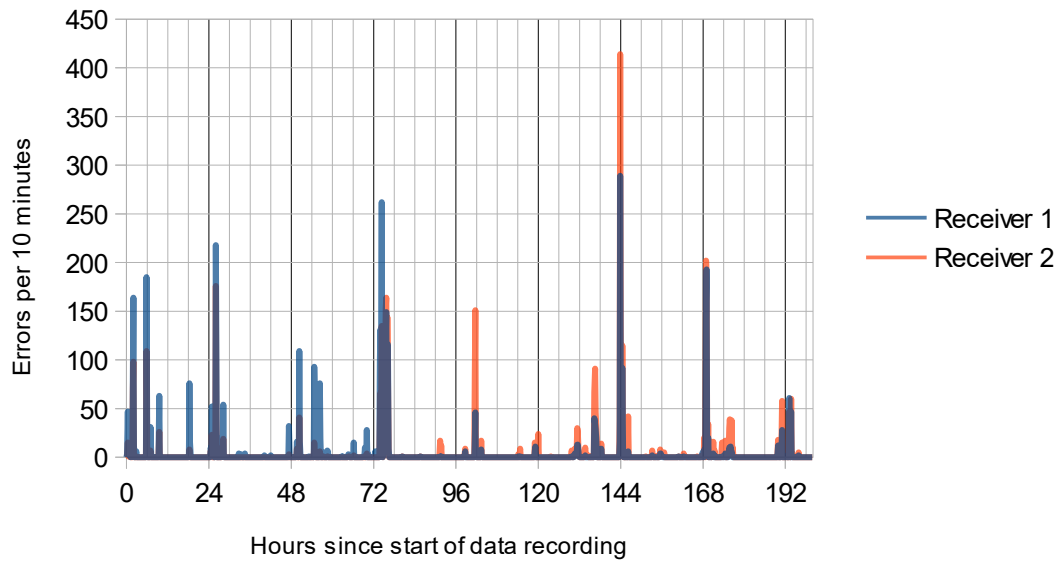

There also appears to be something of a 24-hour periodicity to some of the errors.

The EM2S modules and their antennas were placed in an upstairs bedroom near the floor and a 3D printer (which was turned off and powered down). Hence it is probably the case that a large number of the errors are due to poor antenna location.

The graph of the difference between EM2S/MSF and UTC seconds over time is presented below -

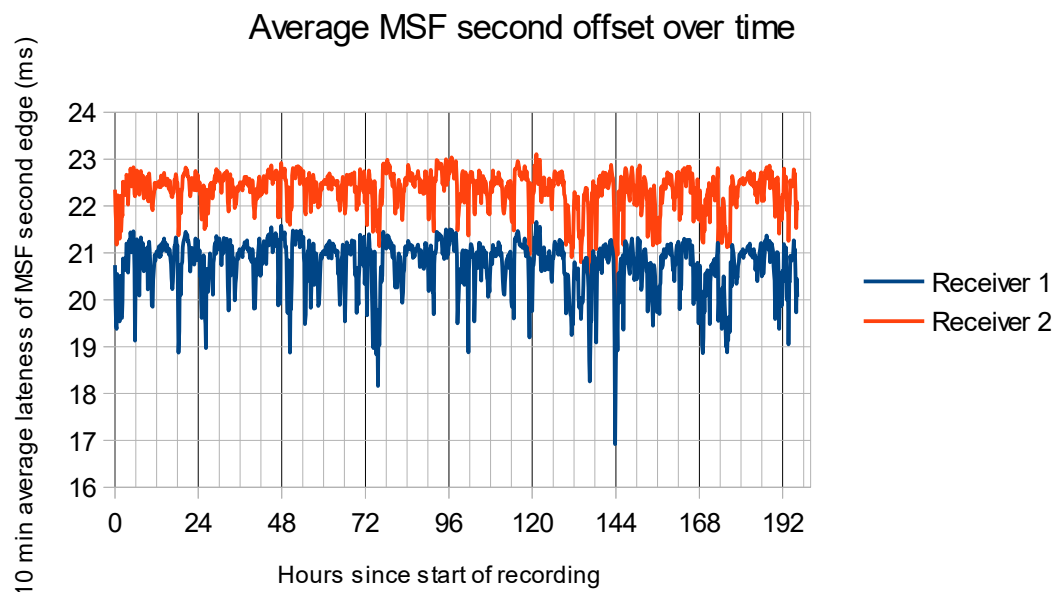


Start of second detection


Algorithms for detecting the start of the second are not considered by this paper, as the algorithms in use by my analysis have access to the start of the second through the GPS PPS signal.

Histograms of the time difference between successive start of MSF second edges are presented below in the hope they will be useful.

Time difference between MSF seconds

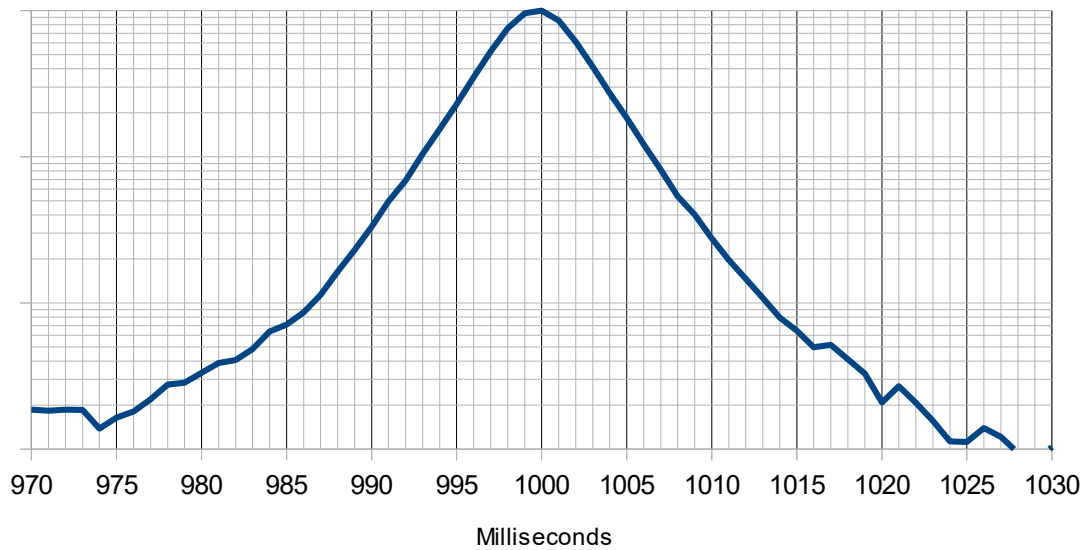

Time difference between MSF seconds

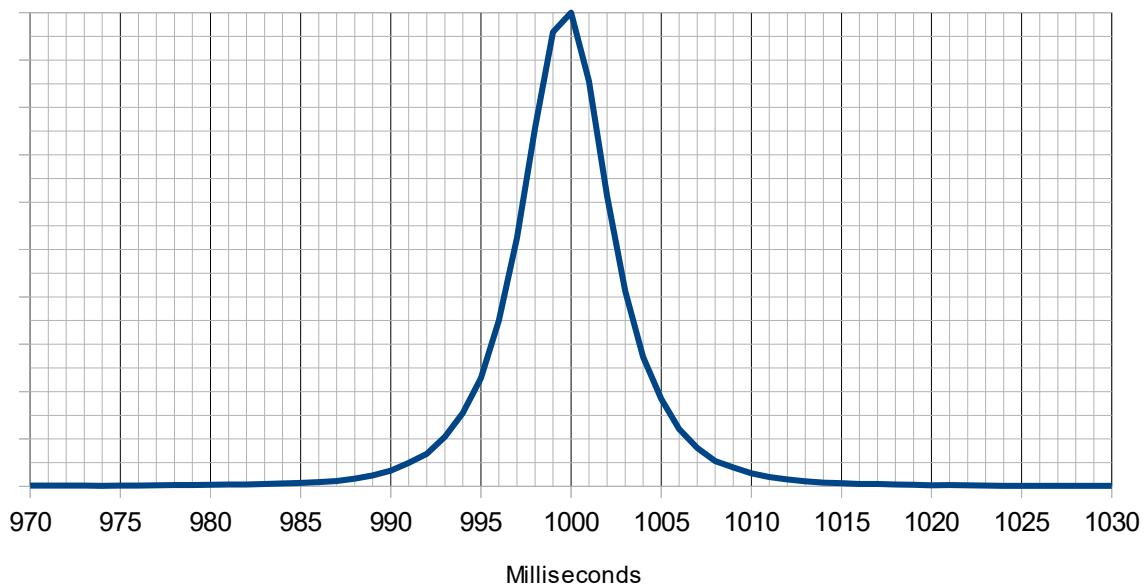

The first histogram has a logarithmic scale, and the second is the same data with a linear scale.

Other decoding algorithms

Research was also conducted on an algorithm which splits the second into intervals from 0ms – 80ms, 160ms – 180ms, 260ms – 280ms, 360ms – 400ms, 400ms – 480ms, 560ms – 600ms, 600ms – 700ms, 700ms – 800ms, 800ms – 900ms, 900ms – 980ms. This was found to not perform as well as the algorithm presented above.

A small improvement can be obtained if a threshold of 15% is used for every 100ms interval except the 200ms – 300ms interval, which should remain at 25%. When this algorithm is used, we get -

Actual signal	Decoded signal					
	A0B0	A0B1	A1B0	A1B1	MIN	Unknown
A0B0	941,301	150	984	68	1	4,891
A0B1	89	46,731	3	69	0	220
A1B0	264	17	331,108	621	0	1,464
A1B1	11	14	18	61,016	5	289
MIN	8	3	4	5	23,410	116

The data, and the analysis code, used in this project have been made available on github⁴. The reader is welcome to try their own ideas for a decoding algorithm, as well as to test their production algorithm against a large dataset.

Future developments

It is noted that there are many disallowed patterns in the signal. For starters, the waveform for each second should broadly correspond to one of the 5 nominal waveforms given above. The following table lists the actual decoded pattern which was seen in the top 20 misidentifications of each misidentified signal. The patterns are the carrier absent (“0”) or present (“1”) during each 100ms interval of the second -

Top mis-identified patterns									
A0B0 (01111111)		A0B1 (01011111)		A1B0 (00111111)		A1B1 (00011111)		MIN (00001111)	
Pattern	Instances	Pattern	Instances	Pattern	Instances	Pattern	Instances	Pattern	Instances
11111111	2105	01111111	89	00011111	621	00001111	57	11111111	22
00111111	984	00011111	69	11111111	466	11111111	54	00001111	19
11111110	467	11111111	67	01111111	264	10011111	23	01111111	8
01111110	214	01111110	33	10111111	105	00111111	18	00000111	8
11111110	197	11011111	32	11111110	79	11011111	14	01001111	5
01011111	150	01001111	12	00111110	65	01011111	14	00011111	5
11111101	131	10111110	10	11111110	48	01111111	11	00111111	4
01111011	124	11111110	8	11111110	34	11111001	11	10000111	4
01111101	116	00001111	5	11111101	33	11111100	10	11010111	4
01111011	111	01011110	5	11111100	32	00011110	9	00000110	4
01111110	105	01111110	4	00111101	32	00011101	9	11011111	3
11111011	91	01011101	4	00111011	31	10111111	7	01011111	3
11110111	84	00111111	3	00111110	30	11111100	7	00010111	3
01101111	82	10011111	3	00110111	27	11100111	6	11101011	3
01101111	81	01011011	3	11110111	25	00010111	6	10011111	2
11011111	76	01011011	3	11011111	23	00011011	5	10001111	2
11111110	76	10111111	2	10011111	23	00000111	5	01000111	2
00011111	68	11101111	2	11111011	23	11111110	4	11000111	2
10111111	62	01011110	2	11101111	22	00010111	4	00111110	2
11101111	47	00011110	2	11111001	21	00111110	3	11110101	2

The NPL-published algorithm for determining the time from the received signal gives another way of detecting (and hence possibly correcting) received errors. There are many restraints which follow from that algorithm. For instance, the date and day-of-week should remain the same from minute to minute unless the time-of-day goes from 23:59 to 00:00. Such an algorithm was baptised the “blame algorithm” by Poul-Henning Kamp of the time-nuts mailing list⁵. A blame algorithm in conjunction with study of the table above may generate further improvements in an overall decoding algorithm. For instance, each pattern could be assigned a set of confidences that it should be decoded as a certain value, and the blame algorithm could be used to solidify those confidences into a most likely decoded signal. And the confidences themselves could be informed by the average signal level observed during the 100ms intervals – an observed average of 20%, for instance, could easily be either a “0” or a “1”.

⁴ <https://github.com/deirdreobyne/MSF-EM2S>

⁵ <https://www.febo.com/pipermail/time-nuts/2018-February/108775.html>

Towards more absolute accuracy


It turns out⁶ that there is a correlation between the time interval between second markers and how late those markers are relative to UTC. Performing the calculations on the data set, we get -

	Slope	Constant	Correlation
Receiver 1	0.4871	-466,360us	0.671
Receiver 2	0.4829	-460,620us	0.675

i.e. the second edge is late by an amount of approximately 0.48 times the second length minus 465,000 microseconds, with a correlation of about 67%.

When we apply the *same* correction to *both* signals, we get -

Position of corrected MSF second edge

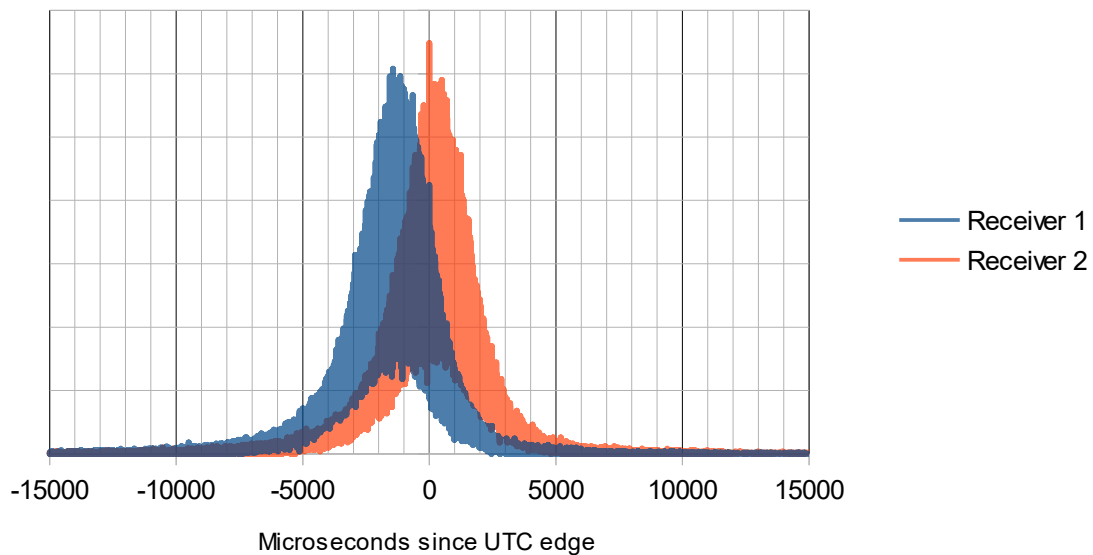

⁶ <https://www.febo.com/pipermail/time-nuts/2018-February/108804.html>