

A scenic landscape featuring a calm lake in the foreground that perfectly reflects the surrounding environment. In the middle ground, a dense forest of tall, dark evergreen trees stands along the shoreline. Behind the forest, a range of rugged mountains is visible, with the highest peaks covered in snow and partially shrouded in a soft, golden mist. The sky is a clear, pale blue. The overall atmosphere is peaceful and majestic. A semi-transparent blue banner is positioned across the upper portion of the image, containing the text 'LIVE PRODUCTION 2' in white, bold, sans-serif capital letters.

LIVE PRODUCTION 2

Components

PA – *HK E.L.I.A.S*

Monitoring – *JBL EON15*

Mixing Desk – *Allen & Heath iLive*

Sources – Mics, Instruments, Player etc.

BPR LIVE SYSTEM

MONITOR Input
(From Mixer Aux)

MAIN Input
(From Mixer Stereo L-R)

Input Gain (Volume)

MAIN / MONITOR
Select
(For Satellite Out B)

Satellite Out B
2nd Top Main
or
Monitor Speaker

Satellite Out A
Top Main
(Mid + Hi Freq)



HK E.L.I.A.S. PA
ANSCHLÜSSE


HAGENBERG BPR CONFIGURATION

(Layout can differ depending on setup config)



A&H T112 Surface OUTPUT

Touch Panel Setup

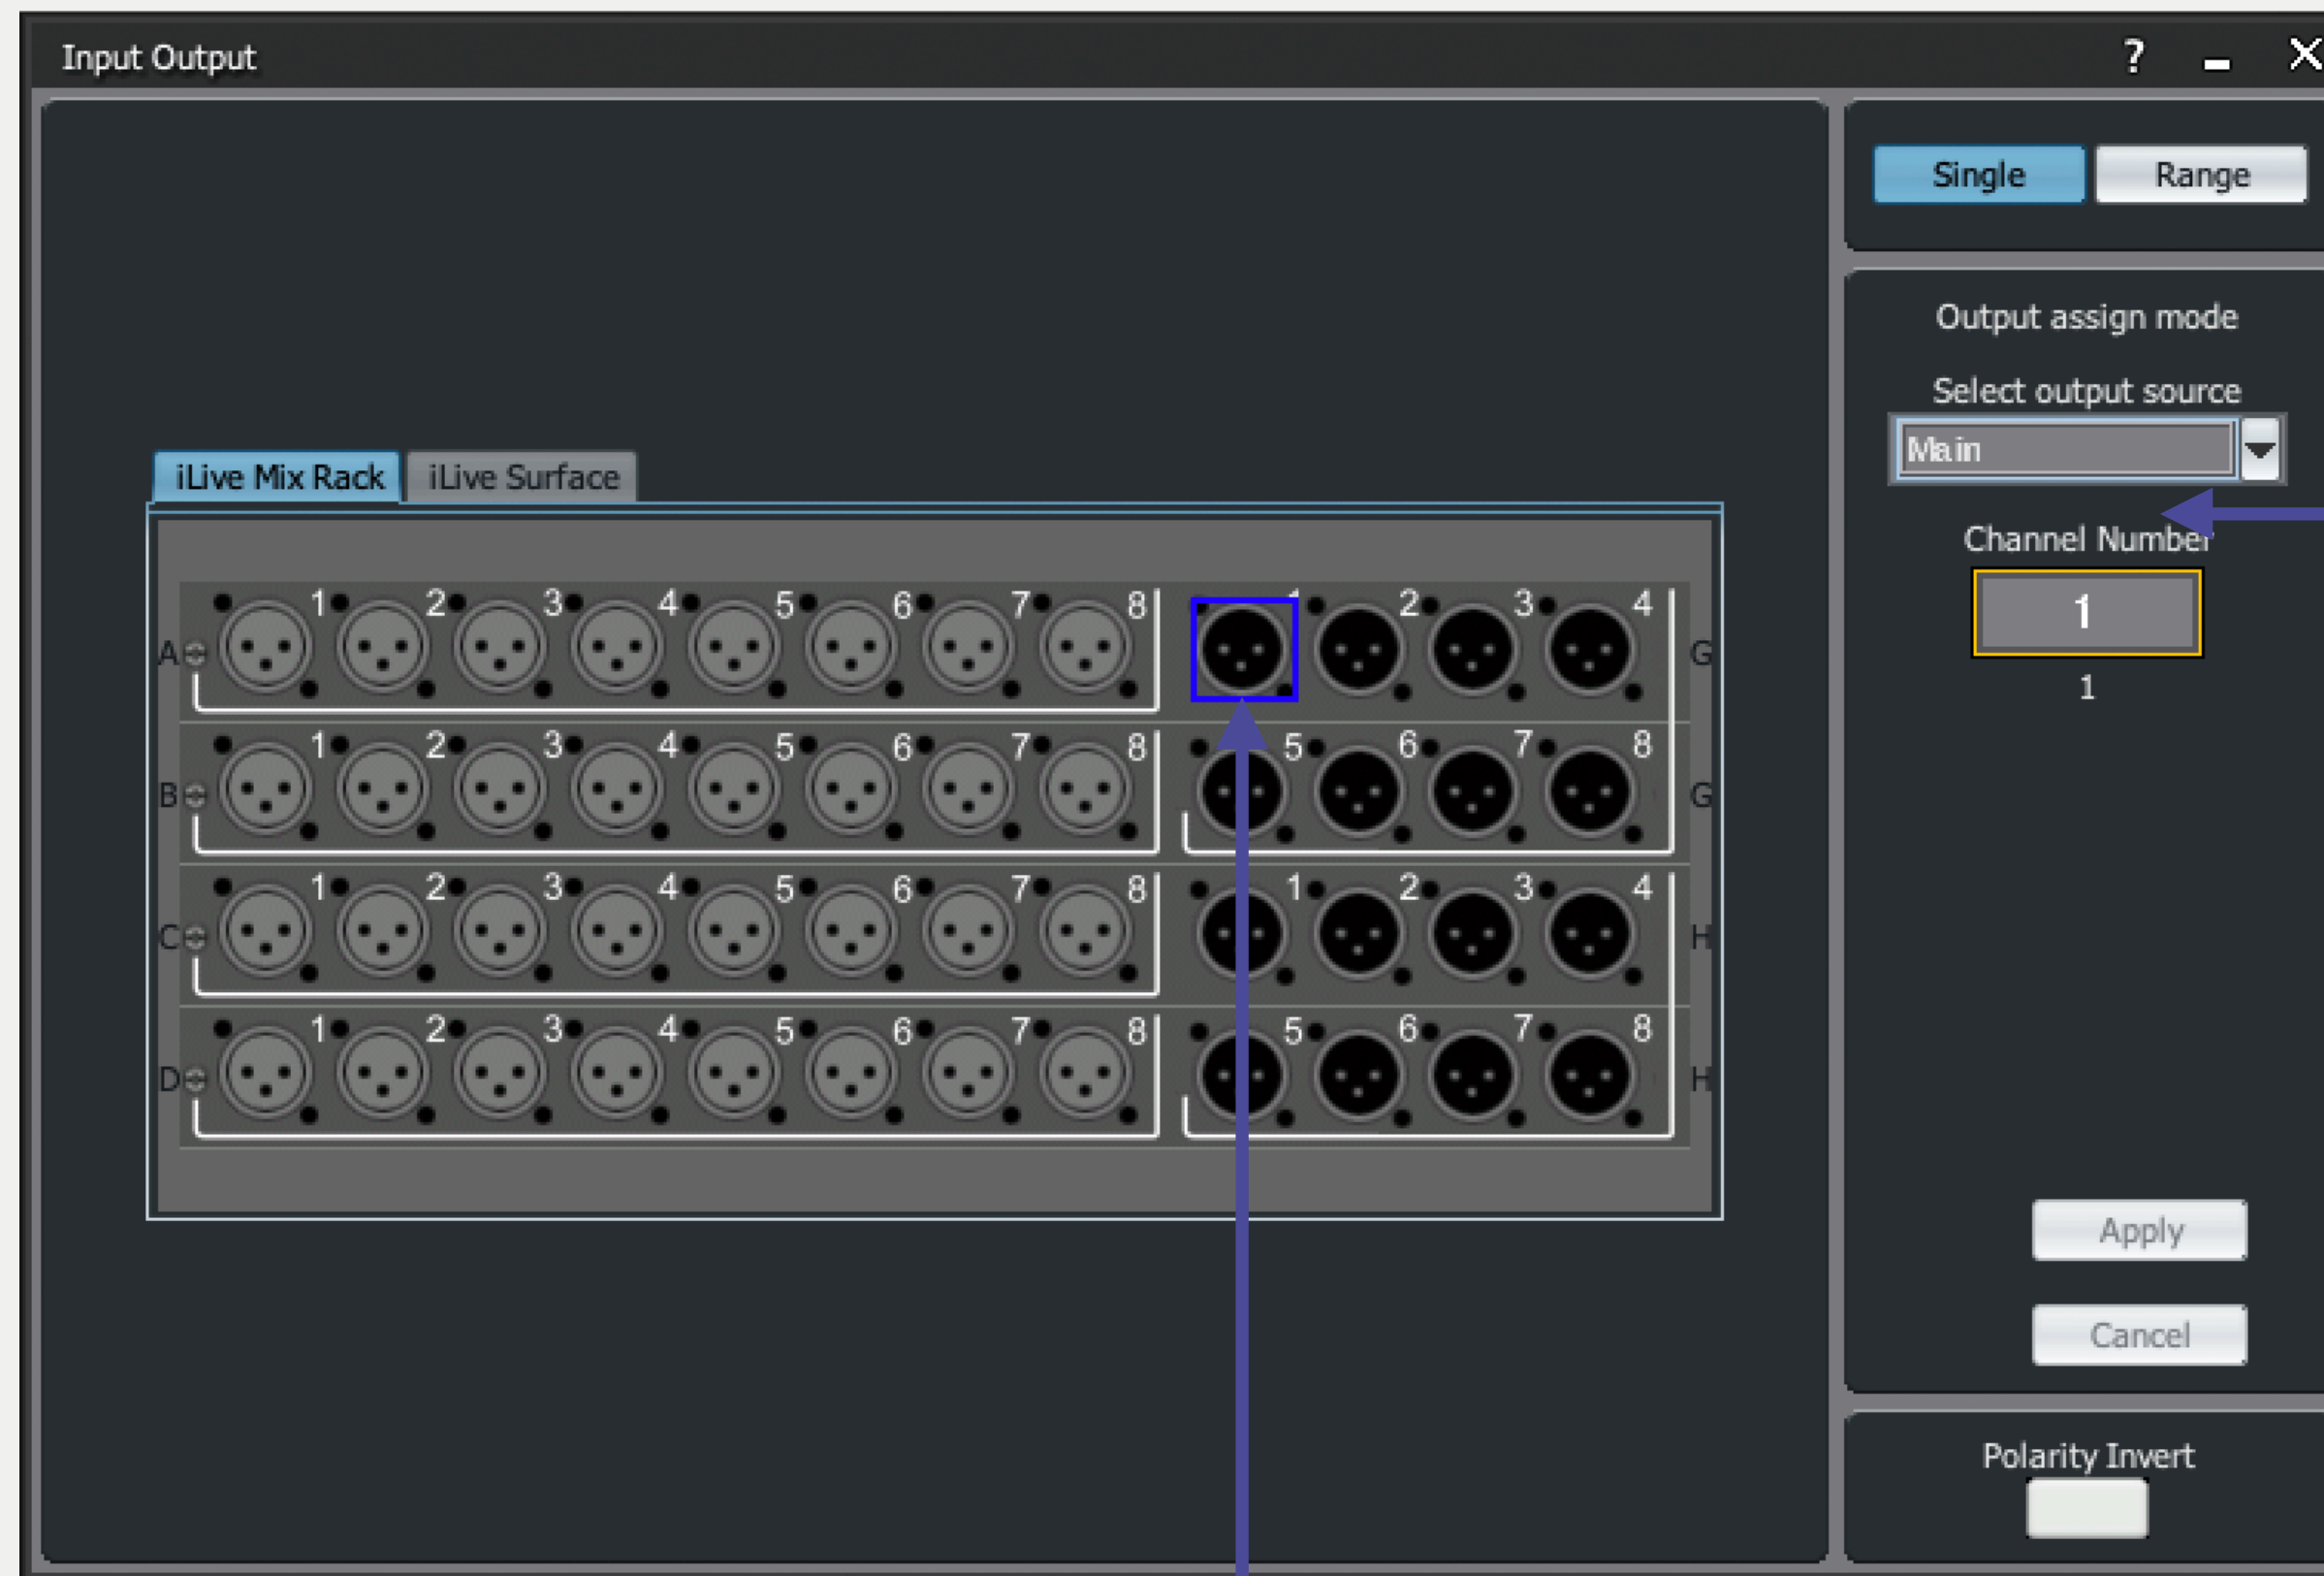


assigned Source

Selected Output
Connector

A&H iDR MIXRACK32
OUTPUT CONFIG

A&H T112 Surface INPUT

Kanal Selektieren – PREAMP

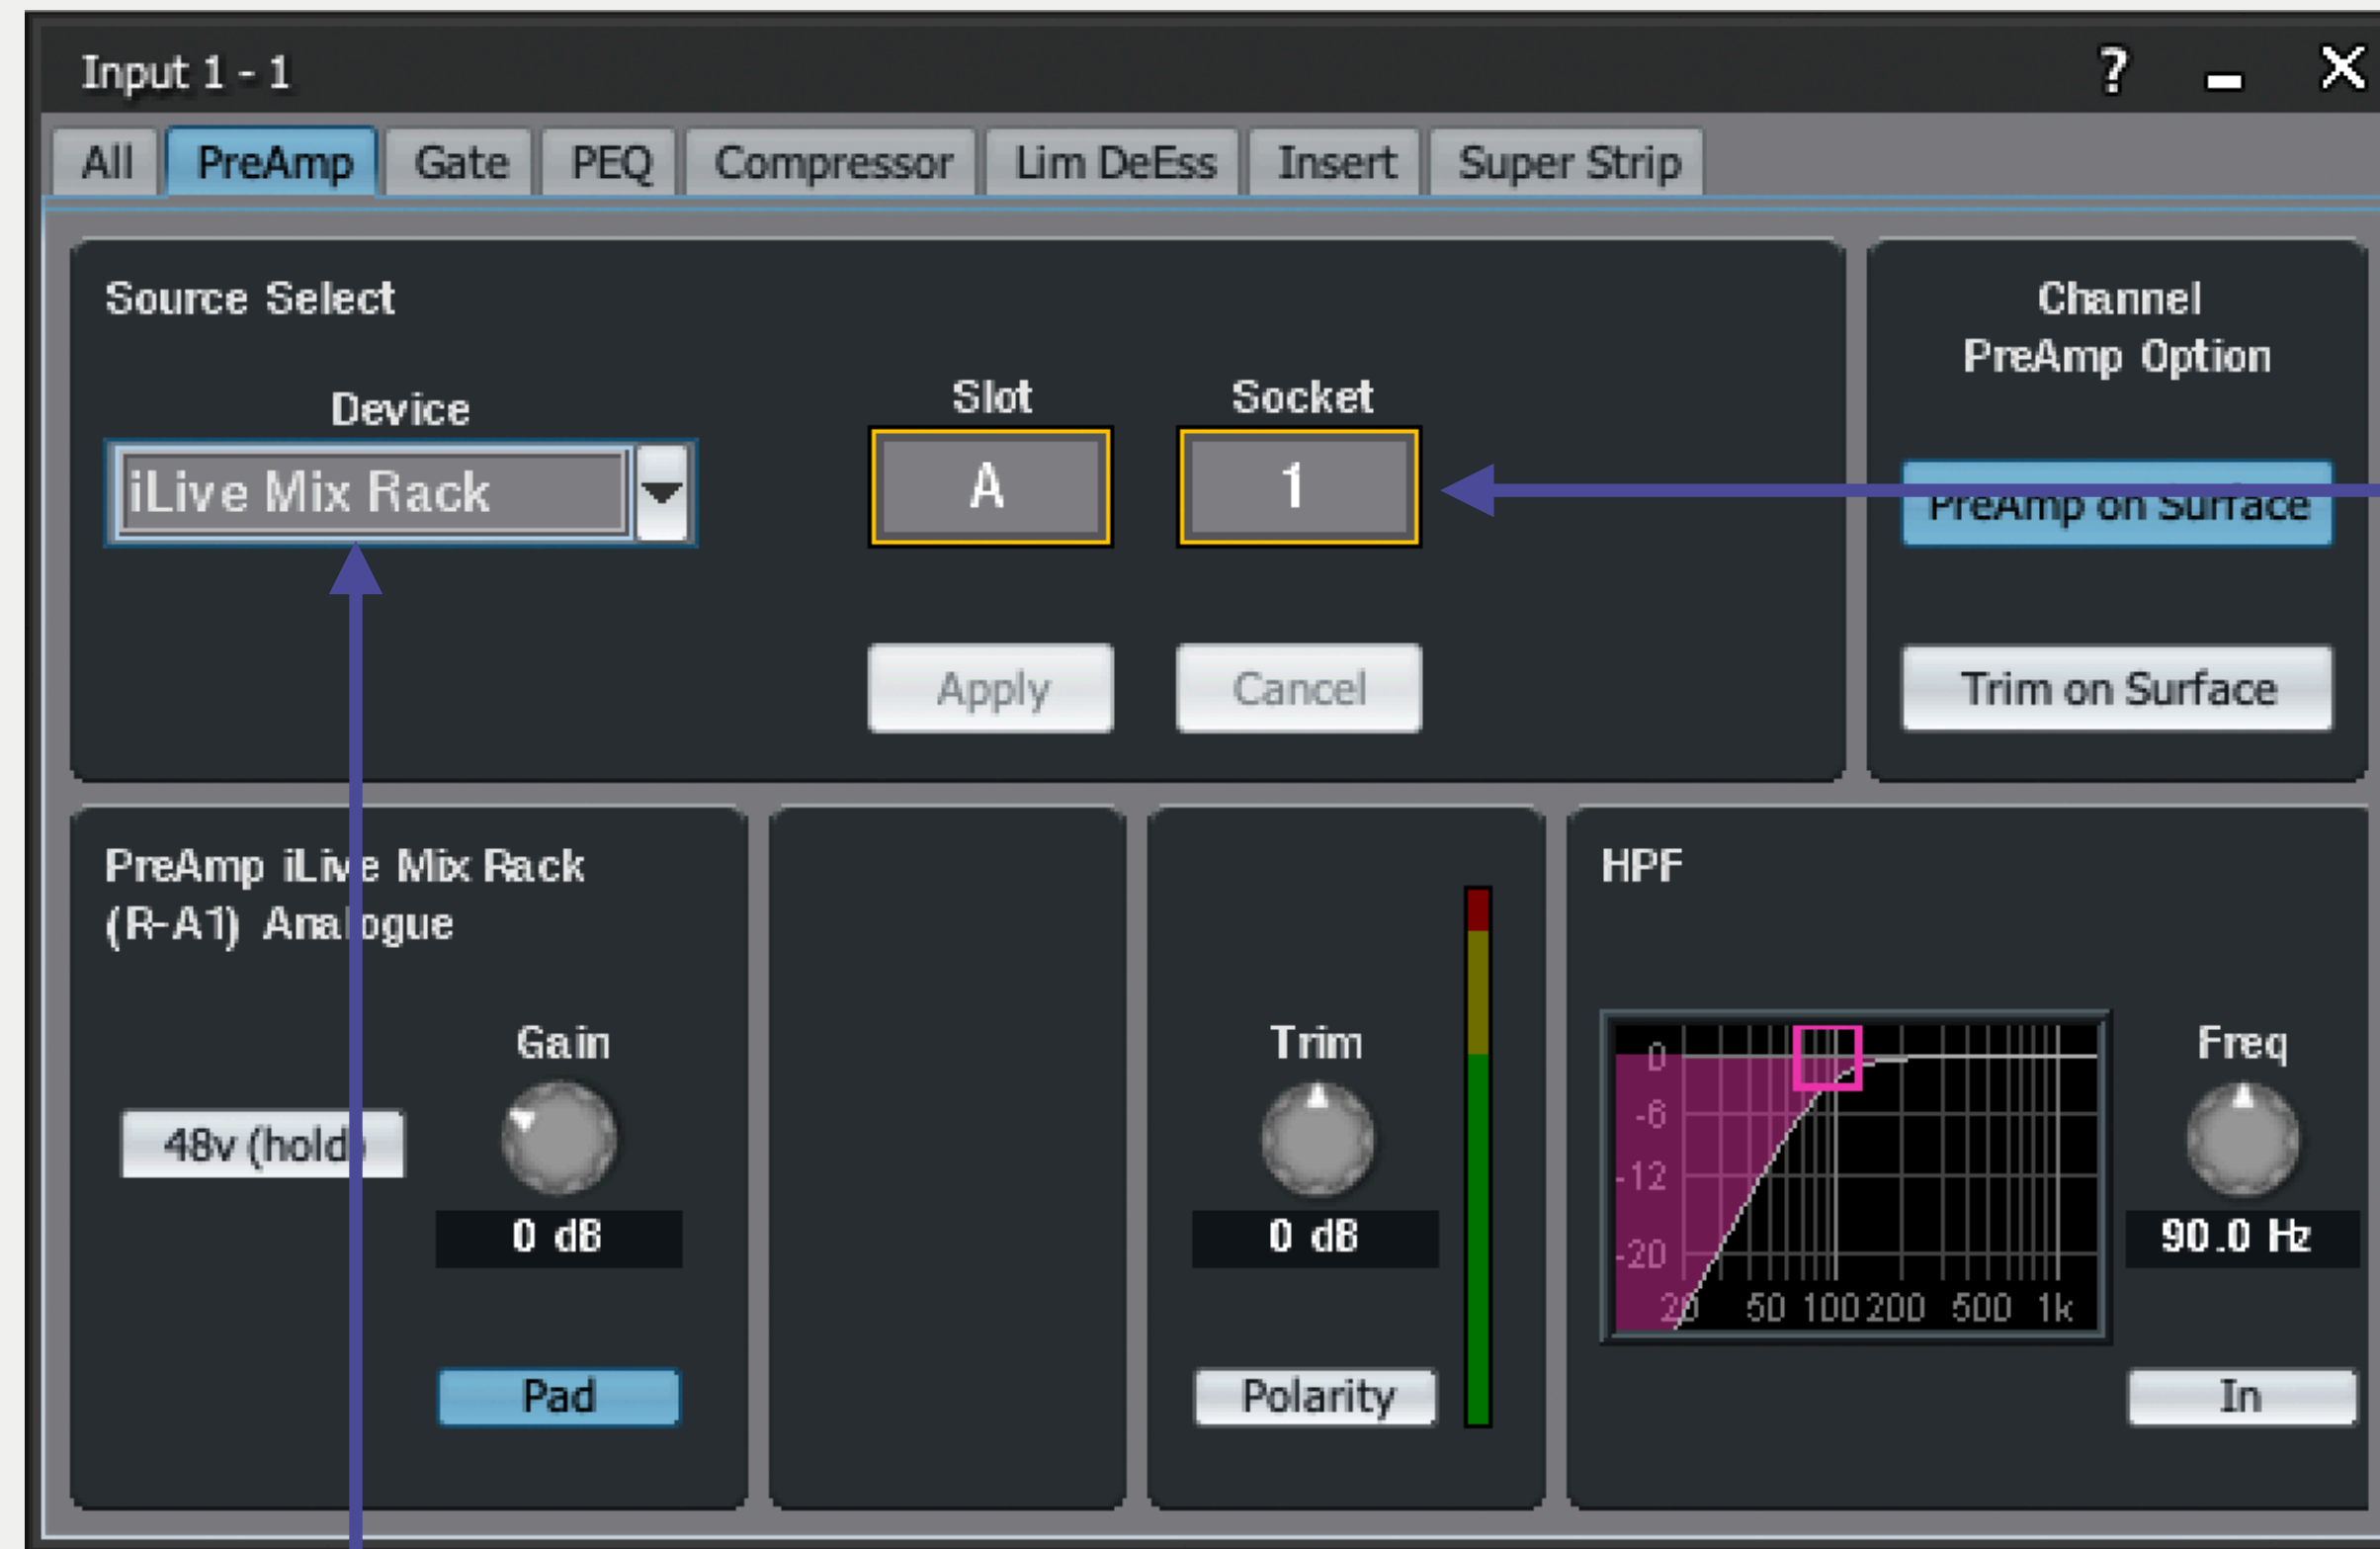

zugewiesene Quelle

ausgewähltes Gerät
(Mix Rack oder Surface)

A&H iDR SURFACE
INPUT CONFIG

A&H T112 Surface ROUTING

Master-Mix Selec – MIX (blue led lights up)

Status ON
channel is active
on assigned mix

Pre/Post + SEL
aux send pre-
or post fader



ASSIGN + MIX
assign or remove channel
to/from selected mix

selected
MIX

A&H iDR SURFACE
ROUTING ASSIGN



PREAMP

Source
48V Phantom
Gain/Pad
Polarity
HighPass
Insert

GATE

reduction
of signal level
below threshold

EQUALISER

Frequency-Processing

COMPRESSOR

reduction
signal levels
above threshold

LIMITER DE-ESSER

limiting
signal peaks
/sibilance

CHANNEL STRIP

TUTORIAL CONNECTING SOURCE

Connect source according to signal type

e.g.: Mic per balanced XLR cord

Laptop per unbalanced 3.5mm minjack to 2x 6,3mm jack etc.

Assign Mixing Desk Channel & Adjust Gain

Select a channel & the physical source connection in the *Preamp* section

48V Phantompower needed? (typ. condenser mics + active DI boxes)

Adjust gain while source is playing *nominal* level (speaking into mic, audio playback from laptop @full volume) for ~12dB headroom = 0dB @A&H meter

Acoustic control via *PFL* (*Pre Fade Listen*) + Headphones

Output via PA System

Assign output (e.g.: default routing to Main Out L+R)

TUTORIAL PROCESSING SOURCE IN CHANNEL STRIP

PREAMP-Section

Suitable Gain

Highpassfilter close to lowest signal-frequency

GATE-Section

Mostly needed for miced acoustic sources; reduction of signal pauses to reduce spillover and noise floor

EQ-Section

As needed (feedback reduction, artistic control); details to come AUP3 Lecture 8

Dynamics/Limiter/De-Esser-Section

As needed (volume control); details to come AUP3 Lecture 7

TUTORIAL SIGNAL ROUTING

Serial Routing to outputs or groups

Main Out L/R (Master): direct output via PA-speakers

Group (Subgroup): summing of single channels of an instrument / signal group (e.g.: drumset, choire, keyboards, strings/brass-ensemble, FX-returns etc.)

group-channel also offers EQ & dynamics for simultaneous processing

Parallel Routing for monitoring or effects

Pre-Fade Aux-Send: output to stage monitor speakers or In-Ear Systems

(Send level independent from channel fader. Monitor Level stays constant)

Post-Fade Aux-Send: routing to effects (external/internal)

(Send level depends on channel fader. Effektlevel adjusts with channel volume)

DCA-Groups (Digital Controlled Amplifier)

Grouping of control elements (volume, mute-groups, etc.)