



THE INSTITUTE OF NAVIGATION

8551 Rixlew Lane, Ste. 360

Manassas, VA 20109-3701

PHN: (703) 366-2723/FAX: (703) 366-2724

WWW.ION.ORG

Global Navigation Satellite Systems

Software Defined Radio

Sampled Data

Metadata Standard

Revision 1.0

ION GNSS SDR Standard Working Group

Abstract

The Global Navigation Satellite Systems (GNSS) Software Defined Radio (SDR) Metadata Standard defines parameters and schema to express the contents of SDR sampled data files. The standard is designed to promote the interoperability of GNSS SDR data collection systems and processors. The standard includes a formal XML schema definition (XSD). A compliant open source C++ applications programming interface (API) is also officially supported to promote ease of integration into existing SDR systems.

Table of Contents

1	Introduction.....	6
2	Scope.....	6
3	Metadata Format.....	6
4	SDR Data Collection Topologies.....	6
4.1	Single Band, Single Stream, Single File / Multiple Files	7
4.2	Multi-Band, Single Stream, Single File.....	7
4.3	Multi Stream, Single File.....	8
4.4	Multi Stream, Single File (with Additional Data)	8
4.5	Temporal Splitting of Files	8
4.6	Spatial Splitting of Files	9
4.7	Spatial-Temporal Splitting of Files.....	9
5	Metadata File Naming and Association Mechanisms.....	9
6	Domain Model	9
6.1	Architecture.....	10
6.2	Core classes.....	11
6.2.1	Session object.....	11
6.2.2	System object.....	12
6.2.3	Cluster object	12
6.2.4	Source Object.....	13
6.2.5	Band object	14
6.2.6	Stream object	14
6.2.7	Lump object	17
6.2.8	Chunk object	18
6.2.9	Block object	19
6.2.10	Lane object.....	20
6.2.11	File object.....	21
6.2.12	FileSet Object.....	22
6.3	Foundation Classes	22
6.3.1	URI.....	22
6.3.2	DateTime.....	22
6.3.3	Frequency.....	22
6.3.4	Duration	22
6.3.5	Position	23
6.3.6	Origin	23
6.3.7	Orientation	24
7	Appendix:.....	25
	Encoding Functions	25

List of Figures

Figure 1 – Fundamental GNSS SDR Data Collection Topologies	7
Figure 2 – Overview of Core Metadata Classes and Generation.....	9
Figure 3 – GNSS metadata class model (UML 2.0)	10
Figure 4 – Core metadata classes specialize the base metadata element, which has a unique identifier (id), links to related artifacts (URI) and comments.....	10
Figure 5 – Intentional Aliasing of a Multiband signal to Baseband	14
Figure 6 – Illustration of Multiple Bands Present in a Stream	15
Figure 7 – Illustration of a lump containing samples from N streams.....	17
Figure 8 – Encoding schemes for a single lump within a single chunk.....	19

List of Tables

Table 1 – Metadata element class attributes	11
Table 2 – Definition of session attributes	11
Table 3 – Definition of system attributes	12
Table 4 – Definition of cluster attributes	13
Table 5 – Definition of source attributes	13
Table 6 – Definition of band attributes	14
Table 7 – Definition of stream attributes	16
Table 8 – Enumeration of stream encoding attribute	16
Table 9 – Definition of lump attributes	17
Table 10 – Definition of chunk attributes	18
Table 11 – Definition of block attributes	20
Table 12 – Definition of lane attributes	20
Table 13 – Definition of file attributes	21
Table 14 – Definition of fileSet attributes	22
Table 15 – Definition of position attributes	23
Table 16 – Definition of origin attributes	23
Table 17 – Definition of orientation attributes	24
Table 18 – Encoding of 2-bit samples	25
Table 19 – Encoding of 3-bit samples	25
Table 20 – Encoding of 4-bit samples	25
Table 21 – Encoding of 5-bit samples	26

List of acronyms

GNSS	Global navigation satellite system
IF	Intermediate frequency
PC	Personal computer
UML	Unified model language
URI	Universal resource identifier
RF	Radio frequency
RTC	Real time clock
SDR	Software defined radio
XSD	XML schema definition
XML	Extensible markup language

1 Introduction

The past several years has seen a proliferation of software defined radio (SDR) data collection systems and processing platforms that are particularly designed for Global Navigation Satellite System (GNSS) receiver applications or those that support GNSS bands. For post-processing, correctly interpreting the GNSS SDR sampled datasets produced or consumed by these systems has historically been a cumbersome and error-prone process. This is because these systems necessarily produce datasets of various formats, the subtleties of which are often lost in translation when communicating between the producer and consumer of these datasets. This specification standardizes the metadata associated with GNSS SDR sampled data files.

2 Scope

Datasets containing GNSS SDR samples may also contain other information such as sensor data and data from radio frequency (RF) bands other than GNSS. For non-RF data, this specification supports bypassing this data during reading. For non-GNSS RF bands, only parameters common to GNSS bands are supported.

3 Metadata Format

Extensible Markup Language (XML) is used in this standard. The XML schema is specified according to the XML Schema Definition (XSD) standard.

4 SDR Data Collection Topologies

This standard is designed to support most current and future GNSS SDR sampled data file formats. These formats stem from the fundamental data collection topologies illustrated in Figure 1. This section describes these topologies.

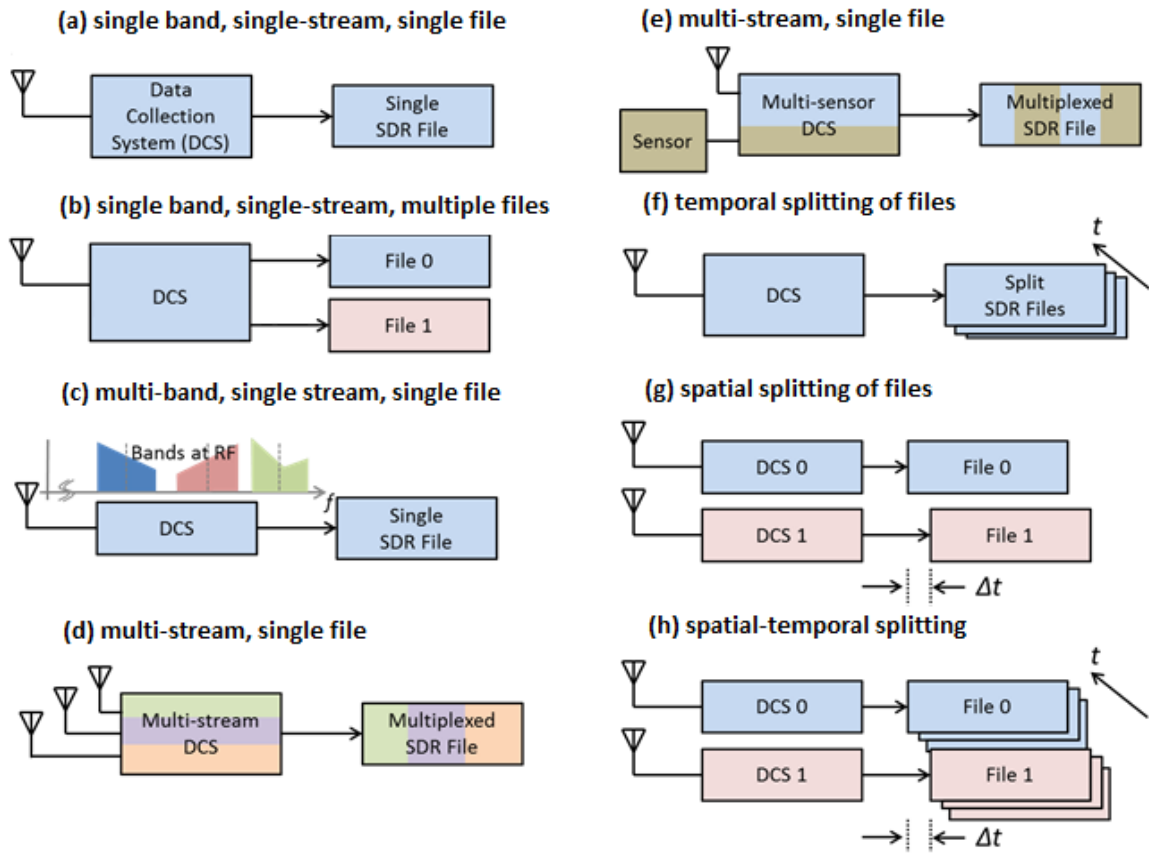


Figure 1 – Fundamental GNSS SDR Data Collection Topologies

4.1 Single Band, Single Stream, Single File / Multiple Files

Figure 1.a illustrates the simplest data collection topology that can exist. This is when a single contiguous region of RF spectrum (referenced henceforth as a ‘band’) is down-converted and sampled to produce a single data stream that is then written to a single data file.

For this and all subsequent topologies, the data stream may contain samples that are either real or complex valued depending on whether intermediate frequency (IF) or baseband sampling is used, respectively. These samples are packed according to a repetitive pattern. The repetitive pattern may also comprise of other information at the beginning and/or end of a fixed number of samples. This may include non-sample data such as headers and footers which, for example, may be used for data integrity check purposes. In this topology, this formatted data stream is written to one and only one file. However, some systems prefer to write the formatted data stream into several data files as shown in Figure 1.b.

4.2 Multi-Band, Single Stream, Single File

Figure 1.c is identical to Figure 1.a in terms of how the data stream may be formed and written to disk, except the data stream contains information from more than one RF band. An example of this topology is a direct RF sampling front-end architecture that intentionally aliases multiple

bands such that they appear next to each other at baseband. In this case, some bands may be spectrally inverted as a result of the digital down-conversion process.

4.3 Multi Stream, Single File

Figure 1.d illustrates a topology where multiple sample streams are combined into a single formatted data stream and written to a single file. The formatted data stream may contain additional information as described in 4.1. Each sample stream represents a distinct time series that is independent from any and all others (i.e. independent in a mathematical time series sense, not in a statistical sense).

NOTE:

The distinction of sample stream (i.e. mathematical time series) versus data stream (i.e. formatted data bytes that are ultimately written to disk) is made above. In this standard, the term *stream* shall always imply the former. The term *data stream* shall be used specifically to refer to the latter.

In the example shown, each sample stream represents the data collected from a different antenna whose signal passes through a different RF front-end channel. This is for illustration purposes only. The standard does not assume any dependence between streams (including common sample rates or quantization).

4.4 Multi Stream, Single File (with Additional Data)

Figure 1.e illustrates a data stream containing GNSS samples as well as data from an additional sensor. For the purpose of this standard, any data that cannot be represented as GNSS sample streams are considered unknown data. The standard defines parameters necessary to skip over unknown data bytes when decoding the data stream.

The remaining topologies (Figure 1.f - Figure 1.h) address how a data stream may be written to disk.

4.5 Temporal Splitting of Files

The data rates of GNSS SDR streams are typically high (on the order of one to several hundred MB/sec). Hence, long-duration data collections can generate very large files that become cumbersome to manage. For this reason, the data may be written to smaller sets of files (illustrated in Figure 1.f) where the data stream continues from the end of one file to the beginning of another (possibly with some overlap to ensure data integrity). This is defined as *temporal file splitting* in this standard. The standard includes parameters that specify the order of temporally split files.

NOTE:

A metadata file typically exists for each data file. Optionally, all information for a multi-file set may be contained within one metadata file. For the former case, the first metadata file of a set must contain or make reference to the complete set of metadata parameters and subsequent files may contain only those that change from file to file.

4.6 Spatial Splitting of Files

A collection system or setup may write individual data streams or the frequency bands to multiple files (illustrated in Figure 1.g). These files may be written within the same host system (such as a personal computer (PC)) or multiple systems. This is defined as *spatial file splitting* in this standard.

NOTE:

This standard associates two or more spatially split files in a specification defined as *fileSet*.

4.7 Spatial-Temporal Splitting of Files

Figure 1.h illustrates the combination of spatial and temporal splitting. In this case, the *fileSet* parameter refers to the first of each temporally split file.

5 Metadata File Naming and Association Mechanisms

The official filename extension for a metadata file is ‘.sdrx’. Use of this extension is recommended.

6 Domain Model

As illustrated in Figure 2, metadata are defined in terms of 12 core classes, represented in the orange boxes. These core classes are explained in the different subsections within this chapter.

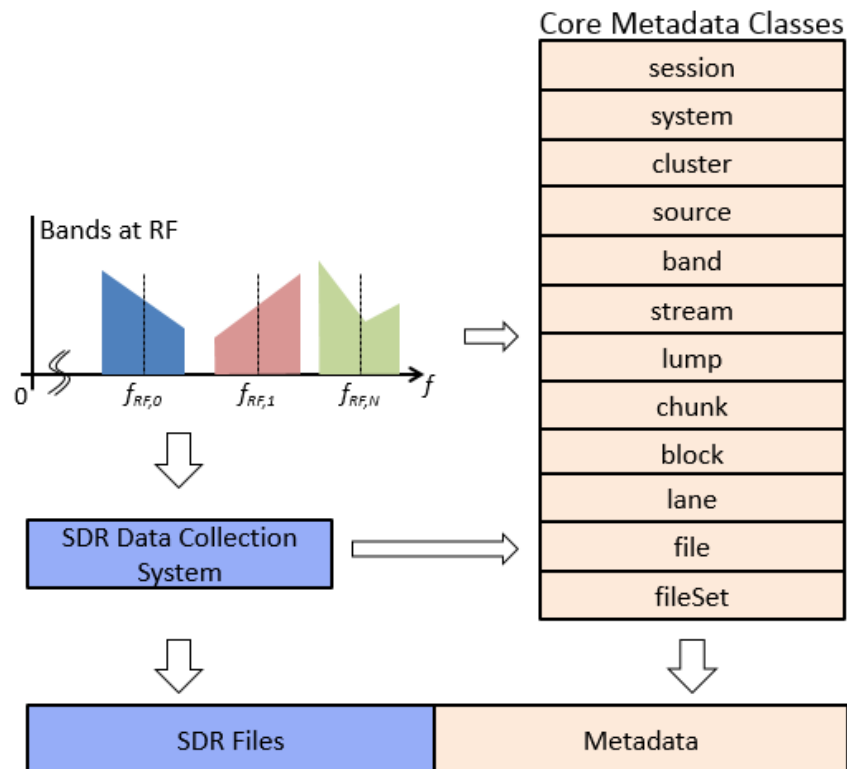


Figure 2 – Overview of Core Metadata Classes and Generation

6.1 Architecture

Figure 3 and Figure 4 show the relation of the different core classes. This relation is shown between the different core classes (Figure 3), and between the core classes and the main class (Figure 4), namely *metadata*.

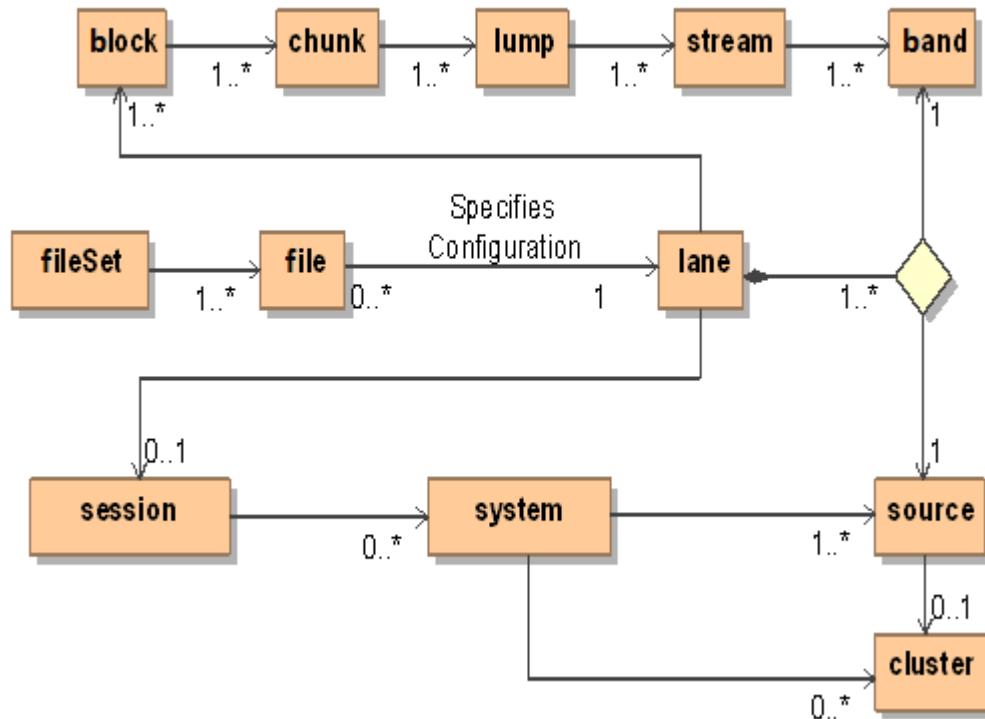


Figure 3 – GNSS metadata class model (UML 2.0)

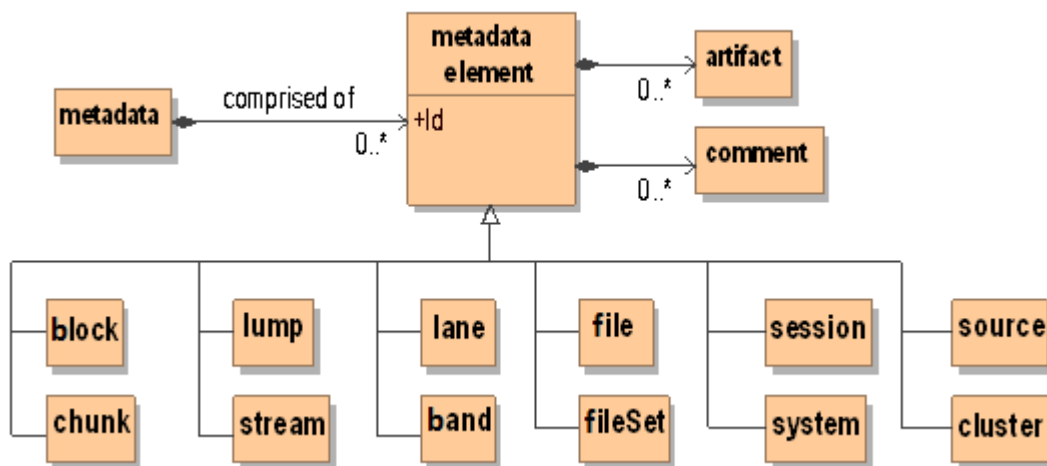


Figure 4 – Core metadata classes specialize the base metadata element, which has a unique identifier (id), links to related artifacts (URI) and comments

All metadata objects contain the following attributes:

- **artifact**: One or more generic attributes
- **comment**: one or more comment strings
- **id**: an identification string that is used to reference a child object by the parent

Table 1 describes the attributes of the metadata element class. Core metadata classes specialize the base metadata element. It encapsulates a unique identifier (id), links to related artifacts (URI) and comment strings.

Table 1 – Metadata element class attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
id	Unique identifier	string		Yes	""
artifact	Zero or more link specifications to information pertaining to the class instance. Can be any URI formatted information	URI		Yes	
comment	Zero or more text/html comments providing additional detail regarding the class instance.	string		Yes	

6.2 Core classes

6.2.1 Session object

A session is defined as a utilization instance of a pre-configured system for a period devoted to a particular activity.

Table 2 – Definition of session attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
toa	Time of applicability for all position and attitude parameters	dateTime ¹		No	
position	Platform position at toa expressed in Geoid frame	position		No	
system	The system used for this session	system		No	
poc	Point of contact. Name of person or entity.	string		No	
contact	POC contact information (email)	string		No	
Campaign	Data collection campaign	string		No	
Scenario	Specific scenario for this collection	string		No	

¹ https://www.w3schools.com/xml/schema_dtypes_date.asp

6.2.2 System object

A system is defined as a complete data collection apparatus. The system comprises all antennas, sensors, and other information-outputting equipment down to the disk arrays that store SDR files. The system may also include GNSS signal simulators. The standard includes geometrical parameters (position and orientation) to the extent that this information is necessary for post-processing the SDR data stream. For example, initial position and platform orientation may be needed for a dynamic scenario. The relative position and orientation of antennas and their elements with respect to the platform coordinate frame are needed for adaptive antenna signal processing.

Table 3 – Definition of system attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
source	One or more sources of sampled data.	source		No	
cluster	Zero or more clusters of antenna sources	cluster		No	
freqbase	Base frequency. All sampling frequencies are specified as an integer multiple of freqbase	frequency		Yes	
equipment	Equipment used for this data collection	string		No	

6.2.3 Cluster object

Data collection setups may contain one or more antenna units where each antenna unit may comprise one or more elements. The position and orientation of each element's phase center and the relative delay must be known in order to perform multi-element signal processing. Hence, it is convenient to include these parameters directly as metadata. The standard defines the generic terms *cluster* and *source* to refer to an antenna unit and its elements respectively.

A cluster is defined as a grouping of sources. A coordinate frame is associated with a cluster. The origin and orientation of this frame is specified with respect to the platform coordinate frame.

Table 4 – Definition of cluster attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
id	Unique identifier	string		No	
position	Origin of cluster reference frame w.r.t. platform coordinate frame	position		No	
orientation	Orientation of cluster frame w.r.t. platform frame	orientation		No	
vendor	Vendor name	string		No	
model	Model number	string		No	
serial	Serial number	string		No	

6.2.4 Source Object

A source is defined as the originator of an electrical signal. A coordinate frame is associated with a cluster. The origin and rotation of this frame is specified with respect to the platform coordinate frame.

Table 5 – Definition of source attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
id	cluster that this source belongs to	string		No	
type	Electrical type of this source	enumerator	"UndefinedType", "Patch", "Dipole", "Helical", "Quadrifilar", "Simulator", "Other"	No	"UndefinedType"
polarization	Element polarization	enumerator	"UndefinedType", "RHCP", "LHCP", "Linear", "Horizontal", "Vertical"	No	"UndefinedType"
origin	Origin with respect to cluster	position		No	
orientation	Orientation of normal vector to this source plane w.r.t. cluster	orientation		No	

6.2.5 Band object

A band is defined as a span of RF spectrum. Each band is received from a single source and converted to a sample stream by a signal processor that is typically referred to as an RF front-end. This analog signal represented by the band experiences the following changes as it passes through this mixed-signal processing chain:

- The RF center frequency, F_{RF} , is translated to F_{IF}
- The spectrum may become inverted such that the frequency $F_{RF}+dF$ is translated to $F_{IF}-dF$, where dF is a frequency offset from F_{RF} .
- The sampled representation of the band is delayed with respect to the signal incident at the phase center of the source (i.e. antenna element). This delay may vary with time, and is hence defined at the system time of applicability, toa .
- An approximate double-sided half power bandwidth can be specified for the stream representation of the band.

The above are specified in terms of band attributes.

Table 6 – Definition of band attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
centerfreq	Center frequency of band incident at source	frequency		Yes	
translatedfreq	Translated center frequency of band	frequency		Yes	
inverted	Binary flag indicating spectral inversion	boolean	"true", "false"	No	"false"
delaybias	Delay of band measured from source to sampled stream, specified at toa .	duration		No	0
bandwidth¹	Approximate double-sided half power bandwidth	frequency		No	

¹ Bandwidth is measured by processing the sample stream. For streams containing multiple bands, it is recommended that other bands be muted to measure a given bandwidth.

6.2.6 Stream object

A frequency-translated signal may contain more than one band. For example, in a direct RF sampling front-end, the sample rate may be chosen such that multiple passbands are intentionally aliased to fall adjacent to one another in the spectrum of the sampled signal. This is illustrated in Figure 5.

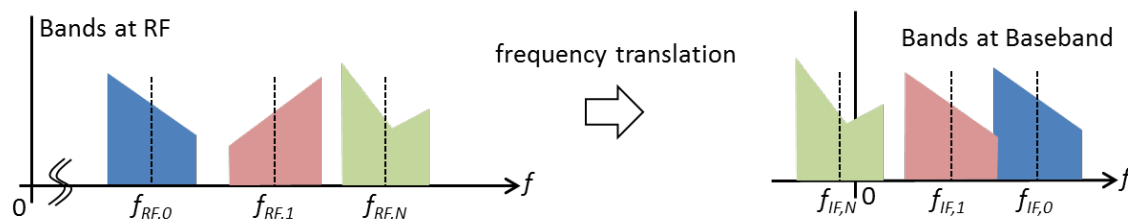


Figure 5 – Intentional Aliasing of a Multiband signal to Baseband

Figure 6 illustrates the conceptual representation of the digitization of a signal containing multiple bands. The output of this process is a sampled representation of the multi-band signal referred to as a sample stream.

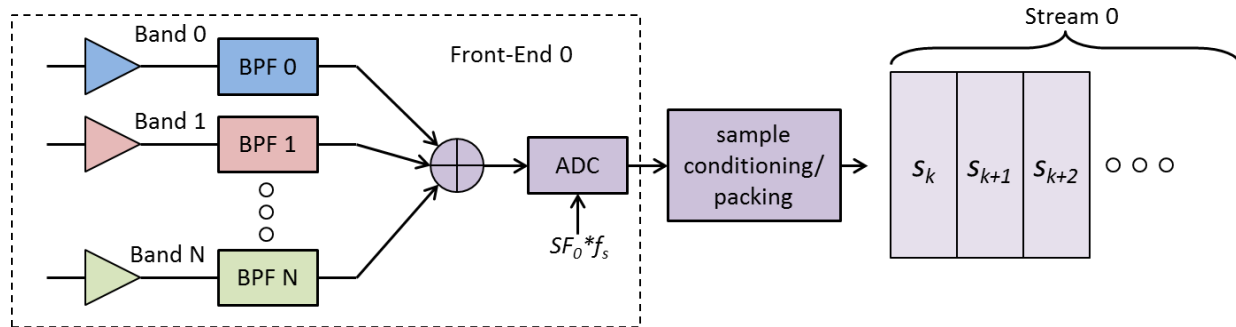


Figure 6 – Illustration of Multiple Bands Present in a Stream

A (sample) stream is defined as a discrete-time discrete-amplitude series that is the sampled representation of a combination of one or more bands.

A stream has the following properties:

- The stream contains the sampled representation of one or more bands.
- A stream is sampled at a given sample rate. This sample rate may be different to other streams in the system. The sample rate of a stream is specified as an integer multiple (ratefactor) of the system base sample rate (freqbase). As such, freqbase should represent the highest common integer factor of the sample rates of all streams.
- Sample values may be real or complex depending on whether IF sampling or baseband sampling is used, respectively. Some or all the numerical values expressed in the stream may be inverted.
- Each sample value is represented by one or more bits which may be encoded using various established schemes. The value quantization should reflect the number of bits required to express all quantization levels, being rounded up when the number of quantization levels is not a power of two (i.e. three-level quantization requires two bits).
- The value packedbits represents the total number of bits occupied by the collection of samples contained in a chunk (the chunk is a segment of data packed in one of the unsigned integer standards, a more accurate description of the chunk is given in section 6.2.8) in the stream where:

$$\text{packedbits} \geq \text{ratefactor} \times \text{quantization},$$
for real data, and:

$$\text{packedbits} \geq 2 \times \text{ratefactor} \times \text{quantization},$$
for complex data.
- When inequality holds, the alignment of the quantized samples with respect to the packed samples must be known in order to interpret the sample values correctly.

The above are specified in terms of stream attributes.

Table 7 – Definition of stream attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
band¹	One or more bands present in this stream	band		Yes	
ratefactor	Sample rate factor	uint16_t		Yes	
quantization	Sample quantization (bits)	uint8_t		Yes	
packedbits	Packed representation (bits)	uint8_t		Yes	
alignment	Sample alignment	enumerator	"Left", "Right", "Undefined"	Yes	
shift	Shift direction	enumerator	"Left", "Right", "Undefined"	Yes	
format	Sample representation	enumerator	"IF", "IFn", "IQ", "IQn", "InQ", "InQn", "QI", "QIn", "QnI", "QnIn" (where 'n' signifies inversion)	Yes	
encoding	Numeric encoding scheme	enumerator	See Table 8	Yes	

¹ Multiple instances of these parameters may exist. The parser shall enumerate accordingly

Table 8 – Enumeration of stream encoding attribute

XML String	Description
"SIGN"	Sign
"OB"	Offset-Binary
"SM"	Sign-Magnitude
"TC"	Two's Compliment
"OG"	Offset-Gray Code
"OBA"	Offset-Binary Adjusted
"SMA"	Sign-Magnitude Adjusted
"TCA"	Two's Compliment Adjusted
"OGA"	Offset-Gray Code Adjusted

6.2.7 Lump object

Samples from two or more sample streams may be time multiplexed to form a single data stream that is ultimately written to disk (after additional formatting is applied, as described later in this document). This standard assumes that all samples belonging to a finite interval of time are packed into a contiguous grouping of bits, known as a lump.

A lump is defined as the ordered containment of all samples occurring within an interval $t_s=1/f_s$. As more than one sample from each stream may exist within a given lump, the variable *shift* indicates which sample is chronologically first. When *shift* is set to “Left” the samples located at the most significant bits are the earliest, and when it is set to “Right” the samples located at the least significant bits are the earliest.

Figure 7 illustrates a lump containing all samples from N sample streams.

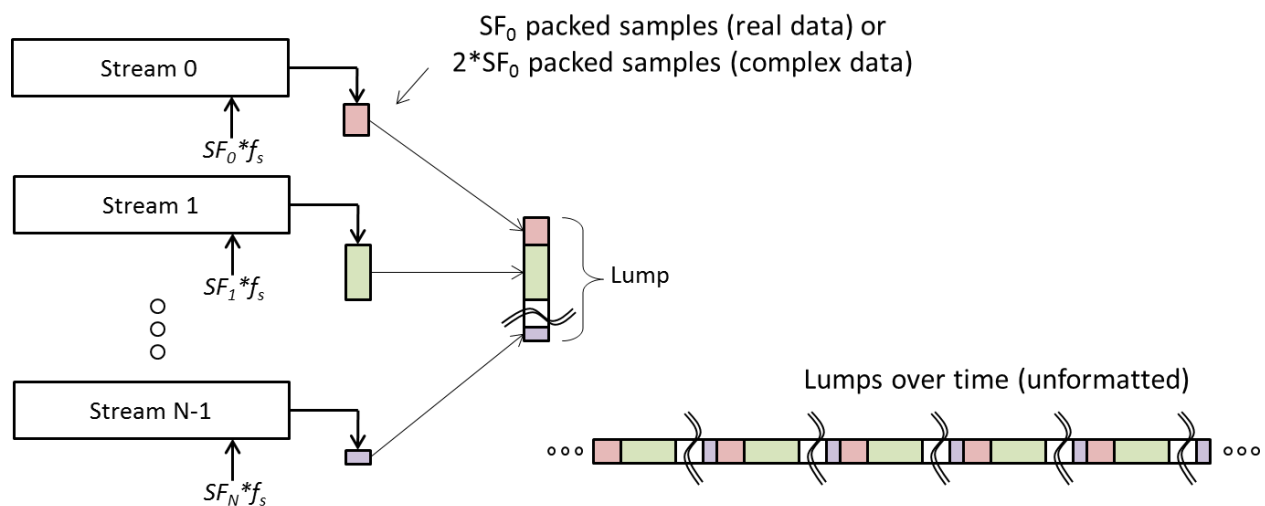


Figure 7 – Illustration of a lump containing samples from N streams

Table 9 – Definition of lump attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
stream	One or more streams present in this lump (ordered).	stream		No	
shift	Shift direction.	enumerator	“Left”, “Right”	No	

6.2.8 Chunk object

The packing scheme of samples in a data stream must be known to correctly decode them. For example, consider 32 1-bit real samples packed into two uint16_t words represented in little-endian format. Due to the little-endian representation, these samples will be decoded incorrectly if read back as a single uint32_t word and shifted out. Further, some systems pack samples from left to right within a word whereas others perform the opposite.

This standard defines a metadata parameter known as a chunk that together with stream and lump parameters unambiguously describes how samples shall be decoded from a data stream.

A chunk is defined as a segment of data consisting of one or more lumps that have been packed using one of four standard unsigned integer data types (uint8, uint16, uint32, or uint64). This provides a means of describing the occupied memory in a manner that can be natively manipulated by a processor, using standard memory structures (char, int, array).

Table 1011 – Definition of chunk attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
lump	One or more lumps	lump		Yes	
sizeword	The size, in bytes, of the fundamental integer data-type (word) that shall be read.	uint8_t	1, 2, 4, 8 (Corresponds to uint8_t, uint16_t, uint32_t and uint64_t)	Yes	
countwords	Total number of words to be read in order to read/decode this chunk	uint8_t		Yes	
endian	Endianness of words stored in chunk	enumerator	"Big", "Little", "Undefined"	No	"Little"
padding	Padding applied during encoding	Enumerator	"None", "Head", "Tail"	No	"None"
wordshift	Shift direction	Enumerator	"Left", "Right"	yes	

Figure 8 illustrates four different schemes where a single 7-bit lump may be encoded within a chunk. The number of bits of information contained within a lump (and hence the number of bits to discard while decoding a chunk – shown as whitespace) is determined implicitly by parsing the referenced lump and stream parameters.

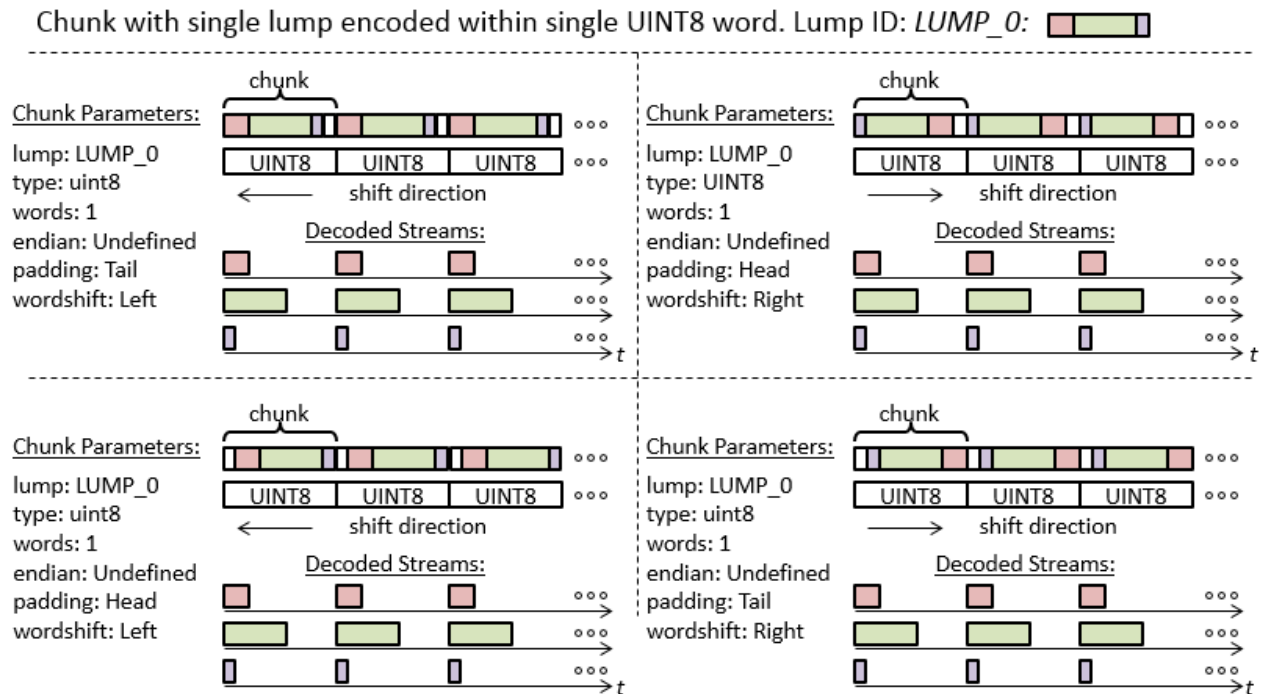


Figure 8 – Encoding schemes for a single lump within a single chunk

6.2.9 Block object

A data stream may contain other undefined bytes of information. This standard includes parameters necessary to skip over these bytes while decoding sample streams. This information is contained within a metadata object referred to as a block.

A block has the following properties:

- A block is comprised of a finite integer number of chunks greater than zero.
- Chunks within a block are sequential and contiguous.
- A block may begin with a data segment of arbitrary size (integer number of bytes) known as a *header*.
- A block may end with a data segment of arbitrary size (integer number of bytes) known as a *footer*.
- A block may contain data integrity features that are implemented within the header and/or footer segments.
- The block data structure shall remain constant for the entire data collection session (i.e. block format shall not change dynamically).

A block is defined as a data segment comprised of one or more chunks, where the chunk data appears contiguously anywhere within said segment.

Table 1213 – Definition of block attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
chunk	One or more chunks	chunk		Yes	
cycles	For the ordered chunk pattern described in the attribute chunk, the integer number of cycles that this pattern repeats within a block	uint32_t		Yes	
Sizeheader.	Integer number of bytes to skip in order to access first byte of chunk data	uint32_t		No	0
sizefooter	Integer number of bytes to skip in order to access first byte of next block	uint32_t		No	0

6.2.10 Lane object

A lane is defined as a conduit that transports data comprised of one or more types of blocks. The contents of one or more lanes are written to disk to produce files. However, the standard does not assume that this writing is synchronized to the start of a block within a lane.

Table 14 – Definition of lane attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
block	One or types of blocks in this lane (in order)	block		Yes	
bandsrc	Associates predefined bands with sources	string		Yes	
session	Session information for this lane	session		Yes	
system	System information for this lane	system		Yes	

6.2.11 File object

A file is defined as the ordered collection of bytes retrieved from a single lane over a finite interval of time and stored in a digital media device.

When a lane is written to a file, it may or may not be synchronized to the start of a block. For this reason there may be a byte offset from the beginning of the file to the first byte of the first block. This offset may be different for each file.

The creation time of the file may be tagged as metadata. This time is typically obtained from the system RTC.

Table 1516 – Definition of file attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
url	Unique identifier for the file (path/filename)?	URI		Yes	
timestamp	Time the file was generated	dateTime		No	
offset	Byte offset to start of first Block	uint32_t		No	0
lane	Identifies which lane the data came from	lane		Yes	
previous	Name of previous file (for temporally split files)	URI		No	
next	Name of next file (for temporally split files)	URI		No	
owner	String specifying owner of this file	string		No	
copyright	Copyright information	string		No	

6.2.12 FileSet Object

For spatially and spatial-temporally split files, the file set must be identified. This is done by the FileSet parameters that identify the *first set of files*. All other information can be obtained by parsing the metadata of those files.

Table 17 – Definition of fileSet attributes

Attribute	Description	Class	Enumeration	Requires	Default (if not specified)
file	Names of files comprising the file set	URI		Yes, for spatial or spatial-temporal	

6.3 Foundation Classes

The domain object model foundation classes define basic types used by the core metadata elements.

6.3.1 URI

A Universal Resource Identifier (URI) defines a unique path (e.g. URL) for locating an associated resource. The URI type is used to enable specification in a XML compatible format.

6.3.2 DateTime

The dateTime string specifies the day of the year and the time in standard XML format. See https://www.w3schools.com/xml/schema_dtypes_date.asp

An example of the representation of this type of parameter is shown below, as a definition of the time of applicability (toa):

```
<toa>2014-12-30T22:38:54.905999999Z</toa>
```

In the example is possible to check the day of applicability (30th of December of 2014) and the time of applicability (22:38:54.905999999).

6.3.3 Frequency

Specifies frequency. Units can be Hz, kHz, MHz, or GHz. Format can be double or a ratio of the form 'xxxx.yyyy' where frequency = xxxx/yyyy where xxxx and yyyy are signed and unsigned 32-bit integers, respectively.

An example of the representation of this type of parameter is shown below, as a definition of the centerfreq parameter:

```
<centerfreq format="Hz">1227600000e+000</centerfreq>
```

In the example is possible to see that the center frequency of the received signal is 1227600000Hz, or 1.2276GHz.

6.3.4 Duration

Used for specifying an interval of time. Units include ns, us, ms, sec. Format is double. An example of the representation of this parameter type is shown:

```
<delaybias format="sec">0.0000000000000000e+000</delaybias>
```

6.3.5 Position

The position attribute is used to specify the location of the platform with respect to the Geoid. For a dynamic scenario, this is typically the initial location.

Table 18 – Definition of position attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
datum	Datum used for the Geoid	string	"WGS-84"	No	"WGS-84"
lat	The latitude coordinate of the position	double		Yes	
lon	The longitude coordinate of the position	double		Yes	
height	The height coordinate of the position	double		Yes	

An example of the position is shown:

```
<position lat="48.17154012" lon="11.80868949" height="576.860"/>
```

6.3.6 Origin

Represents the origin of a child reference frame with respect to the parent reference frame.

Table 19 – Definition of origin attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
lat	The latitude coordinate of the origin	double		Yes	
lon	The longitude coordinate of the origin	double		Yes	
height	The height coordinate of the origin	double		Yes	

6.3.7 Orientation

Orientation defines a rotation from a parent coordinate frame to a child frame (i.e. this frame). By default, the rotation is specified in terms of a [3 x 1] set of Euler angles. Other forms are supported by enumerating the class attribute (if it exists).

Table 20 – Definition of orientation attributes

Attribute	Description	Class	Enumeration	Required	Default (if not specified)
type	Type of rotation matrix used.	enumeration	"Euler"	No	"Euler"
value	Rotation values, in degrees (0,360)	double (x3)		Yes	

7 Appendix:

Encoding Functions

Below are examples of each of the sample encoding schemes which can be specified in the Stream attributed 'encoding' for a selection of bit widths including 2, 3, 4, and 5-bit digitization. The first column, entitled 'Binary' represents the binary data packed in the stream, MSB left, while the remaining columns represent the physical amplitude of the sample.

Table 21 – Encoding of 2-bit samples

Binary	OB	OBA	SM	SMA	TC	TCA	OG	OGA
00	-2	-3	0	1	0	1	-2	-3
01	-1	-1	1	3	1	3	-1	-1
10	0	1	0	-1	-2	-3	1	3
11	1	3	-1	-3	-1	-1	0	1

Table 22 – Encoding of 3-bit samples

Binary	OB	OBA	SM	SMA	TC	TCA	OG	OGA
000	-4	-7	0	1	0	1	-4	-7
001	-3	-5	1	3	1	3	-3	-5
010	-2	-3	2	5	2	5	-1	-1
011	-1	-1	3	7	3	7	-2	-3
100	0	1	0	-1	-4	-7	3	7
101	1	3	-1	-3	-3	-5	2	5
110	2	5	-2	-5	-2	-3	0	1
111	3	7	-3	-7	-1	-1	1	3

Table 23 – Encoding of 4-bit samples

Binary	OB	OBA	SM	SMA	TC	TCA	OG	OGA
0000	-8	-15	0	1	0	1	-8	-15
0001	-7	-13	1	3	1	3	-7	-13
0010	-6	-11	2	5	2	5	-5	-9
0011	-5	-9	3	7	3	7	-6	-11
0100	-4	-7	4	9	4	9	-1	-1
0101	-3	-5	5	11	5	11	-2	-3
0110	-2	-3	6	13	6	13	-4	-7
0111	-1	-1	7	15	7	15	-3	-5
1000	0	1	0	-1	-8	-15	7	15
1001	1	3	-1	-3	-7	-13	6	13
1010	2	5	-2	-5	-6	-11	4	9
1011	3	7	-3	-7	-5	-9	5	11
1100	4	9	-4	-9	-4	-7	0	1
1101	5	11	-5	-11	-3	-5	1	3
1110	6	13	-6	-13	-2	-3	3	7
1111	7	15	-7	-15	-1	-1	2	5

Table 24 – Encoding of 5-bit samples

Binary	OB	OBA	SM	SMA	TC	TCA	OG	OGA
00000	-16	-31	0	1	0	1	-16	-31
00001	-15	-29	1	3	1	3	-15	-29
00010	-14	-27	2	5	2	5	-13	-25
00011	-13	-25	3	7	3	7	-14	-27
00100	-12	-23	4	9	4	9	-9	-17
00101	-11	-21	5	11	5	11	-10	-19
00110	-10	-19	6	13	6	13	-12	-23
00111	-9	-17	7	15	7	15	-11	-21
01000	-8	-15	8	17	8	17	-1	-1
01001	-7	-13	9	19	9	19	-2	-3
01010	-6	-11	10	21	10	21	-4	-7
01011	-5	-9	11	23	11	23	-3	-5
01100	-4	-7	12	25	12	25	-8	-15
01101	-3	-5	13	27	13	27	-7	-13
01110	-2	-3	14	29	14	29	-5	-9
01111	-1	-1	15	31	15	31	-6	-11
10000	0	1	0	-1	-16	-31	15	31
10001	1	3	-1	-3	-15	-29	14	29
10010	2	5	-2	-5	-14	-27	12	25
10011	3	7	-3	-7	-13	-25	13	27
10100	4	9	-4	-9	-12	-23	8	17
10101	5	11	-5	-11	-11	-21	9	19
10110	6	13	-6	-13	-10	-19	11	23
10111	7	15	-7	-15	-9	-17	10	21
11000	8	17	-8	-17	-8	-15	0	1
11001	9	19	-9	-19	-7	-13	1	3
11010	10	21	-10	-21	-6	-11	3	7
11011	11	23	-11	-23	-5	-9	2	5
11100	12	25	-12	-25	-4	-7	7	15
11101	13	27	-13	-27	-3	-5	6	13
11110	14	29	-14	-29	-2	-3	4	9