


Default Versa with oscillator: Include FB12,C41,B56,B57,X2. Include R36,R38 if required by oscillator. Exclude J3,J4,C42.
Versa with crystal: Include X2 as crystal, B57,J4,J3 as jumper, C42,R38 as 15pF. Exclude FB12,C41,B56,R36.
External clock: Configure U6 for CLKIN input and correct ratio, drive CL1 or CL5 with external clock.
Other experimental options possible with uFL connectors. See RF Frontend sheet for additional AD9866 clock options.

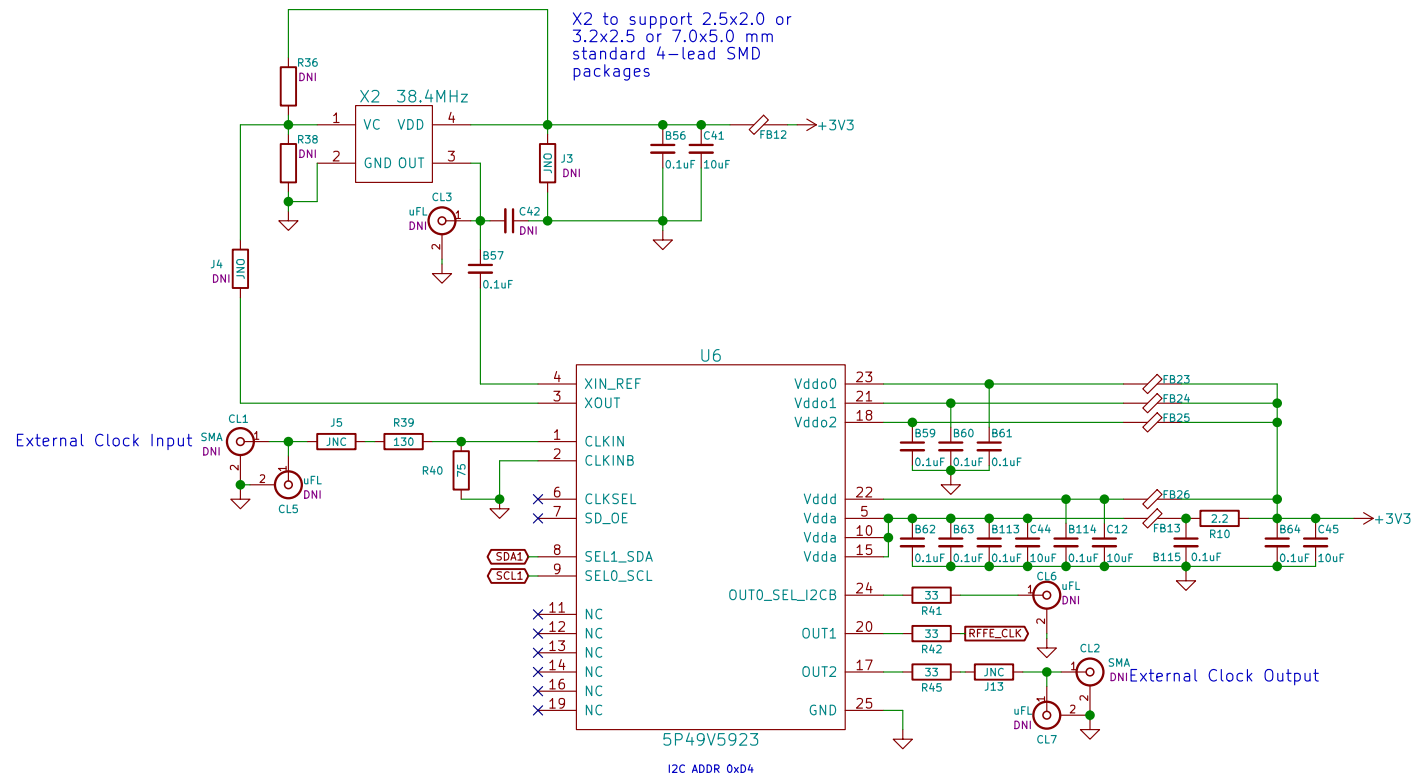

KF70 Steve Haynal

SofterHardware

Sheet: /Clock/

File: Clock.sch

Title: Clock

Size: USLetter	Date: 2017-10-25
----------------	------------------

Size: USLetter	Date:
KiCad E.D.A. kicad 4.0.6	

Rev: 2.0-beta5

Id: 4/7

