

1


2

3

4



CRITICAL DIMENSION

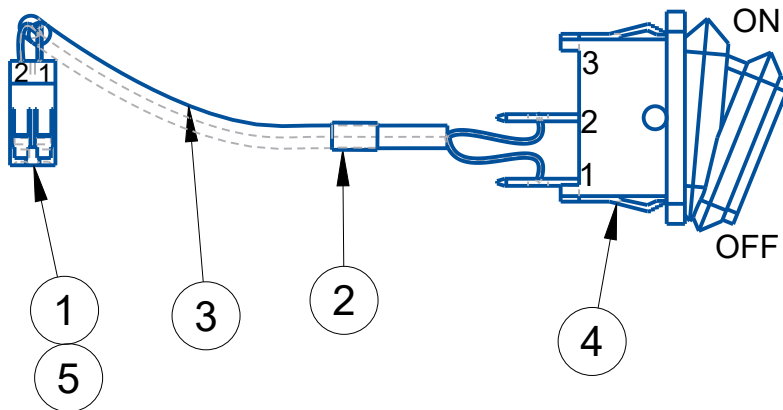


Notes

1. This assembly must have material compliance recognized by UL
2. Contact & Connector housing must be from the same manufacturer
3. Stripping & Crimping instructions, use qualified connector
Manufacturer individual instructions

Pin Configuration



Switch Pin #	Connector Pin #
1	2
2	1

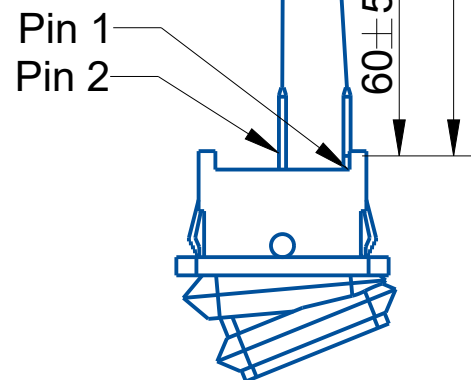

Reference details for wiring and marking

S.No	Open Cellular Part #	Manufacturer Part #	Description	Manufacturer	Quantity
1	213-000140	DF1B-2S-2_5R	2.5 Pitch 2 Pin Wire Connector	HIROSE	1
2	213-000139	-	Marking tube	BRADY	1
3	207-000293	-	Semi-flexible cable 24/26/28 AWG	-	1
4	213-000150	KRE2ANA	Single Pole ON/OFF Rocker Switch Non Lighted	CHERRY	1
5	213-000138	DF1B-2428SCFA	Crimp Contacts	HIROSE	2

02		Updated the cable length to 100mm	07/20/2017
01		DRAFT RELEASE	30/11/2016
REV	CRQ NO	DESCRIPTION	RELEASED DATE

FINISH SPECIFICATION		NA	
MATERIAL SPECIFICATION		REFER TABLE	
UNLESS OTHERWISE SPECIFIED LINEAR TOL =NA ANGULAR TOL=NA SURFACE FINISH TOL=NA		 OpenCellular	DOCUMENT CODE PART DRAWING
		PART NAME	POWER SWITCH CABLE ASSEMBLY
UNIT mm		PART NO	233-000039
SHEET SIZE A4			SCALE 1.200
			SHEET 1/1