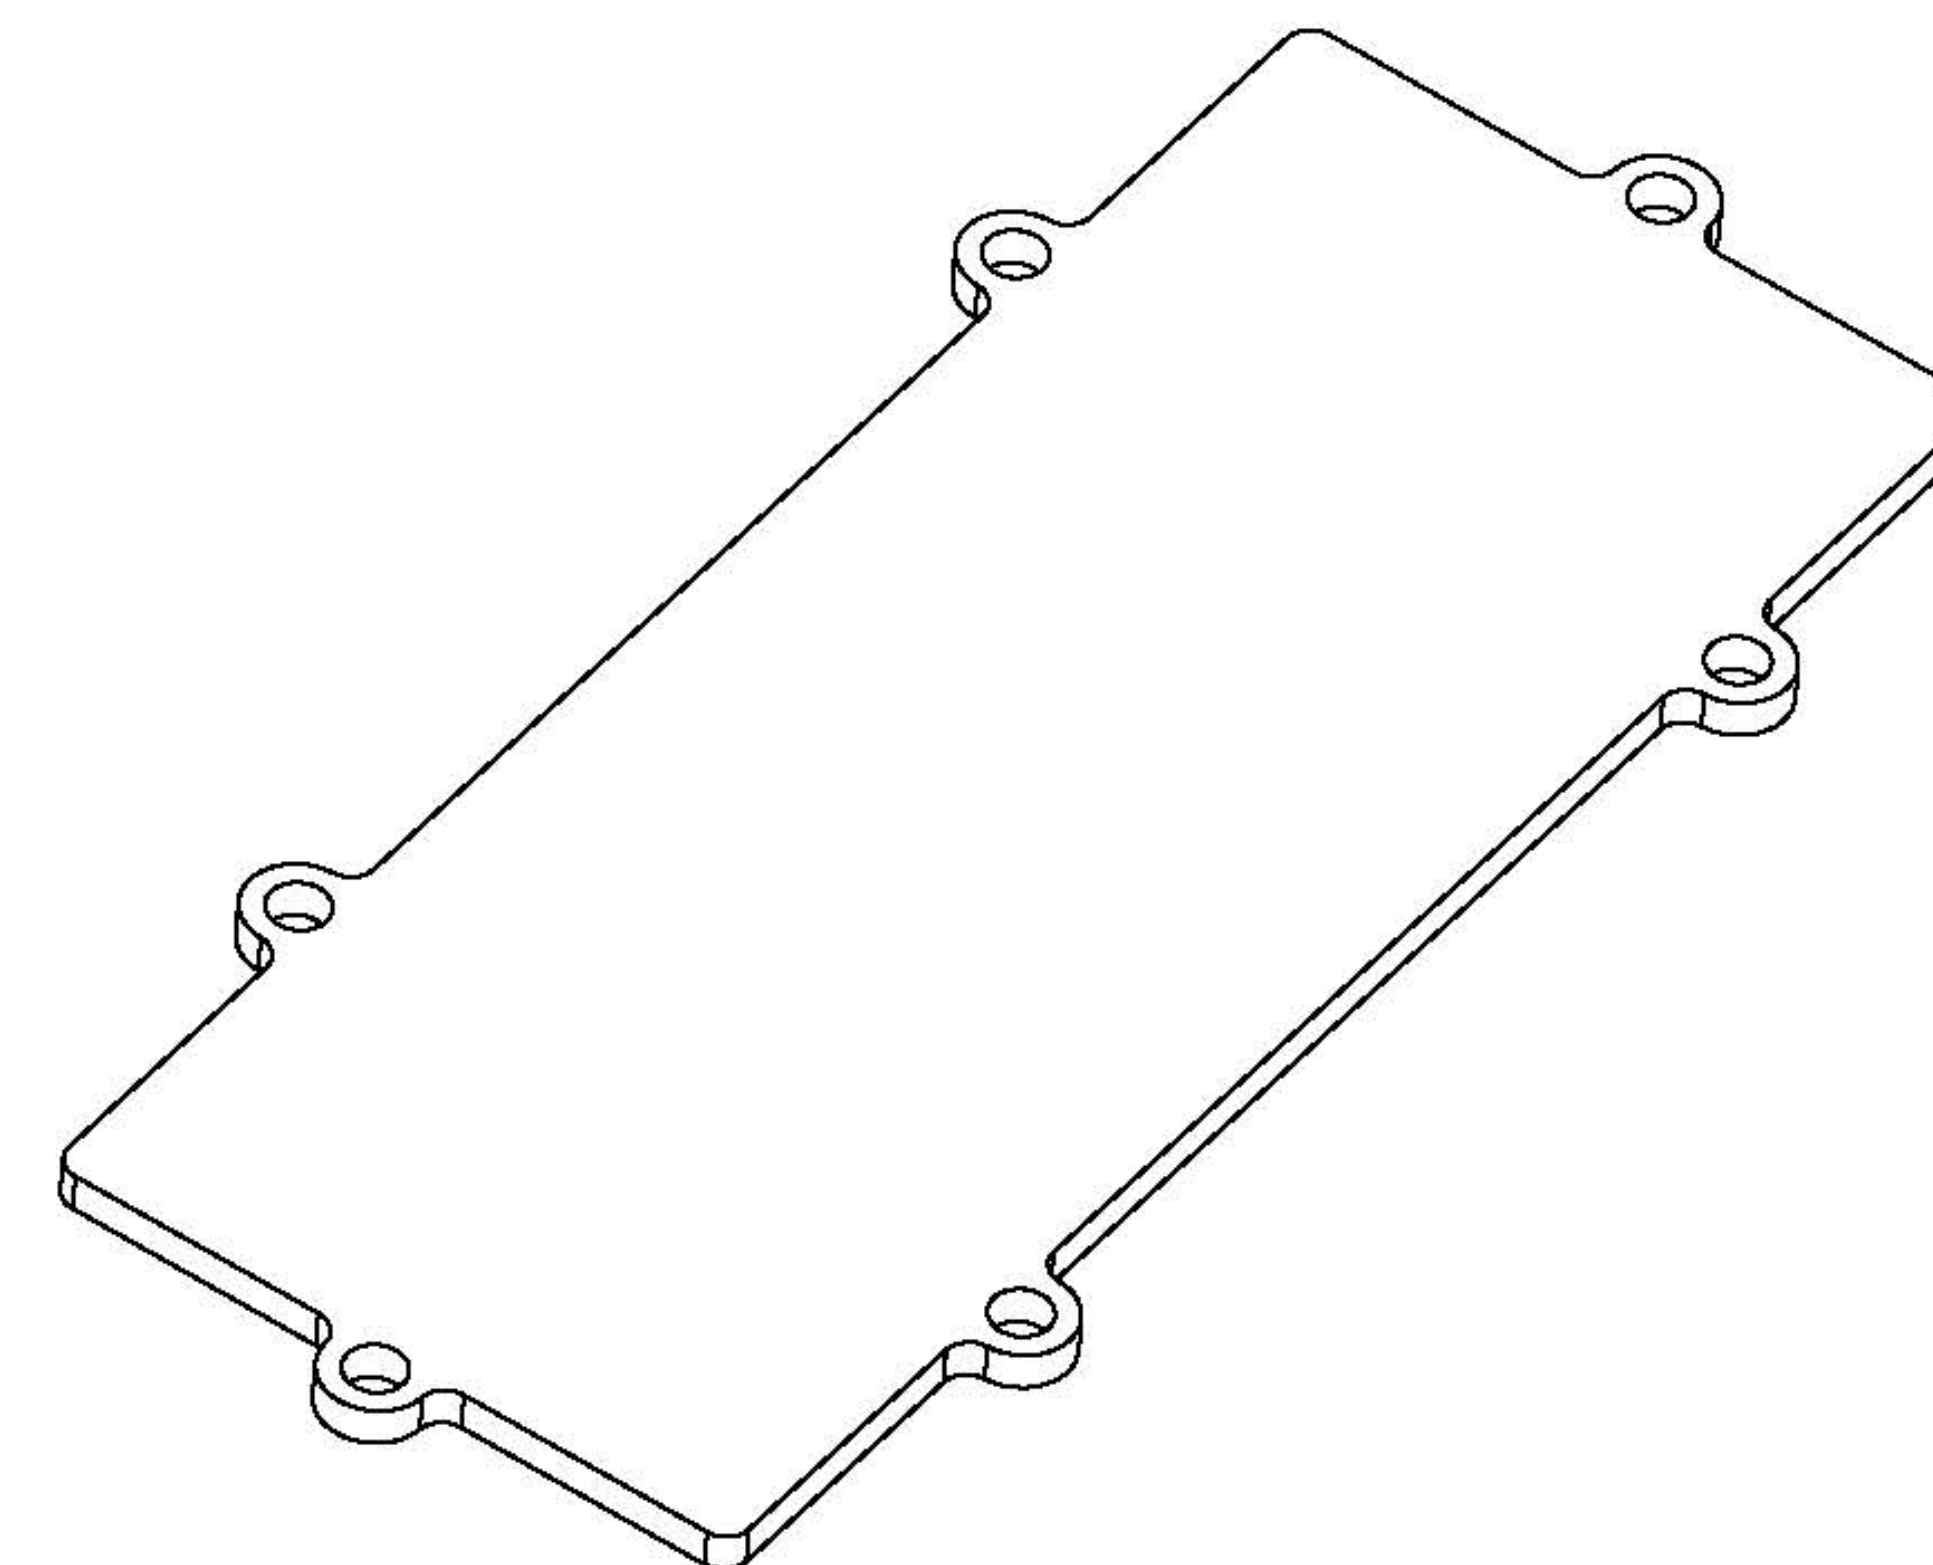
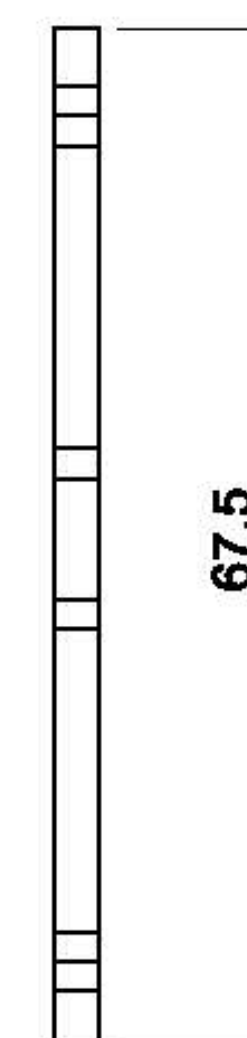
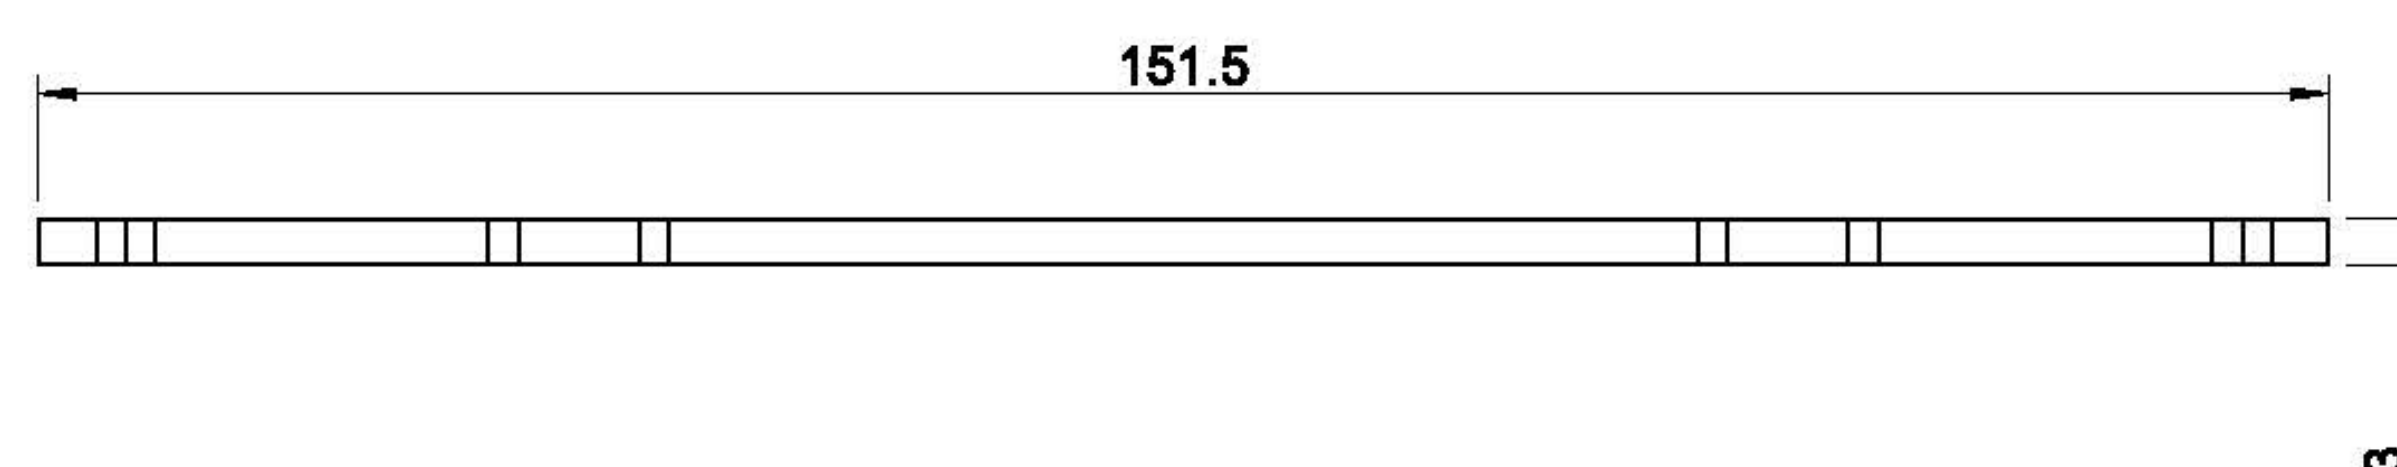
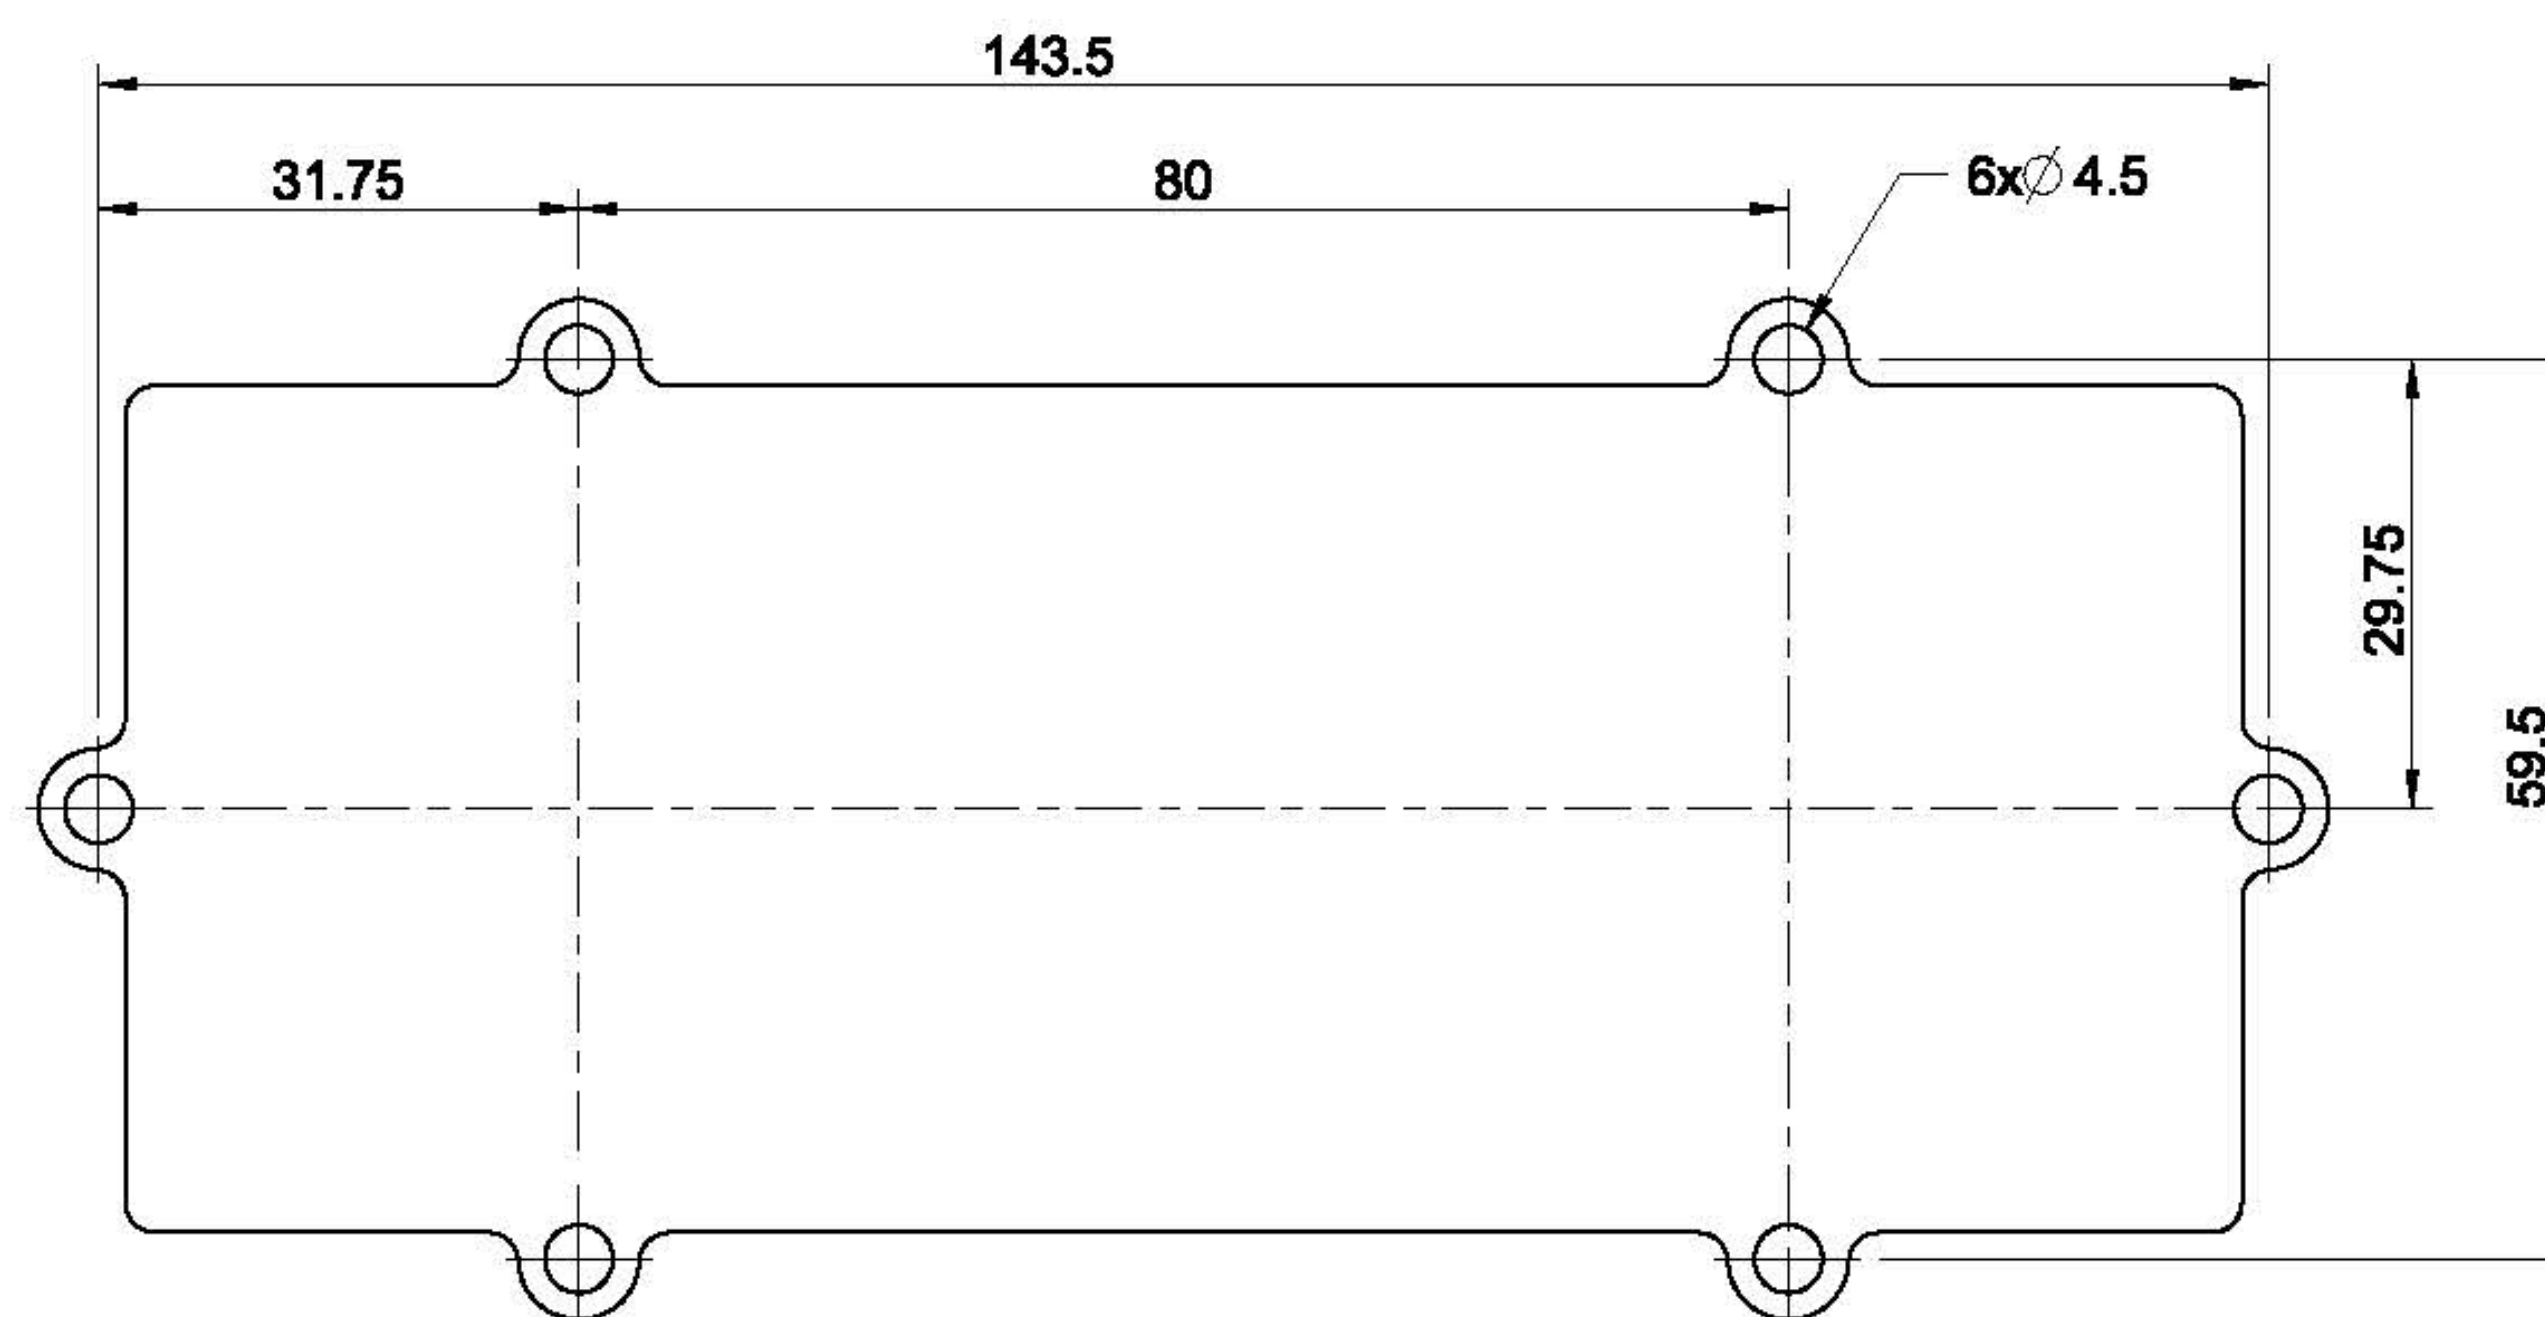

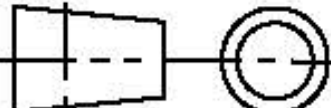


CRITICAL DIMENSION

Notes:

- 1) DEBUR ALL SHARP EDGES
2) THIS DRAWING IS SUPPLEMENT TO THE 3D DATABASE. PART FEATURES AND PRODUCTION TOOLING INFORMATION SHALL BE DERIVE FROM THE DATABASE
3) ALL DIMENSIONS SHOWN ARE FOR PART INSPECTION ONLY. IN THE EVENT OF A CONFLICT BETWEEN DATABASE AND THIS DRAWING, THE DATABASE SHALL GOVERN UNLESS SPECIFICALLY NOTED OTHERWISE. ALL UNSPECIFIED TOLERANCES ARE TO BE THE SECOND PLACE DECIMAL TOLERANCE, PROFILE, RELATIVE TO THE DATABASE



| | | | |
|---|------------------|--|-------------------------------|
| 01 | | DRAFT RELEASE | 30/11/2016 |
| REV | CRO NO | DESCRIPTION | RELEASED DATE |
| FINISH SPECIFICATION | | CLEAR ALODINE PER MIL-DTL-5541F, TYPE II, CLASS 1A | |
| MATERIAL SPECIFICATION | | ALUMINIUM 5052-H32 (SHEET METAL) | |
| UNLESS OTHERWISE SPECIFIED | |  OpenCellular | DOCUMENT CODE PART DRAWING |
| LINEAR TOL=ISO 2768-M 0.5 - 3 :+/-0.10 3-6 :+/-0.15 6-30 :+/-0.20 30-120 :+/-0.30 | | | |
| THIRD ANGLE | UNIT mm | PART NAME | SCALE 1:000 |
|  | SHEET SIZE A3 | PART NO | SHEET 1/1 |
| | | BATTERY COVER, OPENCCELLULAR,TIP | |
| | | 227-001260 | |