

1



2

3

4



CRITICAL DIMENSION

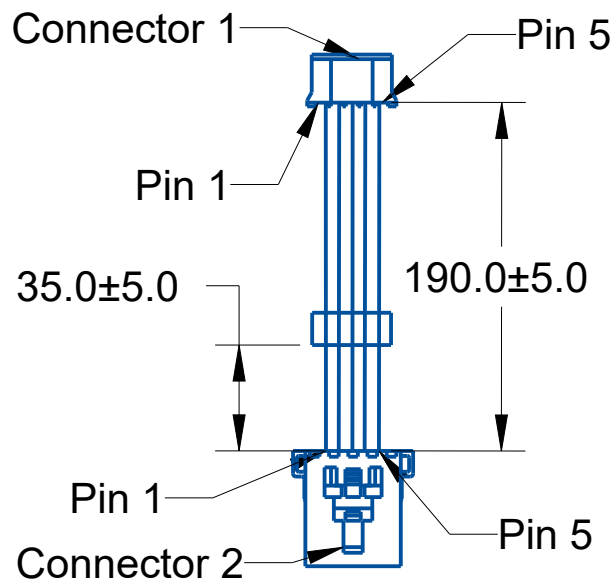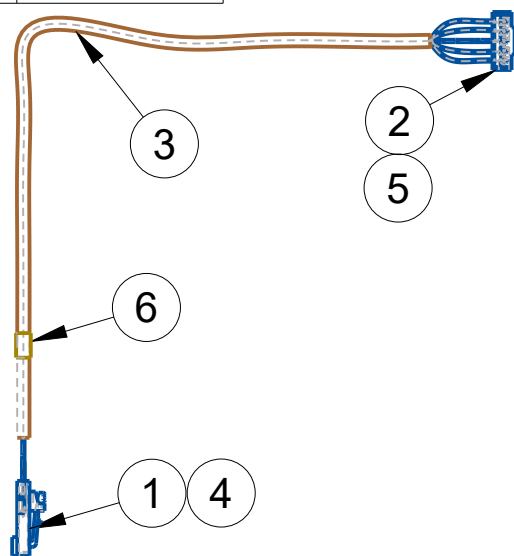

Reference details for wiring and marking

**Notes**

1. This assembly must have material compliance recognized by UL
2. Contact & Connector housing must be from the same manufacturer
3. Stripping & Crimping instructions, use qualified connector Manufacturer individual instructions

**Pin Configuration**

Connector -1 Pin #	Connector-2 Pin #
1	1
2	2
3	3
4	4
5	5

S.No	Open Cellular Part #	Manufacturer Part #	Description	Manufacturer	Quantity
1	213-000192	50-57-9705	2.54 mm Pitch 5 Pin Wire Connector	MOLEX	1
2	213-000193	PHR-5	2 mm Pitch 5 Pin Wire Connector	JST	1
3	207-000293	-	Semi-flexible cable 24/26/28 AWG	-	1
4	213-000191	16-02-0069	Crimp Contacts-50-57-9705	MOLEX	5
5	213-000146	SPH-002T-P0.5L	Crimp Contacts-PHR-5	JST	5
6	213-000139	-	Marking tube	BRADY	1

02

Updated cable length to 190mm

07/20/2017

01

DRAFT RELEASE

30/11/2016

REV

CRQ NO

DESCRIPTION

RELEASED DATE

FINISH SPECIFICATION

NA

MATERIAL SPECIFICATION

REFER TABLE

UNLESS OTHERWISE SPECIFIED  
 LINEAR TOL =NA  
 ANGULAR TOL=NA  
 SURFACE FINISH TOL=NA

DOCUMENT CODE  
PART DRAWINGUNIT  
mm

PART NAME

LED CABLE ASSEMBLY

SCALE  
0.700SHEET SIZE  
A4

PART NO

233-000038

SHEET 1/1

1

2

3

4