



Power uprates
and plant life extension



Engineering design
and analysis

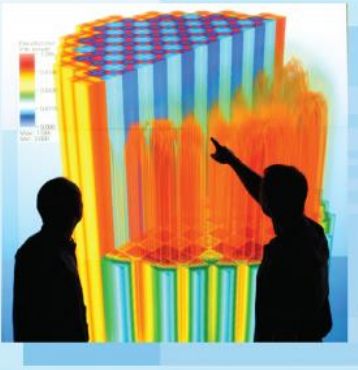

Science-enabling
high performance
computing

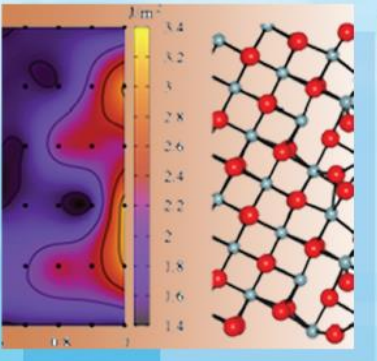

Fundamental science



Plant operational data

CASL-U-2014-0014-001

Consortium for Advanced Simulation of LWRs

VERA Common Input

User Manual

Scott Palmtag

Andrew Godfrey

March 31, 2014

U.S. DEPARTMENT OF ENERGY | Nuclear Energy



Oak Ridge National Laboratory

in partnership with

Electric Power Research Institute
Idaho National Laboratory
Los Alamos National Laboratory
Massachusetts Institute of Technology
North Carolina State University
Sandia National Laboratories
Tennessee Valley Authority
University of Michigan
Westinghouse Electric Company

and individual contributions from

Anatech Corporation
ASCOMP GmbH
CD-adapco, Inc
Core Physics, Inc.
City University of New York
Florida State University
Notre Dame University
Imperial College London
Pacific Northwest National Laboratory
Pennsylvania State University
Rensselaer Polytechnic Institute
Southern States Energy Board
Texas A&M University
University of Florida
University of Tennessee
University of Wisconsin

This report was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or any agency thereof.

REVISION LOG

Revision	Date	Affected Sections	Revision Description
Rev. 0	11/25/2013	All	Original Released Version for RSICC 2013 release
Rev. 1	03/31/2014	All	Major revision for Milestone L3:PHI.VCS.P8.01

VERA Common Input

Consortium for Advanced Simulation of LWRs (CASL)
www.casl.gov

Technical Report
CASL-U-2014-0014-001

Revision 1
March 2014



Contents

List of Acronyms 4

1 Introduction 6

1.1 Introduction to CASL . . . 6

1.2 VERA Core Simulator . . . 7

1.3 Manual Organization . . . 7

2 User Manual 9

2.1 Input Syntax . . . 10

2.2 Core Description . . . 12

2.2.1 Core Geometry . . . 12

2.2.2 Core Maps . . . 13

2.2.3 Core Baffle and Vessel . . . 17

2.2.4 Core Plates . . . 19

2.2.5 Small Cores Geometries . . . 19

2.3 Assembly Description . . . 20

2.3.1 Initial Data . . . 21

2.3.2 Cell Descriptions . . . 21
2.3.3 Lattice Descriptions . . . 22
2.3.4 Axial Descriptions . . . 24
2.3.5 Grid Spacer Descriptions . . . 24
2.3.6 Nozzle Descriptions . . . 25
2.4 Control Rod Assembly Description . . . 25
2.4.1 Control Rod Stroke . . . 27
2.4.2 Control Rod Position Example . . . 27
2.5 Insert Description . . . 28
2.6 Detector Description . . . 29
2.7 State Description . . . 31
2.8 Edits Description . . . 32
2.8.1 COBRA-TF Nodalization . . . 32
2.9 Coupling Description . . . 33

3 Materials Description **35**
3.1 Structural Materials . . . 35
3.1.1 Search Order . . . 36
3.2 Composition File . . . 37
3.3 Fuel Materials . . . 37

4 Input Card Descriptions **40**
4.1 Block CASEID . . . 41
4.2 Block STATE . . . 41

4.3 Block CORE 42
4.4 Block ASSEMBLY 45
4.5 Block CONTROL 47
4.6 Block INSERT 47
4.7 Block DETECTOR 48
4.8 Block EDITS 49
4.9 Block COBRATF 49
4.10 Block INSILICO 52
4.11 Block MPACT 52
4.12 Block COUPLING 52

5 Examples **54**

5.1 Example 1 – Full-Core 54
5.2 Example 2 – Single-Assembly 63
5.3 Example 3 – 2D Lattice Geometry 66

List of Acronyms

CASL Consortium for Advanced Simulation of Light Water Reactors

BWR Boiling Water Reactor

CFD Computational Fluid Dynamics

CILC Crud-Induced Localized Corrosion

CIPS Crud-Induced Power Shift (also called AOA)

CTF COBRA-TF (Subchannel Code)

DNB Departure from Nucleate Boiling

EFPD Effective Full Power Days

EOC End of Cycle

GWd/MT Gigawatt-Days per Metric Ton Heavy Metal

HFP Hot Full Power

HZP Hot Zero Power

LWR Light Water Reactor

MOC Middle of Cycle

MWd/MT Megawatt-Days per Metric Ton Heavy Metal

PCI Pellet-Cladding Interaction

PCM Percent Mille (10^{-5})

PPM Parts per Million (usually boron)

PSU Pennsylvania State University

PWR Pressurized Water Reactor

QA Quality Assurance

VERA Virtual Environment for Reactor Applications

Chapter 1

Introduction

1.1 Introduction to CASL

The Consortium for Advanced Simulation of Light Water Reactors (CASL) is the first DOE Energy Innovation Hub established in July 2010, for the purpose of providing advanced modeling and simulation (ModSim) solutions for commercial nuclear reactors.

CASL's vision is to predict, with confidence, the performance of nuclear reactors through comprehensive, science-based modeling and simulation technology that is deployed and applied broadly throughout the nuclear energy industry to enhance safety, reliability, and economics.

CASL's mission is to provide coupled, high-fidelity, usable modeling and simulation capabilities needed to address light water reactor operational and safety performance-defining phenomena.

CASL's foundational technology products include CASL solutions and CASL ModSim Technologies. CASL's ModSim technology, the Virtual Environment for Reactor Applications (VERA), provides higher-fidelity results than the current industry approach by incorporating coupled physics and science-based models, state-of-the-art numerical methods, modern computational science, integrated uncertainty quantification (UQ) and validation against data from operating pressurized water reactors (PWRs), single-effect experiments, and integral tests.

CASL will address, through new insights afforded by its ModSim technology, key nuclear energy industry challenges to furthering power uprates, higher fuel burnup, and lifetime extension while providing higher confidence in enhanced nuclear safety and this cleaner energy source.

The CASL Team is a consortium that consists of ten core partners and numerous contributing members. The CASL organization is led by Oak Ridge National Lab, and CASL's research

and development is executed in six technical teams called Focus Areas (FA) and one integrating technical area. This ground-breaking partnership provides unparalleled collective institutional knowledge, nuclear science and engineering talent, computational science leadership, and a record of LWR design and regulatory accomplishments!

More information on CASL can be found at the website www.casl.gov.

1.2 VERA Core Simulator

One component of VERA is the VERA Core Simulator (VERA-CS). The core simulator is the specific collection of multi-physics computer codes used to model and deplete a LWR core over multiple cycles. Examples of the separate physics codes include cross sections, neutron transport, depletion, thermal-hydraulics, and fuel performance.

The purpose of the core simulator is to provide data and boundary conditions to model CASL Challenge Problems such as CIPS, CILC, DNB, and PCI analysis.

One important feature of the core simulator is that a single common input file is used to drive all of the different physics codes[1]. One benefit of using a single common input is that users only need to understand and be proficient with one input, instead of having to understand multiple inputs for multiple physics codes. Another benefit of using a single common input is that all codes work from a single geometry description, and this reduces errors due to inconsistent geometries in different codes.

This document lives in the VERA Git repository file "VERAInExt/verain/docs/verain_UM.pdf". Please refer to this location for the latest version of the input manual.

1.3 Manual Organization

This manual is organized into two parts.

The first part, which includes Chapters 2 and 3, create a "User's Manual", which is meant to describe how a user would set up a typical input. This part of the manual gives the most common input cards that a user would need and describes how to use them. This part of the manual does not include a complete list of cards or show every available option.

The second part of the manual, Chapter 4, creates a "Reference Manual"' and includes a completing listing of every available input card.

[1] The only exception to this is for CFD codes, which require a CAD drawing to perform any meaningful analysis.

The last chapter, Chapter 5, gives several example inputs. Additional inputs can also be found in the code installation directory.

Chapter 2

User Manual

The VERA common input is an ASCII file. The VERA input is designed to be modular. The input is split into separate modules (or blocks) to describe the different geometric objects in the core and to define specific modeling options for each of the physics codes.

Geometric objects are defined as the physical "parts" of the reactor core, which includes fuel assemblies, control rod assemblies, removable burnable poison assemblies, and detectors. By defining each geometric object as a separate block, the objects can be described independently of each other and rely on very little global information. The independent descriptions make quality assurance (QA) easier and allows objects to be defined in one cycle and be re-used in subsequent cycles without worrying about input conflicts. Another advantage of the module approach is that it makes it easier to shuffle fuel assemblies, and insert and withdraw "inserts" (such as control rods, detectors, and removable burnable poison assemblies) into the fuel assemblies as the core configuration changes.

Additional modules/blocks are used to define modeling options and parameters for each of the physics codes. Separating the geometry description from the modeling options allows all of the physics codes to share the same geometry description and also allows the same input to be used with multiple physics codes.

The VERA input blocks are:

CASEID This block contains an input title card.

CORE This block describes the core layout including core map, assembly locations, control rod locations, and assembly insert locations. The CORE block contains data that will not change during a cycle depletion.

STATE These blocks describes reactor core operating parameters (statepoint values) at a par-

ticular point in time. Parameters include inlet temperature, pressure, power, and control rod positions. STATE values can (and usually do) change at each statepoint.

ASSEMBLY These blocks contains the geometry and physical description of the nuclear fuel assemblies. The assembly descriptions do not include control rods, detectors, or inserts.

INSERT These blocks contain the geometry and physical description of the assembly inserts. An insert is a generic term used to describe a removable burnable poison assembly or a thimble plug assembly.

CONTROL This block contains the geometry and physical description of a control rod assembly. A control rod assembly is similar to an assembly insert, except that it can move during operations.

DETECTOR This block contains the geometry and physical description of a detector string.

EDITS This block contains information on what edits the code should produce.

COUPLING This block contains parameters for coupling different physics codes together.

In addition to the blocks listed above, there are additional code-specific blocks that contain options specific to each physics code. Examples of code-specific blocks are **COBRATF**, **INSILICO**, **MAMBA2D**, and **MPACT**. Additional code-specific input blocks can be added as new physics codes are added to the core simulator.

The following sections in this chapter describe the most common concepts and features of each input block. This section does not provide a comprehensive list of each input card or option on each card. Refer to Chapter 4 for a detailed listing of all input and options.

2.1 Input Syntax

VERA input files are text files that contain standard printable ASCII characters. The data is organized in blocks with names and purpose as described in the introduction. The start of a block is denoted by the blocks name enclosed in square brackets, e.g. [STATE]. The file block structure is flat, so that there is no hierarchy in the block segments. A start of a new block also implies the end of the previous block. Currently, only the [STATE] block can have multiple instances to describe reactor operating conditions. Other blocks are unique, so that a new block with the same name of an existing block will overwrite the existing block data. There is no required order of the blocks in input file, except for the [STATE] blocks, in which each statepoint must be entered in the correct chronological order. The future development will bring multiple instances of other blocks in order to provide more flexibility of problem definition.

The blocks contain input cards that are generally organized as keyword-value pairs or keyword-tag-value triplets where tag denotes the keyword name tag that can be referenced in the other related commands. Keywords should not have blank spaces, as the spaces usually imply delimiters

in the card data. A value can be a single or list entry. Input cards value entries can contain different data types, depending on the card format. The data types are real numbers, integers, characters, and character strings. String entries that include spaces should be enclosed in single or double quote pairs.

The block, keyword and tag names are case sensitive. Therefore, it is recommended that users should not depend on the capitalization for differentiation between entries in the file.

Exclamation mark, !, is a special keyword that makes everything from it to the end of line ignored for processing and is used for adding comments in an input file.

Keyword *include* is used for insertion of a content of another file into the input file. The *include cards* should be placed into a new line and cannot be used inside another input card or block. The *include* command can be split across multiple lines. This option is enabled only for the long commands such as maps.

The multiline commands will be identified in the documentation for each block. Short commands are expected to complete within a single line. This restriction has been added in order to make the input more easily readable and may be removed in the future.

An example input fragment showing blocks, comments, and cards, is shown below.

```
! comments start with an exclamation point

[STATE]              ! block names are enclosed in square brackets
  power   85.0       ! cards with parameters(s)
  flow    80.0       ! cards and parameters are separated by one or more spaces

  rodbank A 228      ! cards can span more than one line
          B 228
          C 228
          D 228

[CORE]               ! start of second block
  title  "Title must be enclosed in quotes if spaces are used"
```

Several legacy Fortran codes have special characters that allow you to skip or repeat input values. There are no such special characters used in the VERA input.

In this manual, the convention used is that all input examples are shown in `typewriter font`. When input cards are used in the text (not in the examples), they are usually listed in *italic font*. All block names are usually listed with square brackets around them.

2.2 Core Description

The [CORE] block describes the nuclear reactor core configuration. This block describes the core layout, including the placement of nuclear fuel assemblies, control rods, detectors, inserts, and other core parameters that do not change during a cycle depletion.

The geometric objects inside the core are defined in separate input blocks, the [CORE] block simply describes how all of these objects are placed together.

2.2.1 Core Geometry

The reactor core geometry must be defined first. The overall *size* of the core is given by the number of assemblies across one major axis of the core. The assembly pitch (*apitch*) defines the width of each assembly, including the assembly gap. The distance from the top of the lower core plate to the bottom of the upper core plate is given by the parameter *height*. The assembly layout is given by the *core_shape* map. Note that the core shape map is the only "square" core map in the input, and it must be of *size* assemblies by *size*. Once the core shape is defined, subsequent core maps only include entries for actual fuel assembly locations.

```
size 15               ! number of assemblies across one axis
apitch 21.5           ! assembly pitch (cm)
height 406.337        ! distance from lower core plate to upper core plate (cm)

core_shape
  0 0 0 0 1 1 1 1 1 1 1 0 0 0 0
  0 0 1 1 1 1 1 1 1 1 1 1 1 0 0
  0 1 1 1 1 1 1 1 1 1 1 1 1 1 0
  0 1 1 1 1 1 1 1 1 1 1 1 1 1 0
  1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
  1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
  1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
  1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
  1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
  1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
  1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
  0 1 1 1 1 1 1 1 1 1 1 1 1 1 0
  0 1 1 1 1 1 1 1 1 1 1 1 1 1 0
  0 0 1 1 1 1 1 1 1 1 1 1 1 0 0
  0 0 0 0 1 1 1 1 1 1 1 0 0 0 0
```

The *core_shape* map is unique because it is square in shape and composed of the integers 1 and 0. The purpose of this map is to define the shape for subsequent core maps.

Most physics codes support both calculations run in either full-core or quarter-core (qtr-core) symmetry. If a calculation is run in qtr-core symmetry, the code must know if the symmetry is mirror symmetric or rotational symmetric. The type of qtr-core symmetry is defined with the *bc_sym* input card. The symmetry option is not used if the calculation is run in full-core.

```
bc_sym mir    ! define qtr-core symmetry as mirror
```

(Note: rotational symmetry is supported by the input parser, but may not be supported in the physics codes at this time)

2.2.2 Core Maps

Core maps are used to define the location of geometry objects in the core. There are different core maps to define types and locations of assemblies, inserts, detectors, and control rods. The entries in the maps are composed of arbitrary length character strings. Even though the character strings can be any size, it is recommended to use compact names so the maps remain legible.

All of the maps require one entry for each assembly location defined in the *core_shape* map. However, the input parser can be used to take advantage of core symmetry. If the core is symmetric, the user only needs to input the maps in quarter or octant symmetry, and the input parser will automatically unfold the map to full-symmetry. The symmetry used in the core maps is independent of the symmetry used to run the actual calculations. For example, the user can enter all of the core maps in octant symmetry and still run the calculations in quarter or full symmetry. The quadrant and octant that the parser is expecting is shown in Figure 2.1.

If there is an empty location in the map (e.g. if there is no detector or no control rod in an assembly), enter a dash "-" for that location. The dash is significant and signifies an empty location in the core map.

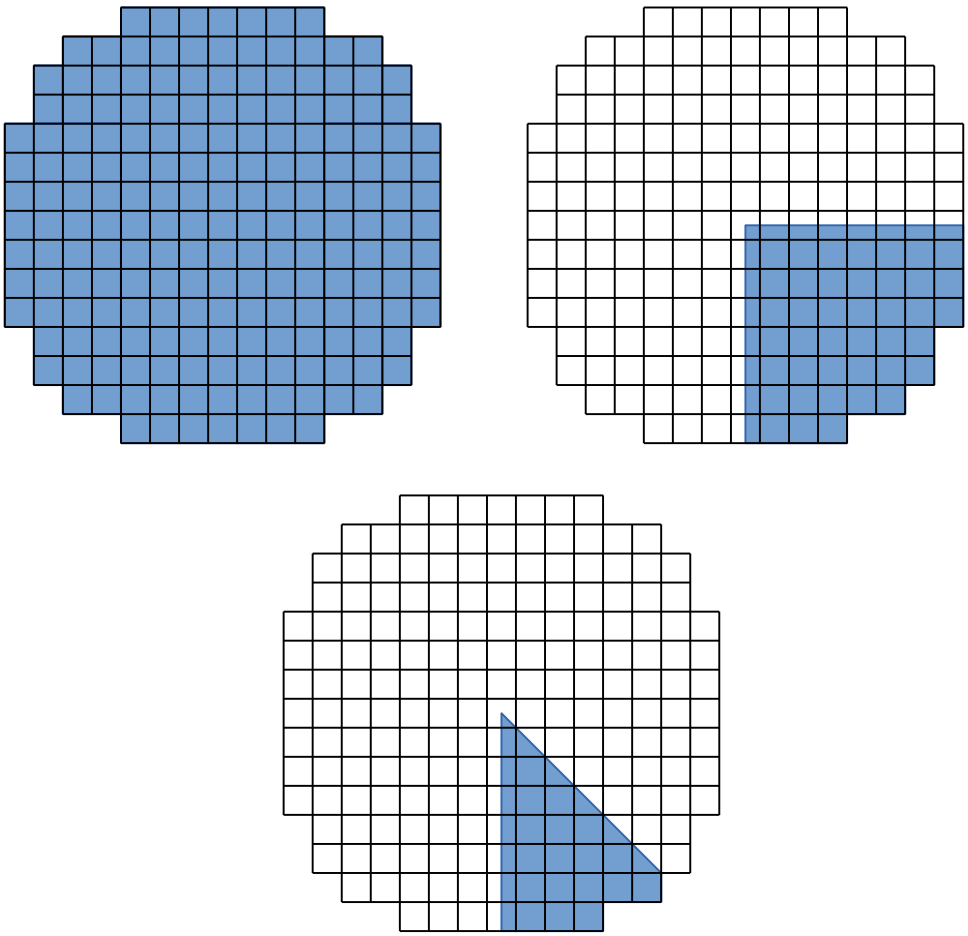


Figure 2.1: Full, quarter, and octant symmetry regions for a core map.

The *assm_map* shows where the assembly types are located within the core. In the example below, there are three assembly types which will be defined in [ASSEMBLY] block(s).

```
assm_map
                A3 A3 A3 A3 A3 A3 A3
           A3 A3 A3 A1 A3 A1 A3 A1 A3 A3 A3
        A3 A3 A2 A1 A2 A1 A2 A1 A2 A1 A2 A3 A3
        A3 A2 A2 A2 A1 A2 A1 A2 A1 A2 A2 A2 A3
     A3 A3 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A3 A3
     A3 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A3
     A3 A3 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A3 A3
     A3 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A3
     A3 A3 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A3 A3
     A3 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A3
     A3 A3 A1 A2 A1 A2 A1 A2 A1 A2 A1 A2 A1 A3 A3
        A3 A2 A2 A2 A1 A2 A1 A2 A1 A2 A2 A2 A3
        A3 A3 A2 A1 A2 A1 A2 A1 A2 A1 A2 A3 A3
           A3 A3 A3 A1 A3 A1 A3 A1 A3 A3 A3
                 A3 A3 A3 A3 A3 A3 A3
```

The following map is equivalent to the previous map, but demonstrates the use of input with octant symmetry. Only values in the octant shown in Figure 2.1 are entered in the map and the parser automatically unfolds the map to full-symmetry.

```
assm_map
   A1
   A2 A1
   A1 A2 A1
   A2 A1 A2 A1
   A1 A2 A1 A2 A2
   A2 A1 A2 A1 A2 A3
   A1 A3 A1 A3 A3 A3
   A3 A3 A3 A3         ! assembly map with octant symmetry
```

The *insert_map* is used to show where assembly inserts are located within the core. In the following qtr-symmetry example, the inserts are burnable poison assemblies with different numbers of pyrex rods. The *insert_map* can also be used to place geometry objects such as thimble plugs. The geometry description of the inserts will be given in the [INSERT] block.

```
insert_map
    -    BP20   -    BP20   -    BP20   -    BP12
   BP20   -    BP24   -    BP20   -    BP24   -
    -    BP24   -    BP20   -    BP16   -    BP8
   BP20   -    BP20   -    BP20   -    BP16   -
    -    BP20   -    BP20   -    BP24   -
   BP20   -    BP16   -    BP24  BP12   -
    -    BP24   -    BP16   -     -
   BP12   -    BP8    -
```

The *insert_map* is optional if no inserts are present in the core. A dash "-" is used to specify assembly locations without an insert.

The *det_map* is used to show where detectors are located in the core. The geometry description of the corresponding detector strings is given in the [DETECTOR] block. In this example, there is only one detector type denoted with a "1". Since the "1" occurs in a core map, it is treated as a character string. This example uses a full-symmetry map.

```
det_map
                - - 1 - - 1 -
          1 - - 1 - 1 - - - - -
        - - - - - - 1 - 1 - 1 - 1
        1 1 - - - - 1 - - - - - -
    - - - - 1 - - - 1 - 1 - 1 - -
    1 - 1 - - 1 - 1 - - - - - 1 -
    - - - 1 - - 1 - - 1 - - 1 - -
    1 - 1 - 1 - 1 - - 1 - 1 1 1 -
    - 1 - - - - - - 1 - 1 - - - 1
    - - - - 1 - 1 - - - - 1 - - -
    1 - - - 1 - - 1 - - 1 - - - 1
      - - - - 1 - - 1 - - 1 - -
      - 1 - 1 - - 1 - - - - - 1
        1 - - - 1 - - 1 - 1 -
            1 - - 1 - - -
```

The *det_map* is optional if no detectors are present in the core. A dash "-" is used to specify assembly locations without a detector.

The control rod assemblies are described with two maps. The *crd_map* defines the control rod types and locations in the core. The *crd_bank* map assigns control rod locations to control rod banks. The control rod maps are optional if no control rods are present in the core.

```
crd_map
                  -  -  -  -  -  -  -
            -  1  -  1  -  1  -  1  -  1  -
         -  -  -  1  -  1  -  1  -  1  -  -  -
         1  -  1  -  -  -  1  -  -  -  1  -  1
      -  -  1  -  1  -  -  -  -  -  1  -  1  -  -
      -  1  -  -  -  1  -  1  -  1  -  -  -  1  -
      -  -  1  -  -  -  -  -  -  -  -  -  1  -  -
      -  1  -  1  -  1  -  1  -  1  -  1  -  1  -
      -  -  1  -  -  -  -  -  -  -  -  -  1  -  -
      -  1  -  -  -  1  -  1  -  1  -  -  -  1  -
      -  -  1  -  1  -  -  -  -  -  1  -  1  -  -
         1  -  1  -  -  -  1  -  -  -  1  -  1
         -  -  -  1  -  1  -  1  -  1  -  -  -
            -  1  -  1  -  1  -  1  -  1  -
                  -  -  -  -  -  -  -
crd_bank
                  -  -  -  -  -  -  -
            - SA  -  B  -  C  -  B  - SA  -
         -  -  - SD  - SB  - SB  - SC  -  -  -
      SA  -  D  -  -  -  D  -  -  -  D  - SA
      -  - SC  -  A  -  -  -  -  -  A  - SD  -  -
      -  B  -  -  -  C  -  A  -  C  -  -  -  B  -
      -  - SB  -  -  -  -  -  -  -  -  - SB  -  -
      -  C  -  D  -  A  -  D  -  A  -  D  -  C  -
      -  - SB  -  -  -  -  -  -  -  -  - SB  -  -
      -  B  -  -  -  C  -  A  -  C  -  -  -  B  -
      -  - SD  -  A  -  -  -  -  -  A  - SC  -  -
      SA  -  D  -  -  -  D  -  -  -  D  - SA
         -  -  - SC  - SB  - SB  - SD  -  -  -
            - SA  -  B  -  C  -  B  - SA  -
                  -  -  -  -  -  -  -
```

2.2.3 Core Baffle and Vessel

The core baffle (sometimes called the shroud) is a steel reflector that closely surrounds the fuel assemblies in the core. The barrel is a round steel structure that surrounds the baffle, and the vessel is the round outer pressure vessel. These structures are shown in Figure 2.2.

The *baffle* is defined with a single material, the size of the gap between the outer assembly and baffle, and the baffle thickness.

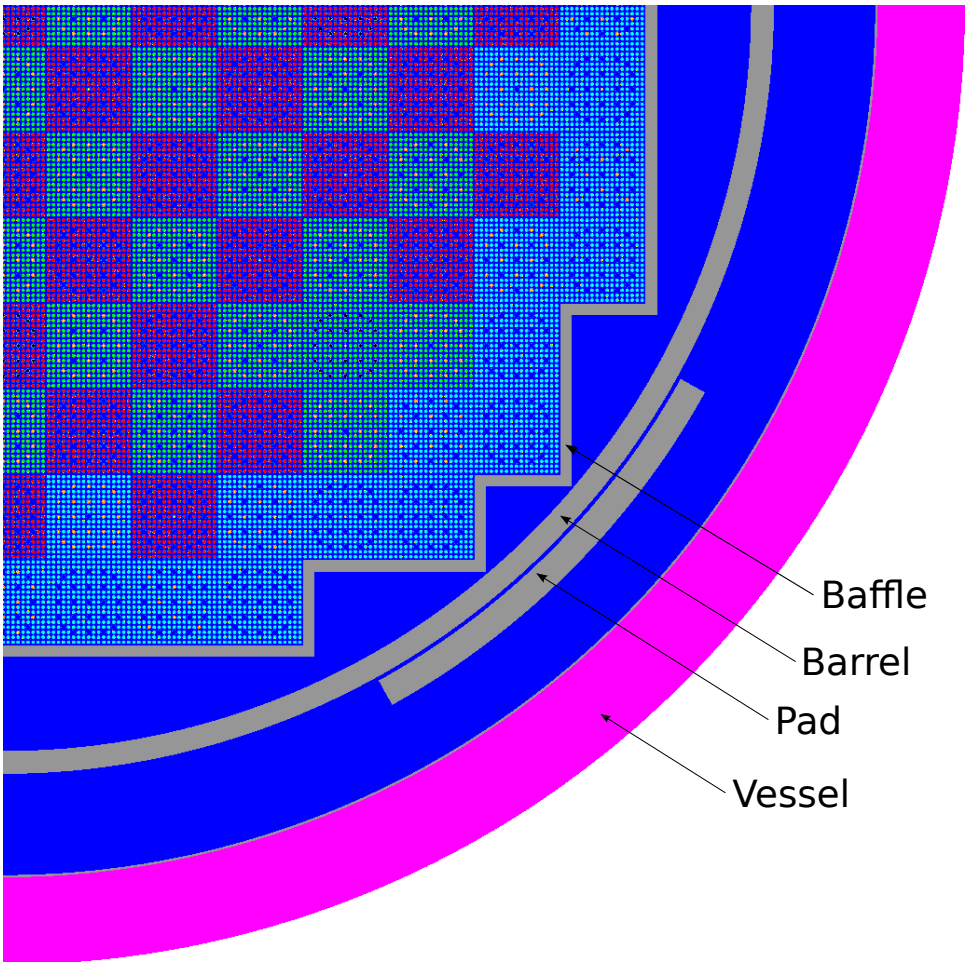


Figure 2.2: Core baffle and vessel (image courtesy of Andrew Godfrey).

```
baffle   SS304 0.19 1.26   ! material, gap (cm), and thickness (cm)
```

The barrel and vessel are defined with a *vessel* card. This card allows the user to enter any arbitrary number of rings surrounding a core by specifying the ring radii and the materials between the rings.

```
vessel   mod 166.7 SS304 169.2 mod 175.0 SS304 176.0   ! materials and radii (cm)
```

There is currently no input defined to specify the neutron pad.

2.2.4 Core Plates

The core plates are large steel plates at the top and bottom of the core that have various flow holes passing through them. All of the axial core heights are defined relative to the top of the bottom core plate and the total core *height* is defined as the distance between the top of the bottom core plate and the bottom of the top core plate.

The core plates are modeled in the neutronics codes as smeared materials. The upper and lower core plates are defined with a material composition, a thickness, and a volume fraction of the structural material. The remainder of the volume fraction is filled with coolant.

```
lower_plate SS304  5.0  0.5   ! material, thickness (cm), volume fraction
upper_plate SS304  7.6  0.5   ! material, thickness (cm), volume fraction
```

2.2.5 Small Cores Geometries

Even though the VERA input is designed for "real" core geometries, it can accommodate smaller problems as well. For example, if the user only wants to run a single-assembly calculation, they would define the core size as one assembly by one assembly, and all of the core maps would contain a single assembly.

```
size 1                ! core composed of a single-assembly
core_shape
   1
```

If the user wants to model a single fuel rod, they would define a core with one assembly and an assembly with one rod in it.

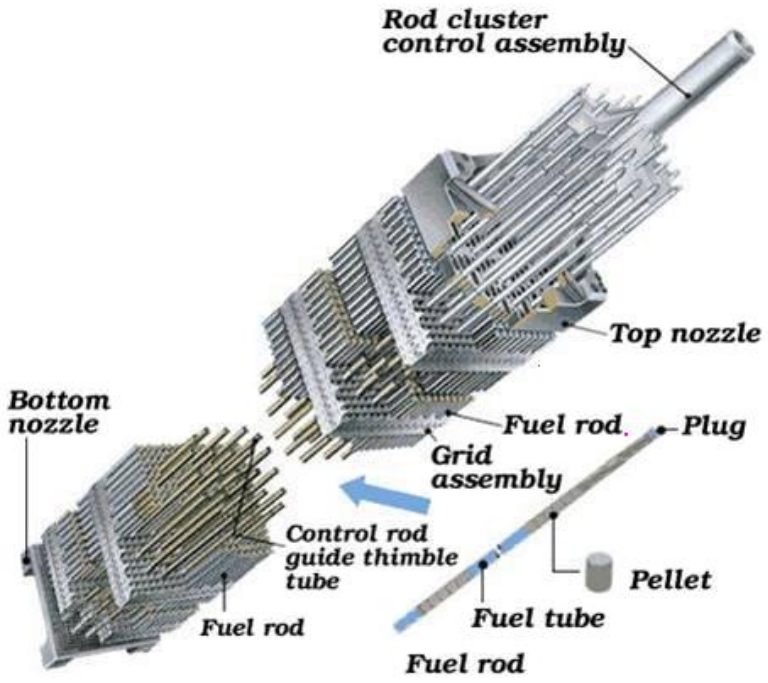


Figure 2.3: PWR Fuel Assembly (source: Public internet).

2.3 Assembly Description

The [ASSEMBLY] block contains the geometric description of a unique fuel assembly design (type). Multiple [ASSEMBLY] blocks are allowed to describe different assembly designs in the core.

If there are multiple assembly designs that are geometrically identical (i.e. everything is the same except the enrichments), then they can all be defined in a single [ASSEMBLY] block. Each assembly type will have a unique *axial* card with possibly unique axial levels and lattice types. Assemblies within a single reload typically have a design similar enough that they can share a single [ASSEMBLY] block.

If assembly designs are not geometrically identical (e.g. different vendors, different generations, etc.) they need to be defined in separate [ASSEMBLY] blocks. One advantage to having separate blocks for each assembly design is that each design can be modeled (and archived) independently without having to rely on global definitions.

A typical PWR assembly is shown in Figure 2.3. Refer to this figure in the following discussions.

A complete listing of all the input cards in the [ASSEMBLY] block is located in Section 4.4.

2.3.1 Initial Data

Each assembly block must contain a geometry description with the number of pins across the assembly and the pin pitch. An assembly block can also include an optional title card.

```
title "Westinghouse 17x17"      ! assembly title
npin 17                         ! number of pins across one side
ppitch 1.260                    ! pin pitch (cm)
```

The number of pins *npin* must be the same for every assembly in a core.

The inter-assembly gap on each side of the assembly is calculated as $[apitch - npin * ppitch]/2$

The fuel and structural materials are defined with the following cards. See Chapter 3 for a complete description of the material inputs.

```
fuel U31 10.257 95.0 / 3.1   ! mat, density (g/cc), Theoretical density (%)
                             !    / U-235 enrichment (%)
mat inc  8.19                ! mat, density (g/cc)
mat ss   8.0
mat zirc 6.56
```

2.3.2 Cell Descriptions

Cell cards are used to describe "pincells". A pincell is defined as a configuration of concentric cylinders (or rings) centered in a square region of coolant. Cell configurations can be used to model fuel rods or guide tubes, as shown in Figure 2.4.

The first parameter on the *cell* card is the cell ID. This is followed by a list of radii for each ring in the cell, followed by a slash. After the slash is a list of materials that compose each ring. The cell ID's are used in the rod maps described in the next section.

```
cell 1     0.4096 0.418 0.475 / U31 he zirc
cell GT           0.561 0.602 / mod    zirc       ! guide tube
cell IT           0.561 0.602 / mod    zirc       ! instrument tube
cell 7            0.418 0.475 / mod    mod        ! empty location
cell 8            0.418 0.475 /     he zirc       ! plenum
cell 9                  0.475 /        zirc       ! pincap
```

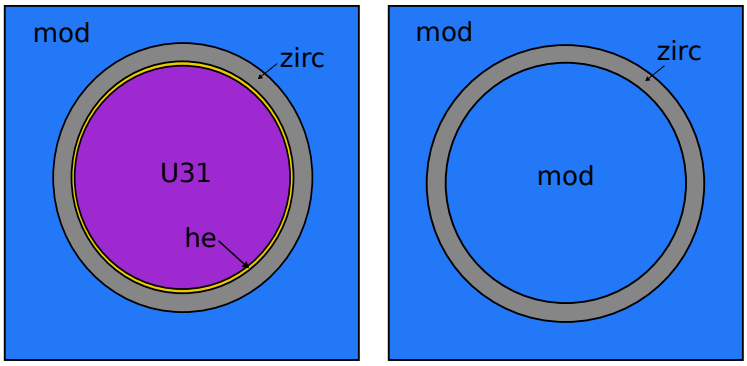


Figure 2.4: Pincell diagrams of a fuel rod and a guide tube.

In this example, in cell "1", the material "U31" extends from radius 0 to 0.4096. The material "he" extends from a radius 0.4096 to 0.418. The materials "U31" and "he" are defined on *fuel* and *mat* cards, respectively. (Refer to Chapter 3 for a complete description on defining materials.)

The outside of each cell is automatically filled with the special material "mod", which refers to the moderator (or coolant). The composition of "mod" is calculated by the codes using the local T/H conditions and the soluble boron concentration, and cannot be specified by a user on a *mat* card.

In the example above, the guide tube (GT) and instrument tube (IT) descriptions use the special moderator material "mod" to define the moderator material on both the inside and outside of the tubes.

Note that large water rods that span more than one lattice cell are not currently supported in the input (e.g. large CE water rods that span four lattice cells). In the future, an option will be added to the *cell* card to specify if a water rod spans more than one cell.

2.3.3 Lattice Descriptions

Once the cells are defined, they are placed into 2D "lattices" as shown below. Like the core maps, the lattice maps can be entered with either full-symmetry, qtr-symmetry, or octant-symmetry. The maps below are octant symmetric maps for 17x17 assembly designs.

```
rodmap FUEL1
    IT
     1 1
     1 1 1
    GT 1 1 GT
     1 1 1  1 1
     1 1 1  1 1 GT
    GT 1 1 GT 1  1 1
     1 1 1  1 1  1 1 1
     1 1 1  1 1  1 1 1 1

rodmap LGAP1
    IT
     7 7
     7 7 7
    GT 7 7 GT
     7 7 7  7 7
     7 7 7  7 7 GT
    GT 7 7 GT 7  7 7
     7 7 7  7 7  7 7 7
     7 7 7  7 7  7 7 7 7

rodmap PLEN1
    IT
     8 8
     8 8 8
    GT 8 8 GT
     8 8 8  8 8
     8 8 8  8 8 GT
    GT 8 8 GT 8  8 8
     8 8 8  8 8  8 8 8
     8 8 8  8 8  8 8 8 8

rodmap PCAP1
    IT
     9 9
     9 9 9
    GT 9 9 GT
     9 9 9  9 9
     9 9 9  9 9 GT
    GT 9 9 GT 9  9 9
     9 9 9  9 9  9 9 9
     9 9 9  9 9  9 9 9 9
```

Rod maps define each unique axial level in the assembly. The first parameter is the lattice name (e.g. FUEL1, PCAP1, etc.), followed by a map of the *cell* ID's.

Each entry in a rod map must be a valid cell ID.

2.3.4 Axial Descriptions

After rod maps are defined for each axial level, the lattices are "stacked" into an assembly using an *axial* card as shown below.

```
axial A1    6.050
    LGAP1  10.281
    PCAP1  11.951
    FUEL1 377.711
    PLEN1 393.711
    PCAP1 395.381
    LGAP1 397.501
```

The *axial* card tells the code how to place the lattices axially. The first parameter is the name of the assembly (A1), followed by a list of elevations and lattice types. For example, lattice "FUEL1" extends from 11.951 to 377.711 cm axially.

Multiple assembly types can be defined in a single [ASSEMBLY] block by using multiple *axial* cards, each with a unique assembly ID.

All axial elevations are defined relative to the top of the lower core plate.

2.3.5 Grid Spacer Descriptions

Grid cards are used to define unique grid spacer types. The following example defines two grid types, "END" and "MID".

```
grid END inc  1017  3.866   ! grid spacer material, mass(g), height(cm)
grid MID zirc  875  3.810
```

The grid types are placed axially with the *grid_axial* card:

```
grid_axial
    END  13.884
    MID  75.2
    MID 127.4
    MID 179.6
    MID 231.8
    MID 284.0
    MID 336.2
    END 388.2
```

The elevations are the midpoints of the spacer grid and are relative to the top of the lower core plate.

2.3.6 Nozzle Descriptions

The assembly nozzles are modeled in the neutronics codes as smeared materials. This is a very good approximation since the nozzles are not in the active fuel region and are mostly composed of water, steel, and zirconium. The user only specifies a nozzle mass and a nozzle height. The total volume of the nozzle region is calculated from the assembly pitch and nozzle height. The volume of the nozzle is calculated from the nozzle mass and density. The volume of the coolant is then calculated as the total volume minus the volume of the nozzle. The coolant density is updated with the local T/H conditions.

```
lower_nozzle  ss 6.05  6250.0  ! mat, height (cm), mass (g)
upper_nozzle  ss 8.827 6250.0  ! mat, height (cm), mass (g)
```

Only a single material can be specified on a nozzle card. If the user wants to use more than one material to define a nozzle, they can define a custom material that is a mixture of the materials and then use the custom material in the nozzle card.

Note that the *lower_nozzle* height should match the bottom elevation on the *axial* card. The *upper_nozzle* height + the top elevation on the *axial* card must match the core *height* in the [CORE] block. The input parser does not currently perform a check to make sure the elevations are consistent. Therefore, this check should be performed in each of the individual physics codes.

2.4 Control Rod Assembly Description

The [CONTROL] block contains the geometric description of a control assembly.

A control rod assembly is defined in the same way that a fuel assembly is defined. The user specifies cells, lattices, and axial descriptions of the control rod assembly. The main difference between the control rod assembly and the fuel assembly is that the control rod assembly describes what is inside the guide tubes and the fuel assembly defines the guide tubes themselves.

Control rod positions change during operation, so the geometric description of a control rod should always be for a rod in the **fully inserted** position. In the example below, the bottom of the control rod in the fully inserted position is at an axial location of 15.46 cm.

```
title "B4C control rods with AIC tips"
npin 17

cell 1  0.382 0.386 0.484 / aic he ss      ! AIC cell
cell 2  0.373 0.386 0.484 / b4c he ss      ! B4C cell

rodmap  AIC
   -
   - -
   - - -
   1 - - 1
   - - - - -
   - - - - - 1
   1 - - 1 - - -
   - - - - - - - -
   - - - - - - - - -

rodmap  B4C
   -
   - -
   - - -
   2 - - 2
   - - - - -
   - - - - - 2
   2 - - 2 - - -
   - - - - - - - -
   - - - - - - - - -

axial CR1 15.46 AIC  376.44 B4C  394.3
```

The name of the control rod "CR1" refers to the control rod type in the *crd_map* in the [CORE] block.

Control rods positions are assigned to a control rod bank with the *crd_bank* map in the [CORE] block, and then the banks are positioned with the *rodbank* card in the [STATE] block.

Note that the locations of the control rod fingers must match the guide tube locations in the corresponding [ASSEMBLY] block descriptions. Furthermore, the outer radii of the control rod fingers must be smaller than the inner radii of the guide tubes. The input parser does not currently perform a check to make sure the control rod finger descriptions are consistent with the guide tube descriptions. This check should be performed in each of the individual physics codes.

The user can define materials in the [CONTROL] block. These materials only have scope in this block and are not accessible by other blocks. See Chapter 3 for details.

A complete listing of all the input cards in the [CONTROL] block is located in Section 4.5.

2.4.1 Control Rod Stroke

The difference between control rod descriptions and assembly descriptions is that the control rods moves during operation. This movement is defined with a *stroke* card.

The first value on the *stroke* card is the total length of the control rod travel (stroke) from fully inserted to fully withdrawn.

The second value on the *stroke* card is the number of steps in the fully withdrawn position. Step 0 is the fully inserted position. The number of strokes in the fully withdrawn position is specified by the user, but 228 steps is often used for typical Westinghouse PWR's.

```
stroke  360.0 228      ! stroke (cm), number of steps fully withdrawn
```

To position the control rods in percent withdrawn (%), the number of steps should be set to 100 and each step will signify 1% withdrawn.

The geometry description in the input is for a control rod in the fully inserted position (step 0).

2.4.2 Control Rod Position Example

From the *axial* card shown above, the bottom of the AIC at the fully-inserted position is 15.46 cm. From the *stroke* card, the total stroke is 360.0 cm and the number of steps in the fully withdrawn position is 228 steps. Therefore, the bottom elevation of the AIC lattice at step N will be

$$E(N) = 15.46 + \frac{360.0 \cdot N}{228} \tag{2.4.1}$$

Using this formula, the bottom elevation of the AIC lattice at the following step positions is:

- step 228 (fully withdrawn)= 15.46 + 360.0 * 228 / 228 = 375.46 cm
- step 100 = 15.46 + 360.0 * 100 / 228 = 173.35 cm
- step 0 (fully inserted) = 15.46 + 360.0 * 0 / 228 = 15.46 cm

2.5 Insert Description

An assembly insert is defined in the same way as a fuel assembly or control rod assembly is defined. The user defines the insert using cells, lattices, and axial descriptions.

The fuel assembly description should contain the guide tube descriptions and the insert description defines what is inserted in the guide tubes. Assembly inserts can be inserted and withdrawn during a core shuffle (by specifying a *insert_map* card in the [CORE] block), but cannot be moved during a cycle depletion.

The insert and control rod descriptions are very similar, with the only difference being that the insert cannot change positions axially during a cycle depletion and a control rod moves axially during operations.

The following example shows a definition of a Pyrex insert.

```
[INSERT]
    title "Pyrex"
    npin 17
    mat pyrx1 2.25 pyrex-vera
    cell 1  0.214 0.231 0.241 0.427 0.437 0.484 / he ss he pyrx1 he ss
    rodmap  PY24
       -
       - -
       - - -
       1 - - 1
       - - - - -
       - - - - - 1
       1 - - 1 - - -
       - - - - - - - -
       - - - - - - - - -

    axial INS24  15.76 PY24 376.441
```

The name of the insert "INS24" refers to an insert type defined in the *insert_map* in the [CORE] block.

The locations of the insert fingers must match the guide tube locations in the corresponding [ASSEMBLY] block descriptions. In addition, the outer radii of the insert fingers must be smaller than the inner radii of the guide tubes. The input parser does not currently perform a check to make sure the insert finger descriptions are consistent with the guide tube descriptions. This check should be performed in each of the individual physics codes.

As with [ASSEMBLY] blocks, multiple insert types can be defined in a single [INSERT] block by using multiple *axial* cards, each with a unique insert ID.

A complete listing of all the input cards in the [INSERT] block is located in Section 4.6.

2.6 Detector Description

A detector string is defined in the same way that a fuel assembly or insert assembly is defined. The user defines cells, lattices, and axial descriptions for the detector string.

The insert and detector descriptions are very similar, with the difference being that detectors have special properties used to calculate instrumentation signals.

```
[DETECTOR]
  title "Incore instrument thimble"
  npin 17

  mat he 0.0001786
  mat ss 8.0

  cell 1  0.258 0.382 / he ss

  rodmap  LAT
     1
     - -
     - - -
     - - - -
     - - - - -
     - - - - - -
     - - - - - - -
     - - - - - - - -
     - - - - - - - - -

  axial D1  0.0 LAT 406.337
```

The name of the detector "D1" refers to a detector type defined in the *det_map* in the [CORE]

block.

A complete listing of all the input cards in the [DETECTOR] block is located in Section 4.7.

2.7 State Description

The [STATE] block defines the state of the core (power, flow, pressure, inlet temperature, rod positions, boron concentration, etc.) at a particular point in time. These values will typically change during a cycle depletion.

An example showing the most common input cards in the [STATE] block is shown below. A complete listing of all the input cards in the [STATE] block is located in Section 4.2.

```
[STATE]
  power   98.0       ! % of rated power - rated values defined in [CORE] block
  flow   100.0       ! % of rated flow
  pressure 2250.0    ! psia
  tinlet 557.33      ! F
  feedback on        ! turn on T/H feedback

  boron  1285        ! initial boron ppmB
  search 'boron'     ! turn on boron search

  sym qtr            ! run problem in qtr-symmetry

  rodbank SA 228
          SB 228
          SC 228
          SD 228
           A 228
           B 228
           C 228
           D 167
```

The *sym* card tells the code to run the calculation in full-core or qtr-core symmetry. If the calculation is run in qtr-core symmetry, the symmetry is either set to qtr-core rotational or qtr-core mirror by the *bc_sym* card in the [CORE] block.

The *rodbank* card is used to position the control rods. The *rodbank* input includes pairs of bank names and bank positions. The bank names correspond to the *crd_map* in the [CORE] block. The positions indicate the position of the control rod bank in steps. Step 0 is fully inserted. The number of steps for a rod to be completely withdrawn is set by the *stroke* card in the [CONTROL] block (see Section 2.4.1). For Westinghouse PWR's, a typical value of fully-withdrawn is 228 steps.

2.8 Edits Description

The [EDITS] block is used to control the output edits.

One of the edits produced by the core simulator is the rod power. The user has the ability to specify the axial levels that the power is averaged over with the *axial_edit_bounds* card. The user may choose to average power over uniform axial intervals (like most nodal codes), or to specify the edit intervals manually.

(Note: the edit options are under development and more options will be added in the future.)

A complete listing of all the input cards in the [EDITS] block is located in Section 4.8.

2.8.1 COBRA-TF Nodalization

The *axial_edit_bounds* card is also used to set the axial nodalization when coupling the neutronics physics code to the COBRA-TF (CTF) subchannel code.

When running CTF, there is a restriction that the grid boundaries must be explicitly included in the *axial_edit_bounds*. This can get a little complicated for the user. In the VERA input, spacer grids are defined in the [ASSEMBLY] block by specifying the grid heights on the *grid* card and the elevations of the grid midpoints on the *grid_axial* card. From the grid heights and midpoints, the elevations at the top and bottom of the spacer grid can be calculated, and then the top and bottom elevations must be included in the *axial_edit_bounds*.

For example, if a grid is defined with a centerline at 75.0 and a height of 2.5, then the *axial_edit_bounds* must include the points $75.0 \pm 1.25 = 73.75$ and 76.25.

```
[ASSEMBLY]
 grid GRID1 inc 1000 2.5    ! grid name, material, mass (g), and height (cm)
 grid_axial                 ! locations of grid midpoints (cm)
     GRID1 75.0

[EDITS]
 axial_edit_bounds
    ...
    73.75           ! this array must include top and bottom grid boundaries
    76.25
    ...
```

The reason for this restriction is because the power is already calculated on the *axial_edit_bounds*,

so it is natural to use the same power distribution to couple to the CTF model as well. The grids must be explicitly included in the CTF boundaries so the loss coefficients are calculated correctly.

In the future, this restriction may be lifted and an additional edit bounds array may be added explicitly for CTF calculations.

2.9 Coupling Description

The [COUPLING] block defines the relaxation parameters and convergence criteria to be used when coupling different physics codes. These values are used to determine convergence *between* physics codes. Convergence criteria *within* a physics code is controlled by the code-specific block.

Refer to Section 4.12 for a complete listing of all the cards in the [COUPLING] block.

No code-specific information is included in the [COUPLING] block. All code-specific information is contained in the code-specific blocks. The [COUPLING] block is only used to define generic coupling parameters.

As an example, consider the following multi-physics code coupling:

1. Run T/H calculation
2. Run neutronics calculation
3. Check eigenvalue convergence
4. Check power convergence
5. Relax/dampen the power shape
6. If not converged, go to step 1.

The eigenvalue convergence in step 3 uses the card *epsk* to check the change in eigenvalue between coupled iterations. There are additional eigenvalue convergence criteria *within* the neutronics code, but the internal parameters are specified in the individual code blocks.

The power convergence in step 4 uses the card *epsp* to check the change in power between coupled iterations.

Additional convergence checks are made on the peak fuel temperature, maximum change in density, and change in boron concentration (if applicable).

The example shown above uses a Picard iteration to converge. Picard iterations usually need to apply a relaxation factor (also called a damping factor or under-relaxation factor) to one or

more of the calculated quantities to converge. The relaxation factors are applied in the following manner:

$$x = \omega\, x^{\text{new}} + (1-\omega) x^{\text{old}} \tag{2.9.1}$$

where x is the calculated parameter and ω is the relaxation factor. A relaxation factor of 1.0 signifies no relaxation is performed. A relaxation factor < 1.0 signifies under-relaxation.

Relaxation factors can be specified for the point-wise power, point-wise temperature, and/or point-wise density. The relaxation is applied to the transferred quantities sent between physics codes. The state variables within each physics code are not changed.

An example [COUPLING] input block is shown below.

```
[COUPLING]
  epsk        5.0  ! eigenvalue convergence (pcm)
  eps_temp    1.0  ! temperature convergence (deg C)
  eps_boron   0.1  ! boron convergence (ppm)
  rlx_power   0.5  ! power relaxation factor
  rlx_tfuel   1.0  ! fuel temperature relaxation factor
  rlx_den     1.0  ! density relaxation factor
  maxiter     20   ! maximum number of coupled iterations
```

A complete listing of all the input cards in the [COUPLING] block is located in Section 4.12.

Chapter 3

Materials Description

This chapter contains a description of the material input. There are two types of materials in the input file – structural materials (input with a *mat* card) and fuel materials (input with a *fuel* card).

Structural materials can be defined in either the [CORE] block, or in the geometry object blocks [ASSEMBLY], [INSERT], [CONTROL], and [DETECTOR]. If the materials are defined in the [CORE] block, they have global scope. If the materials are defined in the geometry object blocks, they only have scope in the block they are defined. The reason for this is to maintain the modularity of the geometry objects.

Fuel materials can only be defined in [ASSEMBLY] blocks.

Materials are used in many different input cards. They are used to define cells, nozzles, core plates, baffles, grids, reflectors, etc. Every material that is used in the input must be defined with either a *mat* card or a *fuel* card.

3.1 Structural Materials

Structural materials are not fuel and do not deplete. Structural materials are defined with the following input card:

mat *user-mat density* (*library-name*$_i$, *frac*$_i$, i=1, I)

where:

- *user-mat* is a user-defined material name. It is case sensitive. *user-mat* is used to define material names in other input cards such as *cell*, *grid*, *nozzle*, etc. (No default)
- *density* is the material density in g/cc (No default)
- *library-name* is a corresponding material library name(s) for the user material. The library name must be defined in the material composition file. (Default = *user-mat*). Multiple library materials can be mixed to form a single user material.
- *frac* is the fraction of the library material in the user material. (Default=1.0 if there is only one library material in the user material).

There are two special user materials, "mod" and "vacuum". The user can use these materials in cell definitions, but the code will automatically determine the composition of these materials based on T/H feedback and soluble boron concentrations. The user is not allowed to define a user material named "mod" or "vacuum" on a *mat* card.

The material libraries are code-specific libraries. Please refer to the specific physics codes to determine which library materials are available.

Some example material cards are shown below.

```
mat zirc 6.56                   ! library-name defaults to user-name
mat zirx 6.56 zirc4 1.0         ! user-name does not equal to library-name
mat B10  12.0 boron 1.0
mat XYZ  6.0  zirc4 0.8 ss 0.2  ! define new mixture of 80% zirc4 and 20% ss
mat ABCD 8.0  zirc4 0.8 ss 0.15 b4c 0.05
```

All of the material fractions must sum to either +1.0 or -1.0. If positive fractions are used, the fractions refer to weight fractions. If negative fractions are used, the fractions refer to atomic fractions.

3.1.1 Search Order

Structural materials can be defined in either the [CORE] block or one of the geometry object blocks. When a material is referred to in a block, it will look for the material definition in the following order:

1. The code will first look for the material name in the local block ([ASSEMBLY], [INSERT], [CONTROL], or [DETECTOR])
2. If the material is not found in the local block, it will look in the [CORE] block

If materials are defined in the [CORE] block, they have global scope over the entire input. If materials are defined in other blocks, they only have scope over the local block. This means that two geometry object blocks can use different material definitions with the same name. One example of this is that two assemblies can be defined with the material "zirc", but the "zirc" can have different compositions in each of the assemblies.

3.2 Composition File

All library materials must be included in a material composition file. The composition file is a code-specific file which contains a list of all of the available library materials.

In Insilico, the composition file is specified in the [INSILICO] block *mat_library* card, and is usually named "casl_comp.sh5". In MPACT, the composition file is specified in the [MPACT] block.

Examples of typical library materials that are present on the composition file include:

- aic (silver-indium-cadmium)
- b4c (boron carbide)
- boron
- inc (Inconel)
- he (helium)
- ss (stainless steel)
- zirc (zirconium)
- zirc4 (Zircaloy-4)

Refer to the code-specific composition file for a complete list of valid library materials.

3.3 Fuel Materials

Fuel materials are defined with *fuel* cards. Fuel materials are heavy metal oxides which are usually UO_2 with different U-235 enrichments. Fuel materials may also include MOX fuel, which consists of mixtures of uranium, plutonium and other actinides. Fuel materials are different from structural materials in that they deplete and have additional properties as described below.

Fuel can only be defined in [ASSEMBLY] blocks, and fuel materials can only be referenced by *cell* cards in the [ASSEMBLY] block they are defined in.

Fuel materials are defined with the following input card:

fuel *user-mat density thden / U-235_enrichment* {$HM_material_i$=$HM_enrichment_i$, i=1, N} { / *gad_material*=*gad_fraction* }

Where:

- *user-mat* is a user-defined fuel name. It is case sensitive. (No default)
- *density* is the fuel material density in g/cc (No default)
- *thden* is the percent of theoretical density in the pellet (%) (No default)
- *U-235_enrichment* is the U-235 enrichment in the fuel in weight % (No default).
  - If U-234 and U-236 are not specified, they will automatically be added to the fuel by a pre-determined function (see below)
  - If the sum of the heavy metal (HM) enrichments does not equal 100%, the remainder of the HM composition will be assigned to U-238.
- $HM_material_i$ is the material name for HM isotope i (Pu-239, Pu-241, etc.) (optional) The names of the HM materials must be valid library-names.
- $HM_enrichment_i$ is the enrichment of HM isotope i in weight % (optional)
- *gad_material* is the material name for the gadolina oxide (or other material) (optional). The gad material is usually a mixture defined on a separate *mat* card.
- *gad_fraction* is the weight percent of the gad material relative to the total fuel mass (optional)

Oxygen should not be included on the *fuel* card. The correct amount of oxygen will automatically be added to the HM to create an oxide (either UO_2 or $(HM)O_2$).

The *density* is the "stack density" or "smeared density" and should include the volume of the pellet dishing and chamfers. It is calculated as the total mass of the fuel pellets divided by the total volume of the fuel

$$\text{stack density} = \frac{\text{(fuel mass)}}{\pi(\text{pellet radius})^2\,\text{(fuel height)}} \tag{3.3.1}$$

The *thden* refers to the actual theoretical density of the pellet. This quantity is used in fuel performance codes to evaluate material properties.

If U-234 or U-236 enrichments are not included in the fuel definition, they are automatically added to the fuel with the following formulas:

$$W_{234} = 0.007731 \cdot W_{235}^{1.0837} \tag{3.3.2}$$

$$W_{236} = 0.0046 \cdot W_{235} \tag{3.3.3}$$

Where W_{23x} is the enrichment of each of the uranium isotopes in percent.

If a user specifically does NOT want U-234 or U-236, they should specify a U-234 and/or U-236 enrichment of zero.

Examples of typical *fuel* cards are shown below. The user only has to specify the U-235 enrichment and the code will automatically add U-234, U-236, U-238, and oxygen to the fuel.

```
fuel U21 10.4 95.2 / 2.1        ! 2.1% enriched UO2 fuel, no gad
fuel UO2-35 10.297 95.0 / 3.5   ! 3.5% enriched UO2 fuel, no gad
fuel U23    10.111 / 2.3        ! fuel with default thden
```

An example of a *fuel* card with gadolinia burnable poison is shown next. In this example, the gadolinia oxide is first defined with a *mat* card and is mixed with the fuel as 5% gad oxide and 95% UO_2 (weight percents).

```
mat gad5 7.407 gd2o3 1.0                ! define gad material separately
fuel U49 10.111 94.5 / 1.8  / gad5=0.05 ! 1.8% enriched fuel with 5% gad
```

Some examples of MOX fuel cards are shown next. In these cards, the user specifies the U-235 enrichment (the U-235 enrichment is usually small in MOX fuel) and the plutonium isotope enrichments. The code will automatically add U-234, U-236, U-238, and oxygen.

```
fuel PX1  10.111 94.5 / 0.711 Pu-239=23.4 Pu-241=1.9    ! Sample MOX fuel
fuel MOX1 10.111 94.5 / 1.0   Pu-238=1.0  Pu-239=26.0
                  Pu-240=12.0 Pu-241=8.0 Pu-242=3.0
```

Only oxide fuel can be defined on the *fuel* card. Metallic fuel is not supported.

Chapter 4

Input Card Descriptions

This chapter contains a complete listing of the available input cards.

The input for each block is given in separate subsections.

In this chapter, input cards are given in **bold** text followed by the parameters on the card. Following each input card is a description of the parameters on that card.

An example of an input card is:

card_name param1, param2

param1 The first parameter on card (units)

param2 The second parameter on card (units)

4.1 Block CASEID

[CASEID]

title case_id

case_id Problem name

4.2 Block STATE

[STATE]

title title

title Statepoint title

power power

power Operating power (percent of rated power)

flow flow

flow Operating flow (percent of rated flow)

bypass bypass

bypass Bypass flow (percent of rated flow)

tinlet tinlet

tinlet Inlet temperature (degrees F)

tfuel tfuel

tfuel Fixed fuel temperatures (degrees K) - Only used without T/H feedback

modden modden

modden Fixed moderator density (g/cc) - Only used without T/H feedback

xenon xenopt

xenopt Xenon option (“zero”, “dep”, or “equil”)

samar samopt

samopt Samarium option (“zero”, “dep”, “equil”, or “peak”)

boron boron

boron Soluble boron concentration (ppm)

kcrit kcrit

kcrit Critical eigenvalue used in boron search

search search

search Search option ("keff" or "boron")

pressure pressure

pressure Core exit pressure (psia)

deplete deplete_units, deplete

deplete_units Depletion units ("EFPD", "GWDMT", "hours")

deplete List of depletion exposure steps - only used with depletion

rodbank bank_pos, bank_labels

bank_pos Steps withdrawn for each bank in list

bank_labels List of control rod banks to position. Labels correspond to crd_map in CORE block.

feedback feedback

feedback Flag to turn on and off T/H feedback ("on" or "off"). Currently not used, feedback is controlled by executable that is run.

sym sym

sym Core fraction to run problem in ("full" or "qtr")

4.3 Block CORE

[CORE]

name core_name

core_name Name of the reactor core

cycle cycle_num, cyc_stdate, cyc_edate

cycle_num Cycle number

cyc_stdate Cycle startup date (YYYYMMDD)

cyc_edate Cycle end date (YYYYMMDD). Enter zero if end date is not known.

size core_size

core_size Number of assemblies across one axis in full-core geometry (required)

rated rated_power, rated_flow

rated_power	Rated thermal power at 100% power (MW)
rated_flow	Rated vessel flow at 100% flow (Mlbs/hr)

apitch apitch

apitch	Assembly pitch (cm)

baffle baffle_mat, baffle_gap, baffle_thick

baffle_mat	Baffle material
baffle_gap	Gap between outside assembly (including assembly gap) and baffle (cm)
baffle_thick	Thickness of baffle (cm)

vessel vessel_mats, vessel_radii

vessel_mats	Vessel materials
vessel_radii	Vessel radii (cm)

core_shape shape

shape	Square map showing the fuel assembly locations. Enter 1 for fuel assembly locations and 0 for empty locations.

rotate_map rotate_map

rotate_map	Core map of assembly rotations (0-3)

assm_map assm_map

assm_map	Core map of the fuel assembly types. The assembly types correspond to assembly labels in the ASSEMBLY block. All fuel assemblies must have a type defined.

insert_map insert_map

insert_map	Core map of the fuel insert types and locations. The insert types correspond to insert labels in the INSERT block. Use a dash to specify assemblies with no inserts.

det_map det_map

det_map	Core map of the detector types and locations. The detector types correspond to detector labels in the DETECTOR block. Use a dash to specify assemblies with no detectors.

crd_map crd_map

crd_map	Core map of the control rod types and locations. The control rod types correspond to control rod labels in the CONTROL block. Use a dash to specify assemblies with no control rods.

crd_bank crd_bank

crd_bank Core map of the control rod bank labels. These labels are used to position groups of control rods by bank label. Use a dash to specify assemblies with no control rods.

lower_plate lower_mat, lower_thick, lower_vfrac

lower_mat Lower core plate material

lower_thick Lower core plate thickness (cm)

lower_vfrac Lower core plate volume fraction. Remainder of volume fraction will be filled with coolant.

upper_plate upper_mat, upper_thick, upper_vfrac

upper_mat Upper core plate material

upper_thick Upper core plate thickness (cm)

upper_vfrac Upper core plate volume fraction. Remainder of volume fraction will be filled with coolant.

bc_sym bc_sym

bc_sym Symmetry flag for the core when using qtr-symmetry. Flag is not used in full-symmetry. Valid options are “rot” and “mir”.

bc_bot bc_bot

bc_bot Bottom neutron transport boundary condition, “vacuum” (default) or “reflecting”.

bc_top bc_top

bc_top Top neutron transport boundary condition, “vacuum” (default) or “reflecting”.

bc_rad bc_rad

bc_rad Radial neutron transport boundary condition, “vacuum” (default) or “reflecting”.

xlabel xlabel

xlabel List of 2-character assembly position labels in x-direction. These values are used in the edit maps.

ylabel ylabel

ylabel List of 2-character assembly position labels in y-direction. These values are used in the edit maps.

height height

height Total axial distance from bottom core plate to upper core plate (cm). Distance does not include core plate thicknesses.

mat mat

mat See detailed Materials description.

lower_ref lower_refl_mats, lower_refl_thicks, lower_refl_vfracs

lower_refl_mats Lower reflector materials

lower_refl_thicks Lower reflector thicknesses (cm)

lower_refl_vfracs Lower reflector volume fractions

upper_ref upper_refl_mats, upper_refl_thicks, upper_refl_vfracs

upper_refl_mats Upper reflector materials

upper_refl_thicks Upper reflector thicknesses (cm)

upper_refl_vfracs Upper reflector volume fractions

4.4 Block ASSEMBLY

[**ASSEMBLY**]

title title

title Long descriptive title for assembly.

npin num_pins

num_pins The number of rods along the edge of an assembly.

ppitch ppitch

ppitch Cell pitch (cm)

cell cell

cell Refer to the cell description given in the User's Manual.

rodmap axial_label, cell_map

axial_label Label for this axial elevation description.

cell_map Lattice map for this axial elevation. Use a dash for an empty location.

axial label, axial_labels, axial_elevations

label Label for this assembly. Label corresponds to assm_map in CORE block.

axial_labels List of axial labels for this assembly description. Corrrespond to labels in lattice maps.

axial_elevations List of axial elevations for this assembly description (cm).

dancoff dancoff_map

dancoff_map Lattice map of dancoff factors (not currently used in the calculation).

grid label, material, mass, height

label Grid label for a single grid type.

material Grid material for this grid type.

mass Grid mass for this grid type (g).

height Grid height for this grid type (cm).

grid_axial grid_map, grid_elev

grid_map List of spacer grid labels for all grids in an assembly (labels correspond to grid card)

grid_elev List of spacer grid elevations for all grids in an assembly (cm). Elevations refer to the grid midpoint.

lower_nozzle lower_nozzle_comp, lower_nozzle_height, lower_nozzle_mass

lower_nozzle_comp Lower nozzle material.

lower_nozzle_height Lower nozzle height (cm)

lower_nozzle_mass Lower nozzle mass (g). Code will calculate the volume of the nozzle given the nozzle mass, and use coolant for remaining volume.

upper_nozzle upper_nozzle_comp, upper_nozzle_height, upper_nozzle_mass

upper_nozzle_comp Upper nozzle material.

upper_nozzle_height Upper nozzle height (cm)

upper_nozzle_mass Upper nozzle mass (g). Code will calculate the volume of the nozzle given the nozzle mass, and use coolant for remaining volume.

fuel fuel

fuel See detailed Materials description.

mat mat

mat See detailed Materials description.

4.5 Block CONTROL

[CONTROL]

title title

title Long descriptive title for control rod description.

npin num_pins

num_pins The number of rods along the edge of an assembly.

stroke stroke, maxstep

stroke Control rod stroke - distance between full-insertion and full-withdrawal (cm)

maxstep Total number of steps between full-insertion and full-withdrawal

cell Cell

Cell Refer to the cell description given in the User's Manual.

rodmap label, cell_map

label Label for this axial elevation description

cell_map Lattice map for this axial elevation. Use a dash for no control rod.

axial control_label, axial_labels, axial_elevations

control_label Label for this control rod description. Label corresponds to crd_map in CORE block.

axial_labels List of axial labels for this control rod description. Corrrespond to labels in rod maps.

axial_elevations List of axial elevations for this control rod description (cm).

mat mat

mat See detailed Materials description.

4.6 Block INSERT

[INSERT]

title title

title Long descriptive title for assembly insert description.

npin num_pins

num_pins The number of rods along the edge of an assembly.

cell Cell

Cell Refer to the cell description given in the User's Manual.

rodmap label, cell_map

label Label for this axial elevation description

cell_map Lattice map for this axial elevation. Use a dash for no insert rod.

axial insert_label, axial_labels, axial_elevations

insert_label Label for this assembly insert description. Label corresponds to insert_map in CORE block.

axial_labels List of axial labels for this assembly insert description. Corrrespond to labels in rod maps.

axial_elevations List of axial elevations for this assembly insert description (cm).

mat mat

mat See detailed Materials description.

4.7 Block DETECTOR

[DETECTOR]

title title

title Long descriptive title for detector description.

npin num_pins

num_pins The number of rods along the edge of an assembly.

cell Cell

Cell Refer to the cell description given in the User's Manual.

rodmap label, cell_map

label Label for this axial elevation description

cell_map Lattice map for this axial elevation. Use a dash for no detector rod.

axial detector_label, axial_labels, axial_elevations

detector_label Label for this detector description. Label corresponds to det_map in CORE block.

axial_labels List of axial labels for this detector description. Corrrespond to labels in rod maps.

axial_elevations List of axial elevations for this detector description (cm).

mat mat

mat See detailed Materials description.

4.8 Block EDITS

[EDITS]

axial_edit_bounds axial_edit_bounds

axial_edit_bounds The boundaries of the axial regions over which axial information should be printed.

axial_edit_mesh_delta axial_edit_mesh_delta

axial_edit_mesh_delta Produces a uniform axial output grid (integrates pin powers over a uniform axial mesh).

4.9 Block COBRATF

[COBRATF]

nfuel nfuel

nfuel Number of radial nodes in fuel pellet.

nc nc

nc Conduction option (see CTF Manual).

irfc irfc

irfc Friction factor correlation number (see CTF Manual).

dhfrac dhfrac

dhfrac Fraction of power deposited directly in coolant.

hgap hgap

hgap Gap conductance (W/m^2 K)

gridloss gridlabel, gridloss

gridlabel Spacer grid label (from ASSEMBLY block).

gridloss Spacer grid loss coefficient.

epso epso

epso Inactive option - ignored by code.

oitmax oitmax

oitmax Inactive option - ignored by code

iitmax iitmax

iitmax Inactive option - ignored by code

dtmin dtmin

dtmin Minimum time step (s).

dtmax dtmax

dtmax Maximum time step (s).

tend tend

tend End of time domain (s).

rtwfp rtwfp

rtwfp Ratio of time step sizes for conduction/fluid.

maxits maxits

maxits Maximum number of iterations.

courant courant

courant Courant limit

maps_filename maps_filename

maps_filename Name of HDF5 and VTK files

heated_elements_type heated_elements_type

heated_elements_type 0=model nuclear fuel rods, 1=model electric heater tubes. If you select electric heater tubes, all heater rods in the model will be electric heater tubes and you must input the inside diameter, outside diameter, and pitch of the tubes.

heater_tube_id heater_tube_id

heater_tube_id Heater tube inside diameter (cm)

heater_tube_od heater_tube_od

heater_tube_od Heater tube outside diameter (cm)

heater_tube_pitch heater_tube_pitch

heater_tube_pitch Heater tube pitch (cm)

solver solver

solver Pressure matrix solver (See ISOL in CTF Manual)

parallel parallel

parallel 0=serial execution, 1=parallel exectution. Parallelization is on a per-assembly basis.

global_energy_balance global_energy_balance

global_energy_balance Steady-state convergence criteria for balance of energy in the model

global_mass_balance global_mass_balance

global_mass_balance Steady-state convergence criteria for balance of mass in the model

fluid_energy_storage fluid_energy_storage

fluid_energy_storage Steady-state convergence criteria for transient storage of energy in fluid

solid_energy_storage solid_energy_storage

solid_energy_storage Steady-state convergence criteria for transient storage of energy in solids

mass_storage mass_storage

mass_storage Steady-state convergence criteria for transient storage of mass in fluid

edit_gaps edit_gaps

edit_gaps Edit flag to turn on gap output file (1=generate file)

edit_channels edit_channels

edit_channels Edit flag to turn on channel output file (1=generate file)

edit_rods edit_rods

edit_rods Edit flag to turn on rod edits (temperatures) in deck.out file (1=generate file)

edit_dnb edit_dnb

edit_dnb Edit flag to turn on DNB output file (1=generate file)

4.10 Block INSILICO

[INSILICO]

Please refer to the Insilico documentation for a listing of all the cards in the [INSILICO] block.

4.11 Block MPACT

[MPACT]

Please refer to the MPACT documentation for a listing of all the cards in the [MPACT] block.

4.12 Block COUPLING

[COUPLING]

epsk epsk

epsk Eigenvalue converence criteria (pcm)

epsp epsp

epsp Power convergence criteria (L2 norm)

eps_temp eps_temp

eps_temp Temperature convergence criteria (degrees F)

eps_boron eps_boron

eps_boron Boron convergence criteria (ppm)

rlx_power rlx_power

rlx_power Power relaxation factor. Recommend 0.5.

rlx_tfuel rlx_tfuel

rlx_tfuel Fuel temperature relaxation factor. Recommend 1.0.

rlx_den rlx_den

rlx_den Density relaxation factor. Recommend 1.0.

maxiter maxiter

maxiter Maximum number of coupled iterations.

read_restart read_restart

read_restart Name of restart file. Leave blank for no restart.

LIME_xml LIME_xml

LIME_xml Name of LIME XML file. The use of this card is deprecated, the LIME XML file is now created automatically. See the LIME Users Manual for more information.

Chapter 5

Examples

This chapter includes several input examples. Additional examples can be found in the VERAIn Git repository.

5.1 Example 1 – Full-Core

The first example is a complete input for a full-core problem. This problem is Problem 7 of the CASL Progression Benchmark Problems and is based upon the publicly available description of the Watts Bar reactors.

More information on this example problem can be found in the following CASL reports:

- Gehin, J., A. Godfrey, F. Franceschini, T. Evans, B. Collins, S. Hamilton, "Operational Reactor Model Demonstration with VERA: Watts Bar Unit 1 Cycle 1 Zero Power Physics Test", CASL Technical Report: CASL-U-2013-0105-001, June 2013.
- "Demonstration and Neutronics Coupled to Thermal-Hydraulics for a Full-Core Problem using VERA", CASL Technical Report: CASL-U-2013-0196-000, December 2013.

```
!
!  Sample Test case for Problem 7 (Full-Core HFP)
!
[CASEID]
  title 'CASL Progression Problem 7 - Watts Bar Unit 1 Cycle 1 - Public'

[STATE]
  power  100.0          ! % of rated power
  flow   100.0          ! % of rated flow
  pressure 2250.0
  feedback on

  tinlet 557.33         ! F - 565K
  tfuel  900.0          ! K     (HFP value)
  boron  1285           ! ppmB
  modden 0.743          ! g/cc
  sym qtr

  rodbank SA 230
          SB 230
          SC 230
          SD 230
           A 230
           B 230
           C 230
           D 167

[CORE]
  size 15               ! assemblies across core
  rated 3411 131.68     ! MW, Mlbs/hr
  apitch 21.5
  height 406.337

  core_shape
    0 0 0 0 1 1 1 1 1 1 1 0 0 0 0
    0 0 1 1 1 1 1 1 1 1 1 1 1 0 0
    0 1 1 1 1 1 1 1 1 1 1 1 1 1 0
    0 1 1 1 1 1 1 1 1 1 1 1 1 1 0
    1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
    1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
    1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
    1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
    1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
    1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
    1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
    0 1 1 1 1 1 1 1 1 1 1 1 1 1 0
```

```
  0 1 1 1 1 1 1 1 1 1 1 1 1 0
  0 0 1 1 1 1 1 1 1 1 1 1 0 0
  0 0 0 0 1 1 1 1 1 1 1 0 0 0 0

assm_map
  1
  2 1
  1 2 1
  2 1 2 1
  1 2 1 2 2
  2 1 2 1 2 3
  1 3 1 3 3 3
  3 3 3 3

insert_map
   -
  20  -
   - 24  -
  20  - 20  -
   - 20  - 20  -
  20  - 16  - 24 12
   - 24  - 16  -  -
  12  -  8  -

crd_map
  1
  - -
  1 - 1
  - - - 1
  1 - - - 1
  - 1 - 1 - -
  1 - 1 - 1 -
  - - - -

crd_bank
  D  -  A  -  D  -  C  -
  -  -  -  -  - SB  -  -
  A  -  C  -  -  -  B  -
  -  -  -  A  - SC  -  -
  D  -  -  -  D  - SA
  - SB  - SD  -  -  -
  C  -  B  - SA  -
  -  -  -  -

det_map
          1 - - 1 - - -
```

```
        1 - - - 1 - - 1 - 1 -
      - 1 - 1 - - 1 - - - - - 1
      - - - - 1 - - 1 - - 1 - -
    1 - - - 1 - - 1 - - 1 - - - 1
    - - - - 1 - 1 - - - - 1 - - -
    - 1 - - - - - - - 1 - 1 - - - 1
    1 - 1 - 1 - 1 - - 1 - 1 1 1 -
    - - - 1 - - 1 - - 1 - - 1 - -
    1 - 1 - - 1 - 1 - - - - - 1 -
    - - - - 1 - - - 1 - 1 - 1 - -
      1 1 - - - - 1 - - - - - -
      - - - - - - 1 - 1 - 1 - 1
        1 - - 1 - 1 - - - - -
            - - 1 - - 1 -

  baffle ss 0.19 2.85
  vessel mod 219.71 cs 241.70

  lower_plate ss  5.0 0.5   ! mat, thickness, vol frac
  upper_plate ss  7.6 0.5   ! mat, thickness, vol frac

  lower_ref  mod 20.0 1.0   ! mat, thickness, vol frac
  upper_ref  mod 20.0 1.0   ! mat, thickness, vol frac

  xlabel  R P N M L K J H G  F  E  D  C  B  A
  ylabel  1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

  mat he     0.0001786
  mat inc    8.19
  mat ss     8.0
  mat zirc   6.56 zirc4

[ASSEMBLY]
  title "Westinghouse 17x17 Assembly"
  npin 17
  ppitch 1.260

  fuel U21 10.257 94.5 / 2.110
  fuel U26 10.257 94.5 / 2.619
  fuel U31 10.257 94.5 / 3.100

  cell 1     0.4096 0.418 0.475 / U21 he zirc
  cell 2     0.4096 0.418 0.475 / U26 he zirc
  cell 3     0.4096 0.418 0.475 / U31 he zirc
  cell 4            0.561 0.602 / mod    zirc       ! guide/instrument tube
  cell 5            0.418 0.475 /     he zirc       ! plenum
```

```
rodmap LAT21
     4
     1 1
     1 1 1
     4 1 1 4
     1 1 1 1 1
     1 1 1 1 1 4
     4 1 1 4 1 1 1
     1 1 1 1 1 1 1 1
     1 1 1 1 1 1 1 1 1

rodmap LAT26
     4
     2 2
     2 2 2
     4 2 2 4
     2 2 2 2 2
     2 2 2 2 2 4
     4 2 2 4 2 2 2
     2 2 2 2 2 2 2 2
     2 2 2 2 2 2 2 2 2

rodmap LAT31
     4
     3 3
     3 3 3
     4 3 3 4
     3 3 3 3 3
     3 3 3 3 3 4
     4 3 3 4 3 3 3
     3 3 3 3 3 3 3 3
     3 3 3 3 3 3 3 3 3

rodmap PLEN
     4
     5 5
     5 5 5
     4 5 5 4
     5 5 5 5 5
     5 5 5 5 5 4
     4 5 5 4 5 5 5
     5 5 5 5 5 5 5 5
     5 5 5 5 5 5 5 5 5

axial  1  11.951 LAT21 377.711 PLEN 393.711
```

```
  axial  2  11.951 LAT26 377.711 PLEN 393.711
  axial  3  11.951 LAT31 377.711 PLEN 393.711

  grid END inc  1017 3.866
  grid MID zirc 875  3.810

  grid_axial
      END  13.884
      MID  75.2
      MID 127.4
      MID 179.6
      MID 231.8
      MID 284.0
      MID 336.2
      END 388.2

  lower_nozzle  ss 6.053 6250.0  ! mat, height, mass (g)
  upper_nozzle  ss 8.827 6250.0  ! mat, height, mass (g)

[INSERT]
  title "Pyrex"
  npin 17

  mat pyrx1 2.25 pyrex-vera

  cell 1  0.214 0.231 0.241 0.427 0.437 0.484 / he ss he pyrx1 he ss

  rodmap  PY8
     -
     - -
     - - -
     1 - - -
     - - - - -
     - - - - - 1
     - - - - - - - -
     - - - - - - - - -
     - - - - - - - - - -

  rodmap  PY12
     -
     - -
     - - -
     1 - - -
     - - - - -
     - - - - - -
     - - - 1 - - -
```

```
      - - - - - - - -
      - - - - - - - - -

   rodmap  PY16
      -
      - -
      - - -
      1 - - -
      - - - - -
      - - - - - 1
      - - - 1 - - -
      - - - - - - - -
      - - - - - - - - -

   rodmap  PY20
      -
      - -
      - - -
      1 - - -
      - - - - -
      - - - - - 1
      1 - - 1 - - -
      - - - - - - - -
      - - - - - - - - -

   rodmap  PY24
      -
      - -
      - - -
      1 - - 1
      - - - - -
      - - - - - 1
      1 - - 1 - - -
      - - - - - - - -
      - - - - - - - - -

   axial   8  15.761 PY8  376.441
   axial  12  15.761 PY12 376.441
   axial  16  15.761 PY16 376.441
   axial  20  15.761 PY20 376.441
   axial  24  15.761 PY24 376.441

 [CONTROL]
   title "B4C with AIC tips"
   npin 17
   stroke  365.125 230     ! approx for 1.5875 step sizes and 230 max stroke
```

```
   mat aic 10.2
   mat b4c 1.76

   cell 1  0.382 0.386 0.484 / aic he ss
   cell 2  0.373 0.386 0.484 / b4c he ss

   rodmap AIC
      -
      - -
      - - -
      1 - - 1
      - - - - -
      - - - - - 1
      1 - - 1 - - -
      - - - - - - - -
      - - - - - - - - -

   rodmap B4C
      -
      - -
      - - -
      2 - - 2
      - - - - -
      - - - - - 2
      2 - - 2 - - -
      - - - - - - - -
      - - - - - - - - -

   axial  1    17.031
          AIC 118.631
          B4C 377.711

[DETECTOR]
  title "Incore instrument thimble"
  npin 17

  mat he 0.0001786
  mat ss 8.0

  cell 1  0.258 0.382 / he ss

  rodmap  LAT
     1
     - -
     - - -
```

```
      - - - -
      - - - - -
      - - - - - -
      - - - - - - -
      - - - - - - - -
      - - - - - - - - -

  axial 1  0.0 LAT 406.337

[EDITS]
  axial_edit_bounds
       11.951   15.817   24.028   32.239   40.45
       48.662   56.873   65.084   73.295   77.105
       85.17    93.235  101.3    109.365  117.43
      125.495  129.305  137.37   145.435  153.5
      161.565  169.63   177.695  181.505  189.57
      197.635  205.7    213.765  221.83   229.895
      233.705  241.77   249.835  257.9    265.965
      274.03   282.095  285.905  293.97   302.035
      310.1    318.165  326.23   334.295  338.105
      346.0262 353.9474 361.8686 369.7898 377.711

[COBRATF]
  nfuel   3             ! number of fuel rings in conduction model
  nc      1             ! conduction option - radial conduction
  irfc    2             ! friction factor correlation default=2
  dhfrac  0.02          ! fraction of power deposited directly into coolant
  hgap    5678.3        ! gap conductance
  gridloss END 0.9070   ! spacer grid loss coefficient
  gridloss MID 0.9065   ! spacer grid loss coefficient
  dtmin   0.000001
  dtmax   0.1
  tend    0.1
  rtwfp   1000.0
  maxits  10000
  courant 0.8

[COUPLING]
  epsk        5.0  ! pcm
  epsp        1.0e-4
  rlx_power   0.6
  rlx_tfuel   1.0
  rlx_den     1.0
  maxiter     100
```

5.2 Example 2 – Single-Assembly

The second example is a partial input for a single-assembly with T/H feedback. This problem is Problem 6 of the CASL Progression Benchmark Problems.

A single-assembly is defined by creating a core with one assembly in it, as described in the small-core geometry discussion in Section 2.2.5.

This input is also used to demonstrate the modular structure of the input. The [ASSEMBLY], [EDITS], [INSILICO], [COBRATF], and [COUPLING] blocks are identical to Example Problem 1, and show how blocks can be re-used in different input decks. These blocks are not included here, but can be copied directly from the first example problem if the user wishes to run this problem.

```
[CASEID]
  title 'CASL Benchmark Progression Problem 6'
!====================================================================
!  Sample input for Problem 6 (Single-assembly with T/H feedback)
!====================================================================

[STATE]
  power  100.0          ! %
  tinlet 559.0          ! F
  boron  1300           ! ppmB
  pressure 2250         ! psia

  feedback on
  sym full

[CORE]
  size 1                ! 1x1 single-assembly

 ! The rated power and flow are scaled down for a single-assembly
  rated 17.67   0.6824  ! rated power and flow (MW, Mlbs/hr)

  apitch 21.5           ! assembly pitch (cm)
  height 406.328        ! core height (cm)

  core_shape
    1                   ! core map with a single assembly

  assm_map
    A1                  ! name of assembly

  lower_plate ss 5.0 0.5    ! material, thickness (cm), vol frac
  upper_plate ss 7.6 0.5    ! material, thickness (cm), vol frac
  lower_ref   mod 26.0 1.0  ! material, thickness (cm), vol frac
  upper_ref   mod 25.0 1.0  ! material, thickness (cm), vol frac

  bc_rad reflecting         ! boundary condition

! Materials defined in the [CORE] block are global and can be accessed
! from any assembly, insert, etc.

  mat he     0.000176       ! list of materials and densities
  mat inc    8.19           ! The library-name defaults to user-name
  mat ss     8.0
  mat zirc   6.56 zirc4
  mat aic   10.20
  mat pyrex  2.23
```

```
  mat b4c    6.56

include 'assembly.inc'  ! Include [ASSEMBLY] block from Example 1
include 'edits.inc'     ! Include [EDITS]    block from Example 1
include 'insilico.inc'  ! Include [INSILICO] block from Example 1
include 'cobratf.inc'   ! Include [COBRATF]  block from Example 1
include 'coupling.inc'  ! Include [COUPLING] block from Example 1
```

5.3 Example 3 – 2D Lattice Geometry

The third example is a complete input for a 2D lattice. This problem is Problem 2A of the CASL Progression Benchmark Problems.

A single-assembly is defined by creating a core with a one assembly in it, as described in the small-core geometry description in Section 2.2.5.

The 2D lattice is defined by specifying an *axial* card with one level and defining reflective boundary conditions on the top and bottom of the core with the *bc_top* and *bc_bot* input cards.

This example problem also shows how multiple assembly, insert, and control types can be defined by using multiple *axial* cards in a single input block.

```
[CASEID]
  title 'CASL AMA Benchmark Problem 2A - Fuel Lattice - Public'

[STATE]
  power 0.0                              ! %
  tinlet 557.33                          ! F
  tfuel 565                              ! K
  modden 0.743                           ! g/cc
  boron 1300                             ! ppm
  rodbank A 1                            ! rod fully withdrawn
  sym qtr

[CORE]
  size 1
  apitch 21.50
  height 1.0
  rated 0.01 0.01

  core_shape
    1

  assm_map
    ASSY

  insert_map
    -

  crd_map
    AIC

  crd_bank
    A

  bc_rad reflecting
  bc_top reflecting   ! specify top reflective boundary conditions
  bc_bot reflecting   ! specify bottom reflective boundary conditions

[ASSEMBLY]
  npin 17
  ppitch 1.26

! material definitions in an ASSEMBLY block only have scope in this block

  fuel U31 10.257 94.5 / 3.1
  mat he 0.000176
```

```
  mat zirc 6.56 zirc4

  cell 1 0.4096 0.418 0.475 / U31 he zirc
  cell 2        0.561 0.602 / mod zirc

  rodmap LAT
    2
    1 1
    1 1 1
    2 1 1 2
    1 1 1 1 1
    1 1 1 1 1 2
    2 1 1 2 1 1 1
    1 1 1 1 1 1 1 1
    1 1 1 1 1 1 1 1 1

  axial ASSY 0.0 LAT 1.0

[INSERT]
  title "Pyrex"
  npin 17

! material definitions in an INSERT block only have scope in this block

  mat he     0.0001786
  mat pyrx1  2.25 pyrex-vera
  mat ss     8.0

  cell 1  0.214 0.231 0.241 0.427 0.437 0.484 / he ss he pyrx1 he ss

  rodmap  LAT8
     -
     - -
     - - -
     1 - - -
     - - - - -
     - - - - - 1
     - - - - - - -
     - - - - - - - -
     - - - - - - - - -

  rodmap  LAT12
     -
     - -
     - - -
     1 - - -
```

```
      - - - - -
      - - - - - -
      - - - 1 - - -
      - - - - - - - -
      - - - - - - - - -

   rodmap  LAT16
      -
      - -
      - - -
      1 - - -
      - - - - -
      - - - - - 1
      - - - 1 - - -
      - - - - - - - -
      - - - - - - - - -

   rodmap  LAT20
      -
      - -
      - - -
      1 - - -
      - - - - -
      - - - - - 1
      1 - - 1 - - -
      - - - - - - - -
      - - - - - - - - -

   rodmap  LAT24
      -
      - -
      - - -
      1 - - 1
      - - - - -
      - - - - - 1
      1 - - 1 - - -
      - - - - - - - -
      - - - - - - - - -

! multiple INSERT types can be defined by defining separate axial cards

   axial PY8   0.0 LAT8  1.0
   axial PY12  0.0 LAT12 1.0
   axial PY16  0.0 LAT16 1.0
   axial PY20  0.0 LAT20 1.0
   axial PY24  0.0 LAT24 1.0
```

```
[CONTROL]
  title "B4C and AIC RCCAs"
  npin 17
  stroke  1.0 1           ! 1 step for in/out

! material definitions in a CONTROL block only have scope in this block

  mat he     0.0001786
  mat ss     8.0
  mat aic   10.2
  mat b4c    1.76

  cell 1  0.382 0.386 0.484 / aic he ss
  cell 2  0.373 0.386 0.484 / b4c he ss

  rodmap LAT_AIC
     -
     - -
     - - -
     1 - - 1
     - - - - -
     - - - - - 1
     1 - - 1 - - -
     - - - - - - - - -
     - - - - - - - - - -

  rodmap LAT_B4C
     -
     - -
     - - -
     2 - - 2
     - - - - -
     - - - - - 2
     2 - - 2 - - -
     - - - - - - - - -
     - - - - - - - - - -

  axial AIC  0.0 LAT_AIC 1.0
  axial B4C  0.0 LAT_B4C 1.0

[INSILICO]
  silo_output 'p2'
  dimension 2

  eq_set bld_2d
```

```
eigen_solver power_iteration
tolerance 1e-5
Pn_order 1
k_tolerance 1e-5
L2_tolerance 0.001
energy_dep_ev true
upscatter_tolerance 1e-5

mesh 16
num_groups 23

num_blocks_i 4
num_blocks_j 4
num_sets 2

quad_type qr
azimuthals_octant 4
polars_octant 4

mat_library casl_comp_r2.sh5
xs_library v252

new_grp_bounds
  8.2085e+05
  1.1109e+05
  5.5308e+03
  1.8644e+02
  3.7612e+01
  3.5379e+01
  2.7697e+01
  2.1684e+01
  2.0397e+01
  1.5968e+01
  7.1500e+00
  6.7000e+00
  6.3000e+00
  1.0970e+00
  1.0450e+00
  9.5000e-01
  3.5000e-01
  2.0600e-01
  1.0700e-01
  5.8000e-02
  2.5000e-02
  1.0000e-02
  1.0000e-05
```