


< 3D Models < Gadgets < Other Gadgets

Desk radar (flightradar) V9 Final



GeGe

@GeGe_394550

Follow

Gadget that shows flight data about planes near Your location!

Download

Like



Share



Search

3D Models Store Clubs Community Contests Brands Events Groups

Table of Contents

- The desk Flight radar. Version 9 - easy assembly.
- SOCIALS.
- PARTS LIST. (about 8-11Euros)
- INSTSRUCTIONS. (please look at the detailed instructions PDF).
 - 1.Connect the pins based on the pinout.

Expand Table of Contents

The desk Flight radar. Version 9 - easy assembly.

our feedback



SO

Share y



SCORD: homerjsimpson

My GITHUB: <https://github.com/arvis91/deskradar>

Etsy

My Etsy store <https://gegelvshop.etsy.com>, if You dont want to DIY it :) or want to finance future projects.

PARTS LIST. (about 8-11Euros)


- ESP32 or ESP32U (*THE BRAIN*),
- 1.28 inch TFT VER 1.0, 240x240 , IC:GC9A01 (*THE DISPLAY*),
- Connecting cables.

INSTSRUCTIONS. (please look at the detailed instructions PDF).


1.Connect the pins based on the pinout.

GC9A01 Screen Pin	ESP32 Pin
VCC	3.3V
GND	GND
SCL (Clock)	GPIO 18
SDA (MOSI)	GPIO 23
RES (Reset)	GPIO 4
DC (Data/Command)	GPIO 2
CS (Chip Select)	GPIO 15


2.Gently the display in to the screen housing.

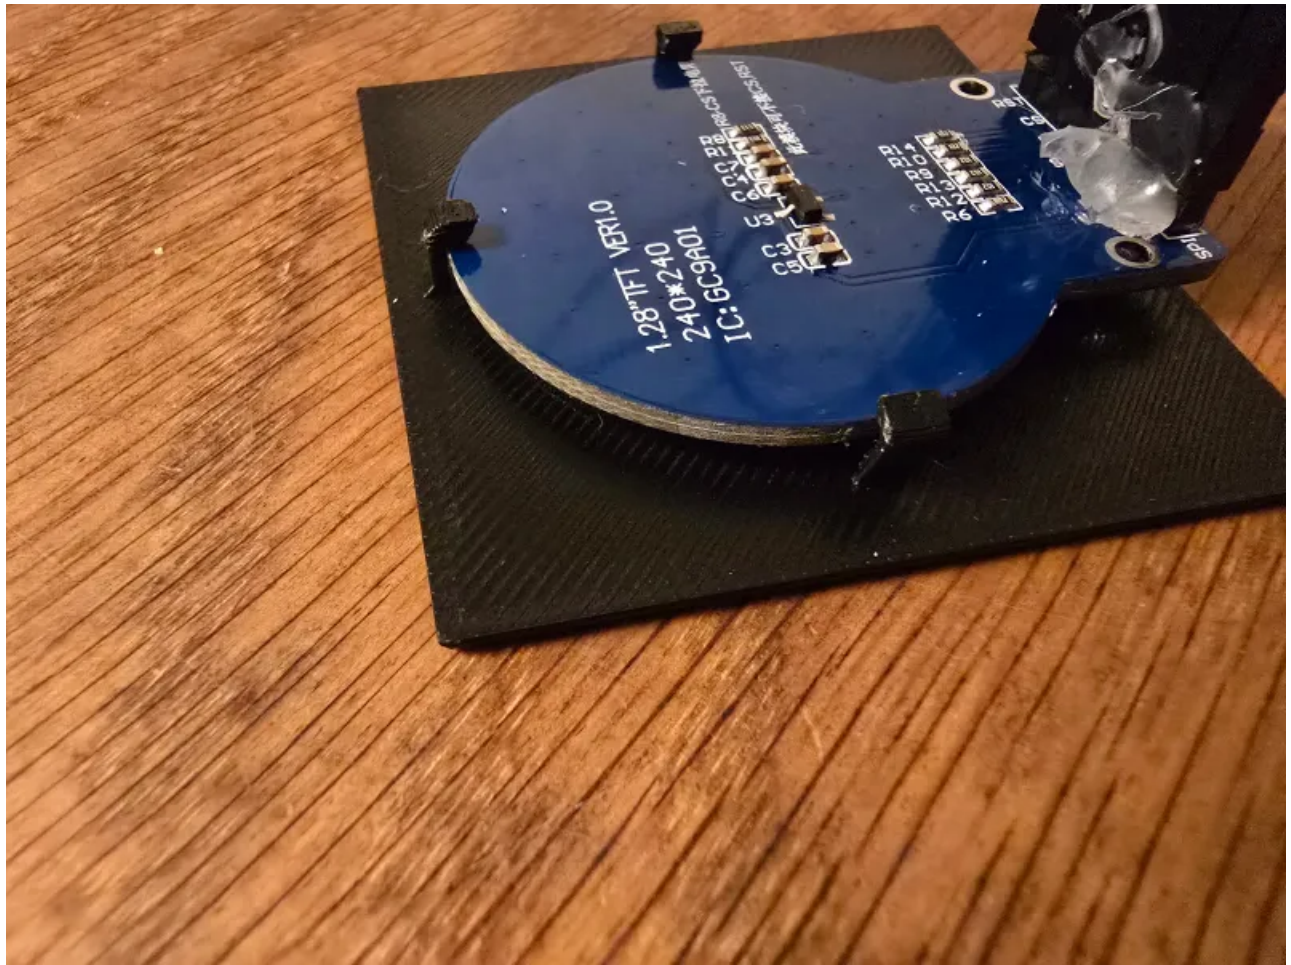

3.Slide in the entire screen with its housing, in to the radar housing.

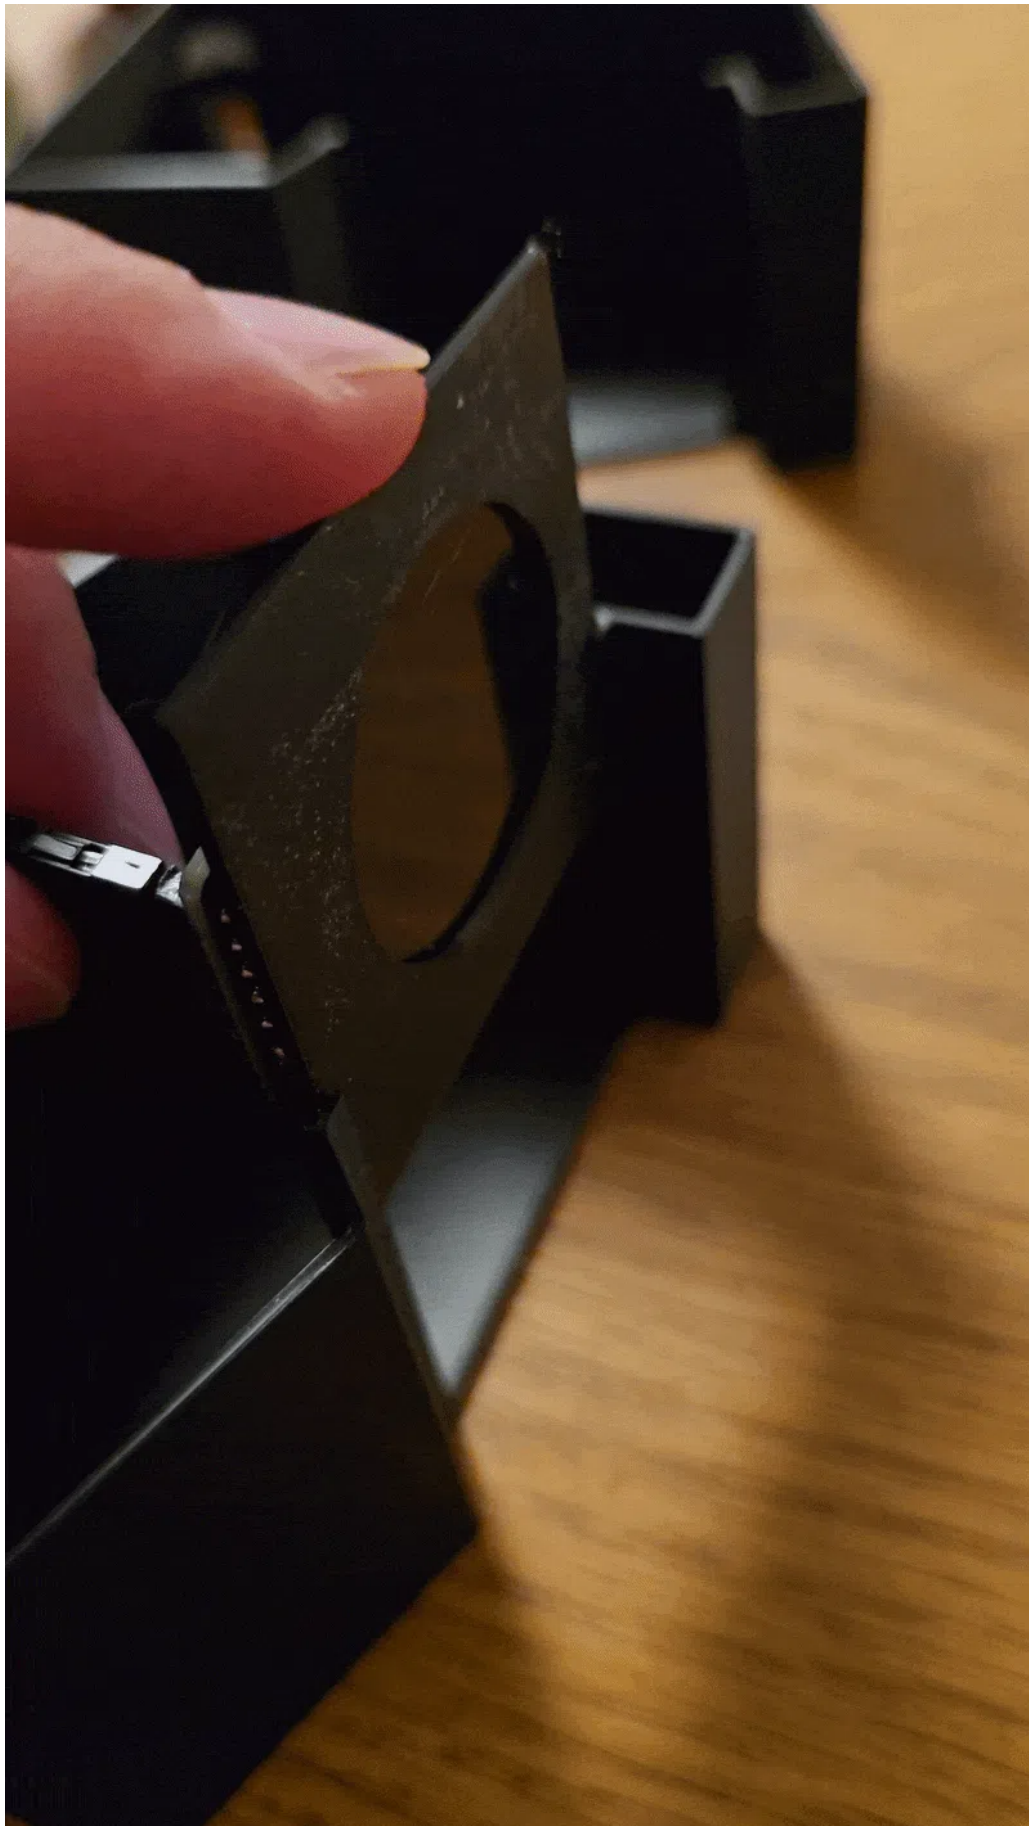

4.Slide in or angle in the ESP board (depends on your esp size), the models most easily will fit an ESP32 and ESP32U.

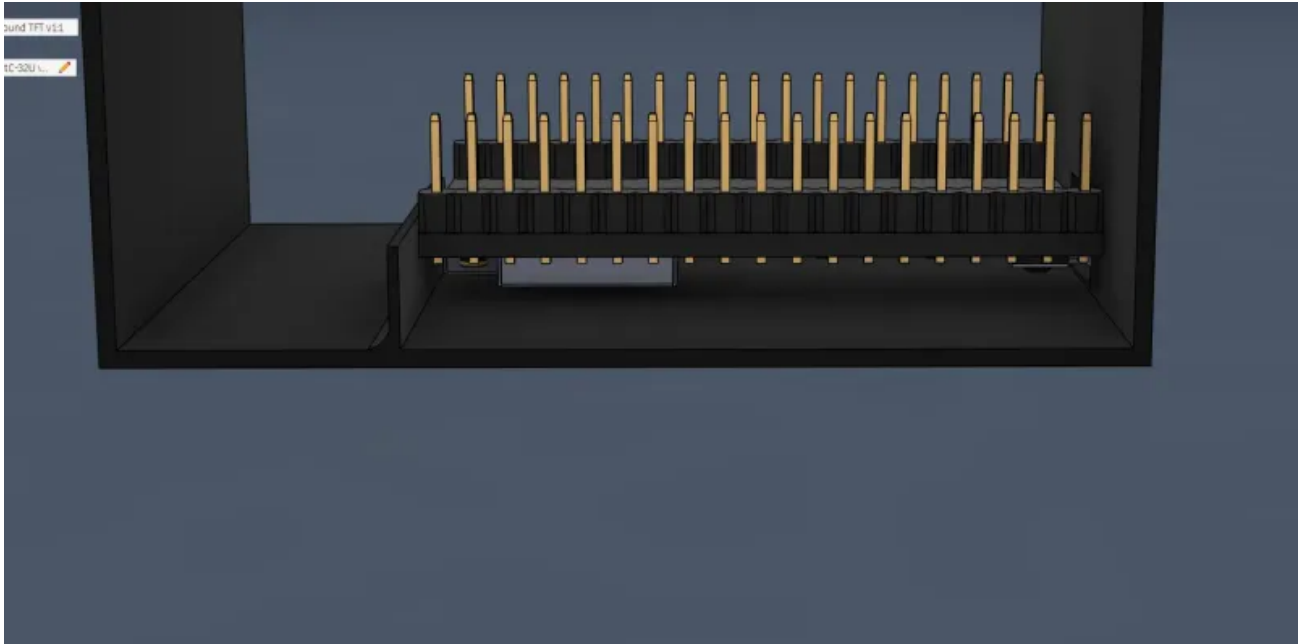

5.Make sure that the usb-C port is aligned and so are the boot and reset buttons.






6.Snap in the side (dont glue it ,before You have tested if the screen displays correctly).

7. Plug in the usb-c and upload the code via arduino Ide. (Once again, detailed information how to do that is in the PDF).

8.Connect to the devices WI-FI with your phone (the easiest).

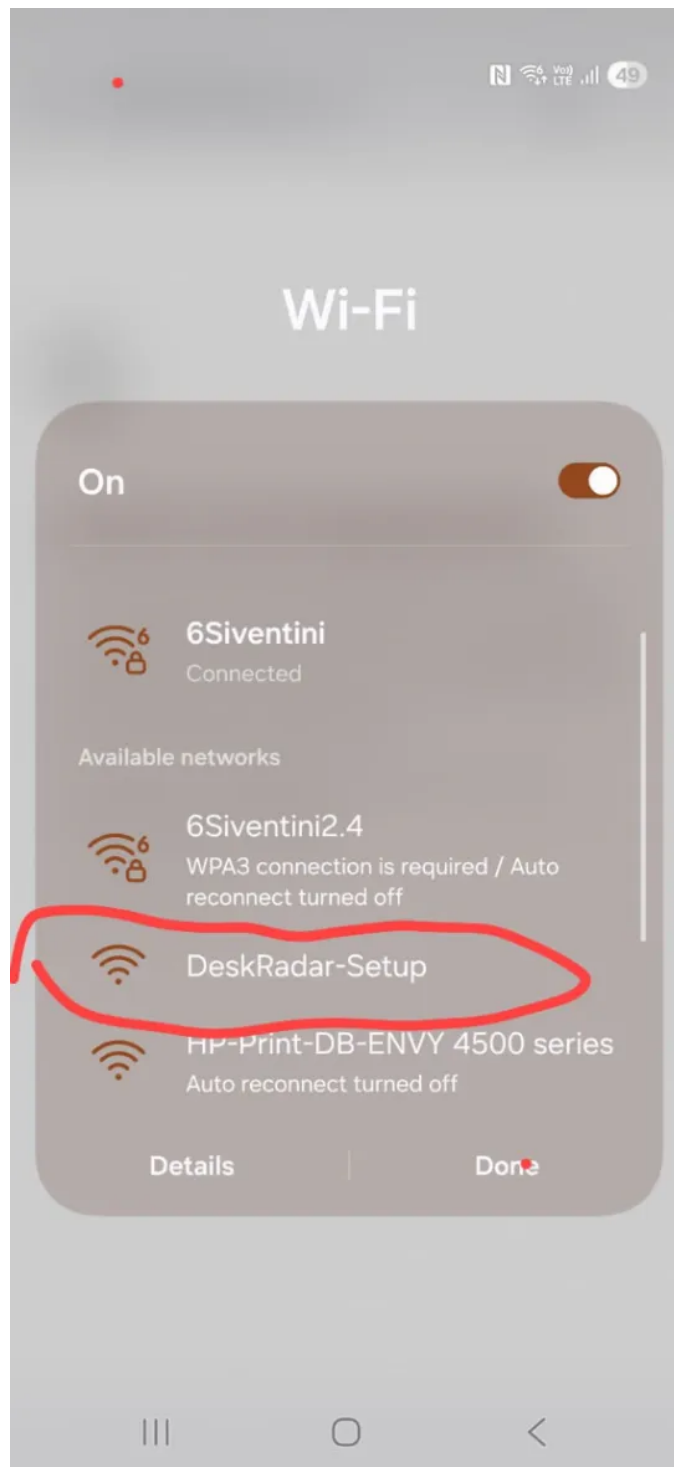

9. Once connected Type in the 192.168.4.1 in the phones Web browser (WHILST CONNECTED TO THE DEVICE).

Display should show this image:



10. Set up the Device.

16:42 48

192.168.4.1 36

Device PIN:

Select WiFi Network:

6Siventini2.4 (-51dBm)

WiFi Password:

☐ Show

Latitude:

56.9236

Longitude:

23.9711

Range (KM):

50

OpenSky Email (Optional):

Secret Key:

☐ Show

SAVE & REBOOT



11. Enjoy Your Desk radar.

F.A.Q.

- **Can other controllers be used?**
 - *Yes, but it might not have a snug fit and the boot button holes might not align.*
- **Can other displays be used?**
 - *Yes, but the code and housing display mounts are suited specially for this display, however we have tried different displays too, and it works. It depends on the model, the sizes and other parameters.*
- **What is the default refresh rate?**
 - *Currently for guest user it is 20 seconds, for Registered free user, it is 10 seconds.*
- **Is it easy to edit wifi and other settings?**
 - *Yes, the settings page is easy to use and allows to customize it in few minutes.*
- **My device says authenticating, but nothing else happens.**
 - *Most likely there is mistake in the credentials form opensky user, it is case sensitive and some phones automatically start the word with the large letter. Or just try guest user (leave those two areas blank).*

Important, you need a free account and api key from the: <https://opensky-net-work.org/>, it is completely free, there are no trials or whatever. In this website you will get the api key you need to input the code. and it will work. If you have any questions, please check the PDF for detailed instructions.

SPECIAL THANKS.

This project has brought me some new friends, which is the biggest reward i could have hoped for. People helped and participated. With ideas, suggestions and morale boosts.

Thanks to:

In no particular order, as in my chatwindow.

Bart from Netherlands,

Brian from USA or Canada,

Ronan from France,

avolagus (he did the entire Instructionsn PDF),

Rick from USA,

Jamie from Netherlands and many others.

Tags

diy

gadget

esp32

screen

lcd

Model origin

The author marked this model as their own original creation.

License ©

This work is licensed under a
Creative Commons (4.0 International License)
Attribution—Noncommercial—Share Alike



-
- ✗ | Sharing without ATTRIBUTION
 - ✓ | Remix Culture allowed
 - ✗ | Commercial Use
 - ✗ | Free Cultural Works

Related models

View more



Desk Radar Screen

 6








vase v9



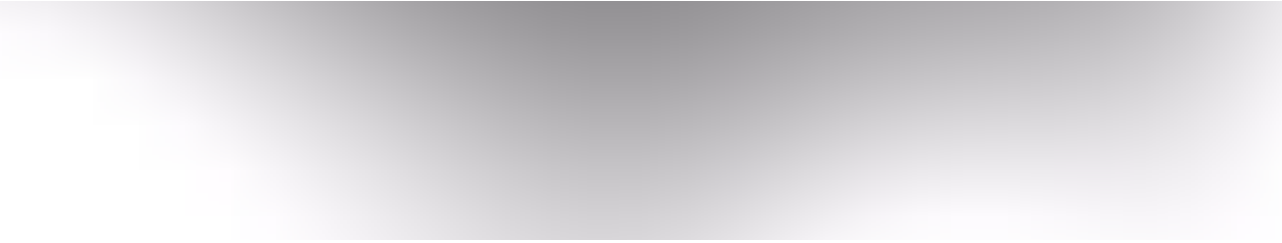

Schlüsselschale v9



Dragon Radar



