

# Observing Jovian Decametric Radio Emissions with a Software Defined Radio Telescope

David Kirwan, Alan Davy\*, and John Ronan\*

Waterford Institute of Technology,  
Dept of Maths and Physics,  
Cork Rd, Waterford City, Ireland  
[dkirwan@tssg.org](mailto:dkirwan@tssg.org)  
<http://www.wit.ie>

---

\* Supervisors

## Table of Contents

Thesis Proposal.....	1
<i>D. Kirwan</i>	
List of Tables.....	3
<b>Introduction.....</b>	<b>4</b>
<b>Research Topic.....</b>	<b>7</b>
<b>Research Problem.....</b>	<b>10</b>
Problem Summary.....	12
<b>Research Questions.....</b>	<b>12</b>
<b>Research Hypothesis.....</b>	<b>13</b>
Potential Pitfalls.....	15
Special Resources Required.....	16
<b>Preliminary Literature Review.....</b>	<b>17</b>
Decametric Radio Emission what are they and where do they come from?	17
Radio Telescope Designs, Which to Choose?.....	17
<b>Contribution to Research Knowledge Anticipated.....</b>	<b>19</b>
<b>Main Milestones Anticipated.....</b>	<b>20</b>
<b>Glossary.....</b>	<b>21</b>
<b>Bibliography.....</b>	<b>22</b>
<b>Appendices.....</b>	<b>23</b>

List of Tables

1	Most common types of DAM Emissions from Jupiter [Wilkinson and Kennewell, 1994] .....	9
2	Literature Review Synthesis Matrix .....	18
3	Milestones Anticipated .....	20

## Introduction

It was discovered in 1954 by Burke and Franklin [1955] that the planet Jupiter emits radio transmissions in the decameter (DAM) range *10-100 m wavelengths*, and the inner Jovian satellite Io appeared to have an effect on these emissions occurring [Belcher, 1987]. Jupiter's radio emissions range between 4 MHz to 40 MHz while emitting most strongly at 8 MHz [Wilkinson and Kennewell, 1994]. Due to interference from human short wave radio sources between 4-15 MHz coupled with the attenuation of these signals below 8 MHz or the refraction off Earth's ionosphere, the majority of emissions have been observed up in the 15-25 MHz range where this interference is less [Wilkinson and Kennewell, 1994]. The emission signal strength quickly diminishes above this range for ground based listening sites [Wilkinson and Kennewell, 1994].

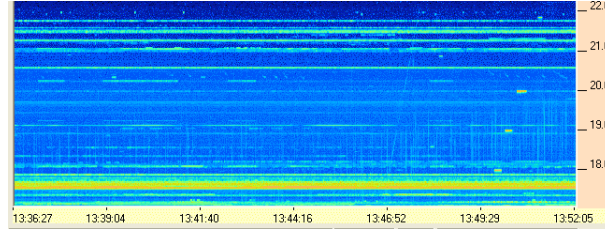


Fig. 1: Decametric Radio Emissions [Ashcraft, 2013]

Data collected by the two Voyager spacecraft in 1979 [Belcher, 1987] and the later Galileo mission in 1995 [Kivelson et al., 1996] added hugely to the understanding of the plasma interactions between Jupiter and Io and the source of the DAM emissions. It was discovered that the Io has a thin atmosphere made up of a number of neutral gasses namely sodium, potassium, sulfur, and oxygen as shown in fig: 2. It is generally thought these gasses have been emitted through volcanic activity on the surface of the moon [Belcher, 1987]. The gasses in orbit of Io have a very short life time, due to collisions with magnetospheric electrons. This gives rise to a plasma torus (IPT) which corotates with Jupiter itself [Belcher, 1987]. This can also be seen in fig: 2 which shows the IPT.

The local corotation speed of the plasma torus is faster than the Keplerian orbit of the moon, and the plasma overtakes Io in its orbit at  $57 \text{ km s}^{-1}$  [Belcher, 1987]. Fig 3 details a diagram of the Io Flux Tube (IFT) which is a tube made up from Jovian of magnetic field lines [Belcher, 1987] which thread the satellite.

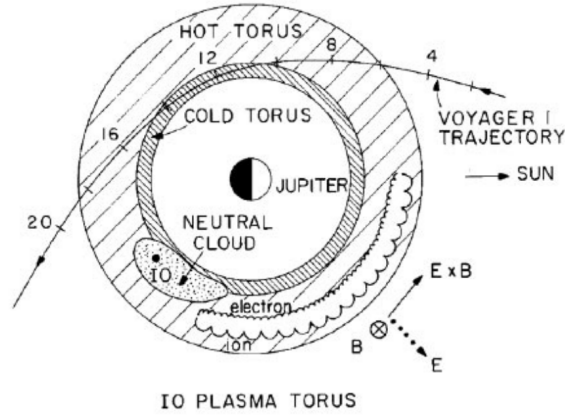


Fig. 2: Neutral Gasses in Orbit of Io [Belcher, 1987]

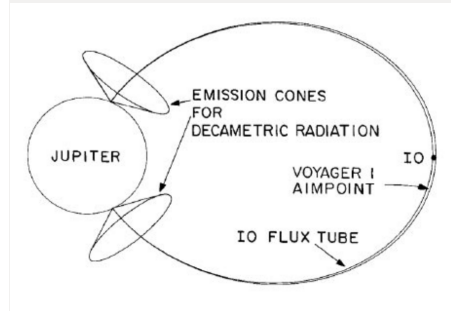


Fig. 3: Magnetic Flux Tube linking Jupiter and its satellite Io [Belcher, 1987]

A large portion of the decametric emissions come from the area where the IFT meets the Jovian ionosphere.

As Io orbits within this flux torus it acts as a unipolar conductor [Bose et al., 2008], and Alfvén waves are regularly produced which carry an electric charge along the magnetic field lines between Jupiter and Io [Bose et al., 2008]. These Alfvén waves reflect off Jupiter's ionosphere at both north and south poles upto 9 times [Bose et al., 2008] while following Io through its orbit, thereby acting as a standing wave. It appears the source of the DAM emissions are largely due to these reflections of the Alfvén waves off Jupiter's ionosphere in both the northern and southern regions.

The DAM emissions are carried along the surface of the emission cones as show in fig: 3 [Belcher, 1987]. When Io is at specific points in its orbit of Jupiter,

emissions are released at the surface of this cone. When pointing in Earth's direction, it can be picked up at ground based radio telescope listening stations.

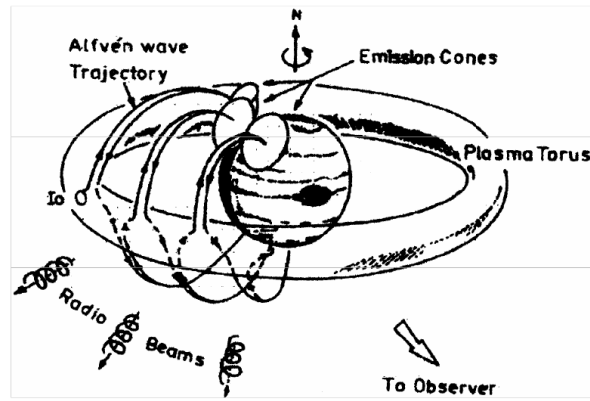


Fig. 4: DAM Emissions from Jupiter [Bose et al., 2008]

## Research Topic

A ground based listening station aiming to record DAM emissions from Jupiter is most likely to succeed between 15-25 MHz [Wilkinson and Kennewell, 1994]. The *shortwave radio* bands extend from 2.3 MHz (120 m) all the way to 26.1 MHz (11 m) and were approved for broadcast at the 1997 World Radio communication Conference (WRC). ComReg, is the Irish Commission for Communications Regulation within Ireland, and maintains a list of the short wave frequencies which are designated for transmission in Ireland and can be seen in fig: 5 [Comreg, 2014].

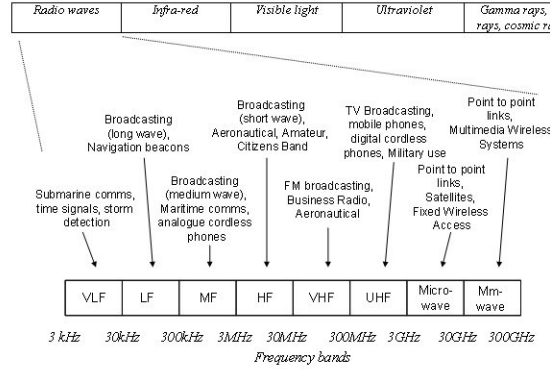


Fig. 5: Irish Regulatory Transmission Ranges [Comreg, 2014]

As many commercial shortwave radio stations transmit in the lower end of the high frequency (HF) 3-7 MHz range, it can be extremely busy and potentially difficult to monitor DAM emissions where they are strongest. Amateur radio operators also operate frequently in mid-late HF ranges while the higher frequency DAM emissions taper off in strength very quickly. This limits the potential listening range significantly. Despite these obstacles, there are sections of the HF spectrum which are suitable to capture Jovian emissions. The a suitable frequency to monitor Jovian DAM emissions which is recommended by the Radio Jove project is *20.1 MHz* [NASA, 2012b].

Sourcing a suitable antenna is one of the first requirements to satisfy in order to capture DAM emissions. Antennas generally are best suited to collect electromagnetic radiation at single specific frequencies, but may resonate and therefore operate over a range of frequencies depending on the design [NASA, 2012b].

The wavelength ( $\lambda$ ) which corresponds with the frequency ( $f$ )  $20.1\text{ MHz}$  can be obtained using the wavelength equation as shown in fig 6. The corresponding wavelength for the frequency  $20.1\text{ MHz}$  works out to be  $14.925\text{ m}$  using this equation.

$$\lambda = \frac{c}{f} \quad (1)$$

$$\lambda = \frac{3 \times 10^8 \text{ m/s}}{20.1 \times 10^6 \text{ Hz}} = 14.925373134328359 \text{ m} \quad (2)$$

Fig. 6: Wavelength Equation

One simple antenna design for collecting DAM emissions is the *dipole*. A dipole antenna can be constructed simply and cheaply from two pieces of wire and three insulators [NASA, 2012b], while ensuring to cut the wires to a length matching half the desired wavelength being captured [NASA, 2012b]. However as the formula referenced in fig: 6 describes the use of an *infinitely thin* wire which is not possible in reality, *capacitive end effects* must be taken into account when working out the resonating wavelength for a dipole antenna [NASA, 2012b].

The formula for calculating the resonating frequency for a half wavelength dipole is described in fig 7 and produces the value which should measure from tip to tip on the wires used to construct the dipole antenna [NASA, 2012b].

$$\left(\frac{\lambda}{2}\right) \text{m} = \frac{142.65}{20.1 \text{ MHz}} = 7.097014925373134 \text{ m} \quad (3)$$

Fig. 7: Wavelength Equation for Real World Half Wavelength Dipole Antenna

The radio emissions come in several different forms each with slightly different characteristics. Table: 1 shows a list of the more widely known types which can be picked up using ground based listening equipment, and also has some information about their different characteristics [Wilkinson and Kennewell, 1994]. Any particular observation session might be made up of some or all of these dif-



ferent types of DAM emission and can last from a few minutes to several hours for larger noise storms [Wilkinson and Kennewell, 1994].

Type	Emission Length	Emission Description
S-Bursts	short generally 1-10 milliseconds	wideband bursts, several MHz wide
L-Bursts	long 0.5 - 5 seconds	wideband bursts, several MHz wide
N-Bursts	milliseconds upto seconds	narrowband bursts, several kHz wide

Table 1: Most common types of DAM Emissions from Jupiter [Wilkinson and Kennewell, 1994]

Fig. 8 shows an ideal case of the *S-Burst* and *L-Burst* DAM emissions and what they might look like on a frequency spectrum graph. S-Burst emissions are short, generally  $1 - 10 \times 10^{-3}s$  long while L-Bursts can be  $0.5-5s$  in length.

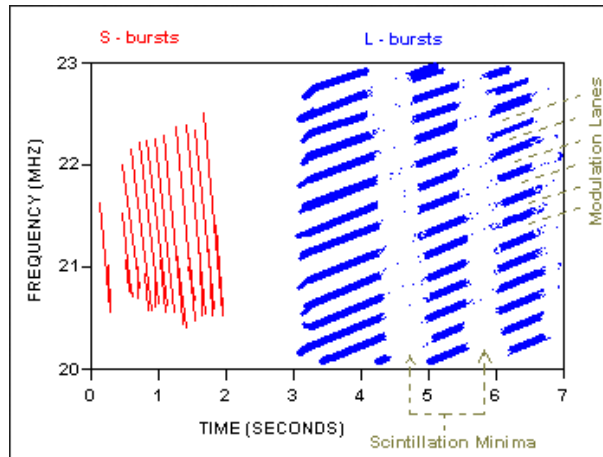


Fig. 8: Ideal DAM Emissions types from Jupiter [Wilkinson and Kennewell, 1994]

## Research Problem

The aim of this project is to design and construct a low cost, self sufficient software defined radio (SDR) telescope listening station, which can capture signals for transmission to a central data aggregation point for signal processing and analysis. This telescope should be suitable to study signals in the DAM (10-100 m) band at or near the  $20.1\text{ MHz}$  frequency in order to pick up emissions produced by either Jupiter or the Sun.

There are a number of challenges which need to be overcome to achieve this, such as Jupiter only being visible for a number of months each year and then generally in the evening, night, or morning hours. Often at highly unsociable times. For this reason a radio telescope listening site should be as automated as possible.

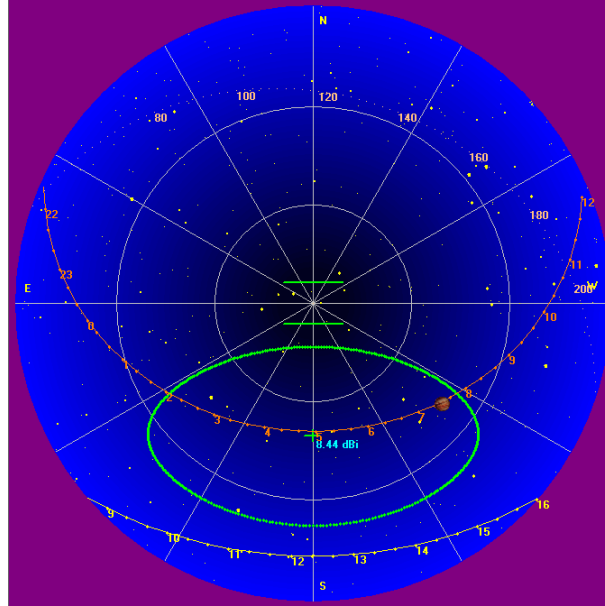


Fig. 9: Dual Dipole Antenna Beam at 20FT and 135deg phasing S [NASA, 2012b]

During daylight hours, the ionosphere becomes opaque to signals in the DAM band due to becoming ionised by solar radiation [NASA, 2012a]. The proposed system will have a short window in the order of 1-6 hours every second night and early morning or so during which it may be possible to capture DAM emissions

from Jupiter. The Sun is a source of DAM emissions also, and the telescope can capture solar storm emissions without modification, providing the Sun passes through the antenna beam. The telescope may require manual reconfiguration in order to pick up solar storm emissions during the day.

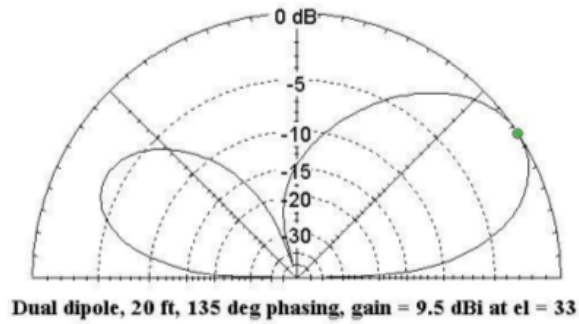


Fig. 10: Dual Dipole Antenna Array Beam[NASA, 2012b]

Interference from human sources such as shortwave radio stations or amateur radio operators are also likely to affect the collection of DAM emissions from Jupiter. The ability for automated flagging or removal of interference would be a desirable feature of the system. Lightning storms can also produce interference which will affect observations, it might be desirable for the system to handle natural interference sources also.

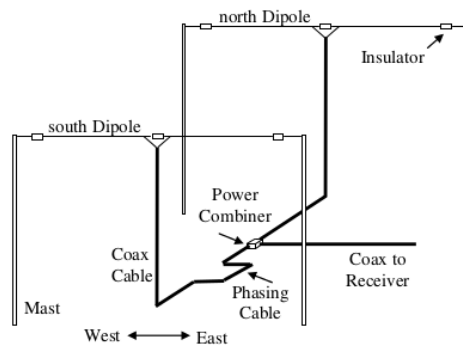


Fig. 11: Dual Dipole Antenna Array [NASA, 2012b]

### Problem Summary

To summarise the problem briefly:

- Design of a low cost self sufficient SDR telescope platform suitable for amateur observers
- Capable of studying Jupiter in the decametric band 3MHz - 40MHz (10-100 m)
- This band is chosen because Earths atmosphere is transparent at these frequencies during the night time
- Another reason is emissions near 20Mhz, are least likely to be interfered with from human short wave sources
- Such a platform has a second capability in that it is also be capable of studying Solar emissions during the day as solar emissions are strong enough to penetrate the ionosphere during the day
- Development of a backhaul system for processing and storage of listening site captured data, thereby making it capable of aggregating data from multiple listening sites
- Develop an API for accessing this data, and allow integrating into 3rd party applications
- Amateur listening sites can compliment larger telescope arrays around the world

### Research Questions

The initial research questions which arise are as follows:

- What current Internet of Things (IOT) technologies would best suit the development of a fully automated software defined radio signal listening station and how cheaply can it be created?
- Can a software defined radio solution be developed to filter or flag known instances of human radio interference from radio signal observations?
- If so can this same solution be used to filter or flag known instances of natural radio interference such as lightning?
- Can a software defined radio solution be developed to flag possible instances of the three main DAM emission types detailed in 1?

## Research Hypothesis

The section aims to document the different methodologies which will be followed on this project and is broke up into the following:

### Antenna Build

Building the antenna is further broken down into the following steps:

- source materials to build a dual dipole antenna
- build the telescope antenna
- validate the antenna is capable of collecting signals at or near the 20.1 MHz frequency

### Analysis of Listening Site Suitability

Finding a site suitable to deploy the antenna will require a site survey with the antenna connected to a spectrum analyser.

- source a spectrum analyser suitable for performing a site survey
- perform the survey at this site
- repeat until suitable site is found
- deploy the antenna at a site

### Data Collection

Jupiter is visible above the horizon at night only during certain periods see fig: 10. In order to perform the required data collection it is highly desirable to automate the process.

- create listening schedule during which DAM emissions are likely to occur
- develop SDR prototype mechanism for gathering raw data from the antenna
- develop software scheduling system which to activate the collection of data from the antenna remotely

### Data Analysis

Collected data can be analysed manually at first in order to validate the testbed, but later using software such as the development of basic algorithms to spot events such as *S-Bursts* occurring in the data.

- analyse data collected for evidence of Jovian or Solar DAM emissions
- analyse data for evidence of interference from human sources
- analyse data for evidence of interference from natural sources

- develop a system which connects to the dxspider server and creates flag events for human identified emissions at or near the target frequency being monitored by the telescope
- develop a system which interacts with the Blitzortung servers and creates flag events for emissions generated by lightning

### Data Processing

SDR data processing techniques can be developed in order to better filter the signals as they are being collected thereby minimising the level of processing at a later stage.

- using SDR techniques, to reduce interference in data as it is being collected
- attempt to remove instances of human and natural interference using signal processing techniques after collection

### Data Aggregation

An API layer allows 3rd parties the ability to access data collected from multiple listening sites and potentially develop new features or systems using the data.

- develop API layer to allow external parties access aggregated data collected by the system

### Design Platform

An analysis of the current available IOT technologies and some of the available options which could be used in order to produce an open low cost platform which amateur astronomers could use in order to study emissions in the DAM band.

- design a self sufficient automated platform suitable for collection of signals such as those by the SDR telescope

The SDR hardware transceiver used is likely to be the *HackRF* system while the SDR software components will be developed in either *C++* or *Python* as both languages have bindings for the *GNURadio* development toolkit [Gnuradio, 2014]. The backend aggregation system with API will most likely be developed in the *Ruby* language as this language is highly expressive and suitable for rapid prototype development. Execution of the Ruby application on the Java VM is

capable using the *JRuby* system, which will also allow the incorporation of any required Java libraries.

### Potential Pitfalls

It is difficult to determine at this early stage what will ultimately prove to be the most troublesome element to implement, however there are a number of potential pitfalls which have already been identified.

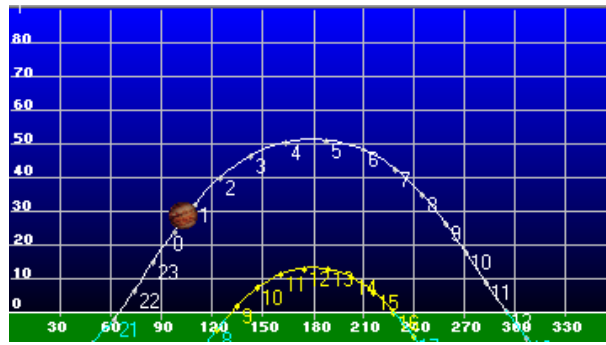


Fig. 12: Radio Jove Graph Showing Jupiters Max Altitude 2014

The latitude of Ireland is  $53.3^\circ$  degrees N. In Ireland Jupiter reaches a maximum altitude of  $52^\circ$  degrees in 2014 see fig: 12. The telescope configuration which will be documented will apply only to locations at this or a similar latitude. It will be universally applicable at this latitude without modification throughout the world, and with relatively minor modifications to the configuration of the antenna it can be used at all locations. NASA [2012b]

The SDR complexity of the solution required in order to correctly filter interference might ultimately prove too resource intensive to work with a low power system such as the *Raspberry Pi* or *Beaglebone Black*. It might become apparent that the minimum system requirements may need to be increased to an *Intel Atom* powered Netbook for example, or potentially something a lot more powerful such as an *i3* or *i5* system. If this was the case, it will drastically increase the power and cost requirements of the system should it be self sufficient, requiring bigger batteries, more capable/expensive photovoltaic and or wind turbines to keep the system topped up.

### **Special Resources Required**

The initial resources which have been identified to be required are listed as follows:

#### **RG59 Coax**

RG59 coax cable is required to link the dipole antennas back to the SDR transceiver.

#### **PL259 / SO239**

Cable adapters which connect coax cables together with the dipole centers.

#### **HackRF**

The HackRF SDR transceiver system is the software defined radio transceiver chosen for the prototype system.

#### **Radio Jove**

The Radio Jove software is extremely useful for observers wishing to capture DAM emissions from Jupiter. It contains a large number of features such as emission prediction observation charts, and information regarding Jupiters location in the sky from any specified point on the Earths surface.

#### **Spectrum Analyser**

A spectrum analyser will be required in order to perform a site survey to determine if a location is suitable for collecting DAM emissions.



## Preliminary Literature Review

The preliminary literature review can be broken down into the following areas:

- What are the decametric radio emissions and what are they caused by
- Potential radio telescope designs which could be replicated in order to collect DAM emissions
- Digital signal processing and filtering to remove interference

### Decametric Radio Emission what are they and where do they come from?

Belcher [1987] states that the data collected by the *Voyager* spacecraft fits with the Alfvén wing theory as an explanation for the source of the DAM emissions [Belcher, 1987]. Kivelson et al. [1996] discusses the refinements made to this theory to take into account the flowing plasma between Jupiters ionosphere and the electrically conducting Io. The *Galileo* spacecraft collected data which appears to corroborate the updates to the Alfvén wing model [Kivelson et al., 1996]. Bose et al. [2008] states that the Alfvén waves reflect off Jupiters ionosphere which cause the DAM emissions to radiate out from the point in Jupiters ionosphere where it meets the IFT, in a cone shape. Imai et al. [2008] proposes an update to this model to take into account the decade long shifts in DAM emission patterns, and proposes an extension to the emission cone model to include a *searchlight* shaped emission zone [Imai et al., 2008] see fig: 13.

### Radio Telescope Designs, Which to Choose?

The NASA project *Radio Jove* recommended the dual dipole array design for a cheap low cost listening site as shown in fig: 11 [NASA, 2012b]. But it is by no means the only antenna design which would be capable of picking up the DAM emissions. Wilkinson and Kennewell [1994] recommends a slightly more advanced design, the *folded dipole* which maximises the bandwidth available to the antenna [Wilkinson and Kennewell, 1994].

Topic	Belcher 1987	Kivelson et al 1996	Bose et al 2008	Imai et al 2008
What are the Jovian DAM emissions and what causes them?	Large fraction of DAM emissions come from point where IFT meets Jupiters ionosphere (p3). Large moving conductor within a magnetised plasma (p1) produces Alfvén wing.	Alfvénic disturbances, generated by flowing plasma from Jovian magnetosphere and conducting Io (p337).	Alfvén waves reflecting off Jupiters Ionosphere (p79).	Not fully understood, but believed to be produced by cyclotron maser instability [Imai et al., 2008].
Topic	Wilkinson et al	NASA Radio Jove		
Radio telescope designs suitable to capture DAM emissions from Jupiter	Wilkinson et al suggest a folded dipole antenna design	Radio Jove project suggest a dual dipole antenna		
Topic	Bruce 1970	GNU Radio 2014		
Digital signal processing				

Table 2: Literature Review Synthesis Matrix

## **Contribution to Research Knowledge Anticipated**

The contributions to research knowledge which are anticipated are listed as follows:

1. A low cost and scalable radio telescope listening platform design which Amateur astronomers can use to collaborate on radio astronomical research.
2. A rudimentary SDR solution to filter or flag human and natural radio interference from observations.
3. An SDR solution to flag possible Jovian or Solar radio emissions such as those listed in table: 1.

## Main Milestones Anticipated

The following table: 3 details the milestones which have been identified and agreed to date:

Deadline	Start	End	Summary
Antenna Build	October 14	December 14	Settle on a design for the telescope, source the parts for the build and finally construct the prototype antenna which will act as a template for the second dipole.
Site Survey	January 15	January 15	Perform a site survey using a spectrum analyser connected to the prototype antenna.
Deploy Dual Dipole Antenna	January 15	January 15	Deploy the antenna array at a suitable location and begin to collect data for analysis.
Interim Report	January 15	24th April 15	Interim Report presentation to review panel and supervisor on 29th April
Data Collection	January 15	June 15	Once the antenna is deployed begin collecting data for analysis.
Data Analysis	January 15	June 15	Develop analytical SDR tools to filter or flag interference. Develop algorithms to detect the various DAM emission.
Evaluate IOT Technologies	January 15	June 15	Experiment with the various IOT technologies which could potentially be used to create a self sufficient listening array.
Final Report Submission	June 15	September 15	First draft to supervisor due in early June 15. Complete draft due 24th August. Final submission 4th September

Table 3: Milestones Anticipated

## Glossary

**DAM** decameter radio emissions. 4, 5, 7–14, 16, 17

**HF** High Frequency. 7

**IFT** Io Flux Tube. 4, 5, 17

**IOT** Internet of Things. 12, 14

**IPT** Io Plasma Torus. 4

**SDR** Software Defined Radio. 10, 13–16, 19

**WRC** World Radiocommunication Conference. 7

## Bibliography

- Thomas Ashcraft. Jupiter 27 september 2013 n event, September 2013. URL [http://www.heliotown.com/Jupiter\\_Sep272013\\_N\\_Event.html](http://www.heliotown.com/Jupiter_Sep272013_N_Event.html).
- John W. Belcher. The jupiter-io connection: An alfvén engine in space. *Science*, 238(Oct 9):170–176, 1987.
- S. K. Bose, S. Sarkar, and A. B. Bhattacharyya. Jovian decametric radio emission: An overview of the planetary radio astronomical observations. *Indian Journal of Radio and Space Physics*, 37:77–108, 2008.
- F.B. Burke and L. K. Franklin. Observations of variable radio source associated with the planet jupiter. *Journal of Geophysical Research*, 60(213), 1955.
- Comreg. *Overview Comreg - Radio Spectrum*. Commission for Communications Regulation, 2014. URL [http://www.comreg.ie/radio\\_spectrum/overview.496.html](http://www.comreg.ie/radio_spectrum/overview.496.html).
- Gnuradio. Tutorials - gnuradio, 2014. URL <http://gnuradio.org/redmine/projects/gnuradio/wiki/Tutorials>.
- K. Imai, L. Garcia, F. Reyes, M. Imai, J. R. Thieman, and M. Ikuta. A Searchlight Beam Model of Jupiter’s Decametric Radio Emissions. *AGU Fall Meeting Abstracts*, page B1673, December 2008.
- M. G. Kivelson, K. K. Khurana, R. J. Walker, C. T. Russell, J. A. Linker, D. J. Southwood, and C. Polanskey. A magnetic signature at io: Initial report from the galileo magnetometer. *Science*, 273, July 1996.
- NASA. *The Effects of Earth’s Upper Atmosphere on Radio Signals*, 2012a. URL <http://radiojove.gsfc.nasa.gov/education/educ/radio/tran-rec/exerc/iono.htm>.
- NASA. *Antenna Kit and Manual Developed for NASA Radio JOVE Project by The Radio JOVE Project Team*, 2012b. URL [http://radiojove.gsfc.nasa.gov/telescope/ant\\_manual.pdf](http://radiojove.gsfc.nasa.gov/telescope/ant_manual.pdf).
- M. Wilkinson and J. Kennewell. A project to detect radio emissions from jupiter. *Southern Sky*, 1994. URL [http://www.amazon.co.uk/gp/product/B002MPWS4?psc=1&redirect=true&ref\\_=oh\\_aui\\_detailpage\\_o00\\_s00](http://www.amazon.co.uk/gp/product/B002MPWS4?psc=1&redirect=true&ref_=oh_aui_detailpage_o00_s00).

## Appendix

### How I became inspired

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Praesent ut egestas sapien. Sed vehicula, libero vitae ornare interdum, nunc felis rhoncus risus, ut lobortis quam ligula sed nunc. Suspendisse potenti. Proin lacinia ex dui, eu maximus justo consequat porttitor. Pellentesque sollicitudin rutrum ex hendrerit vestibulum. Etiam luctus leo vitae magna sagittis feugiat a vitae ligula. Maecenas suscipit interdum tincidunt. Etiam a sapien elit. Nam dictum sed felis non commodo.

### Images

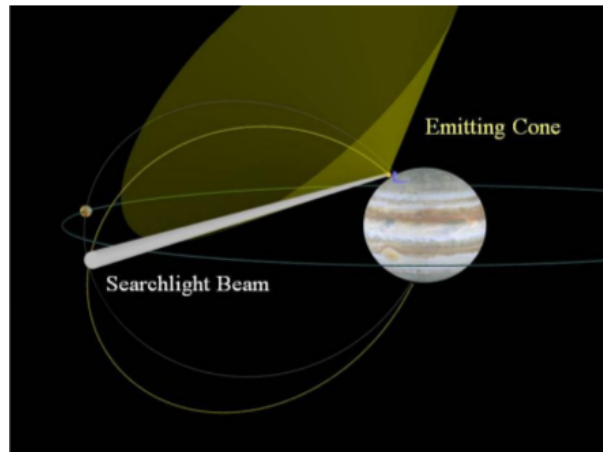


Fig. 13: A searchlight beam model of Jupiters decametric radio emissions [Imai et al., 2008]