

Specifications

- **Load Rating:** up to 35 kg per pair
- **Slide Extension:** 100 %
- **Slide Height:** 45.5 mm
- **Slide Thickness:** 12.7 mm
- **Side space for installation between the cabinet and the drawer:** Rail thickness 12.7 mm +0.2 mm to +0.5 mm
- **Maximum Slide Length:** 700 mm
- **Temperature Range:** -20 °C to 70 °C
- **Permitted Mounting Orientations:** vertical mount
- **Other Mounting Orientations:** Not suitable for flat mounting

Eigenschaften

- **Lastwert:** bis 35 kg pro Paar
- **Auszug der Schiene:** 100 %
- **Schienenhöhe:** 45,5 mm
- **Schienenendicke:** 12,7 mm
- **Einbaubreite zwischen Korpus und Schub:** Schienenendicke 12,7 mm +0,2 mm bis +0,5 mm
- **Maximale Schienenlänge:** 700 mm
- **Temperaturbereich:** -20 °C bis 70 °C
- **Mögliche Montageweise:** vertikal montiert
- **Andere Montageweisen:** Flachmontage nicht zulässig



Features

- Hold-in
- Front Disconnect


Funktionen

- Einhalterung
- Frontschnelltrennung



Technical Drawing

Technische Zeichnung

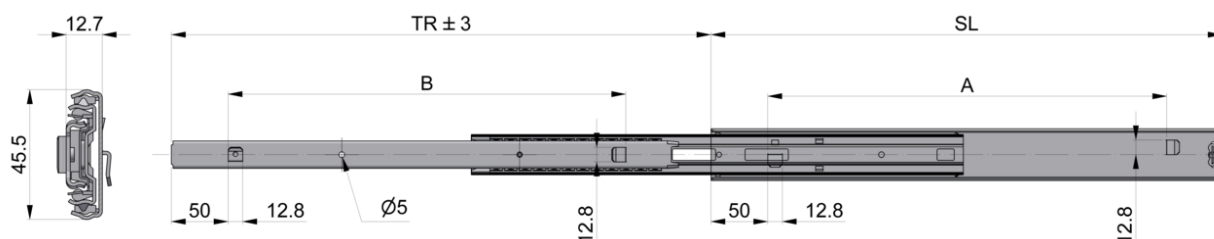

DZ4505	mm				kg	
	SL	TR	A	B	W	L1
DZ4505-0025	250	275	150	150	0.74	32
DZ4505-0030	300	325	200	200	0.89	33
DZ4505-0035	350	375	250	250	1.05	34
DZ4505-0040	400	425	300	300	1.21	35
DZ4505-0045	450	475	350	350	1.35	35
DZ4505-0050	500	525	400	400	1.51	35
DZ4505-0055	550	575	450	450	1.66	35
DZ4505-0060	600	625	500	500	1.82	33
DZ4505-0065	650	675	550	550	1.97	31
DZ4505-0070	700	725	600	600	2.13	29

W: Weight per pair of slides

L1: 80,000 cycles, 450 mm wide drawer, vertical mount

W: Gewicht pro Schienenpaar

L1: 80.000 Zyklen, 450 mm breiter Schub, vertikal montiert

Additional Information

Weitere Informationen

Material and Surface

- **Main Material:** Mild steel
- **Ball Material:** Hardened steel
- **Finish:** DZ - bright zinc finish - 12 h salt spray test

Material und Oberfläche

- **Hauptmaterial:** Unlegierter Stahl
- **Kugelmateriale:** Gehärteter Stahl
- **Oberflächenbeschichtung:** DZ - Verzinkt, hell passiviert - 12 h Salzsprühnebeltest

Fixing

- Bayonet mounting

Befestigung

- Bajonettmontage

Notes

- The slide must be loaded centrally

Hinweise

- Die Schiene muss mittig belastet werden