



Tel Aviv University
The Iby and Aladar Fleischman Faculty of Engineering

05124710 – Laboratory in FPGA
Experiment 7 – Final Report

Snake Game

Authors

Name	ID
Saleh Khalil	213310485
Mahmood Isteteh	214032682

July 6, 2026

Contents

1	Introduction	2
1.1	Game rules	2
2	Design Overview	2
2.1	High-level block diagram	2
2.2	File inventory	3
3	Top-Level Integration	3
3.1	snake_game.v – top level	3
3.2	IO modules - under snake_game.v	4
3.3	snake_game.v Testbench - snake_game_tb.v	5
4	Game Logic Block	5
4.1	snake.v – the game core	6
4.2	farmer.v – food generator	6
5	Timing Block	8
5.1	game_tick.v	8
6	Rendering Block	9
6.1	PixelPainter.v	9
6.2	grid_mapper.v	9
6.3	FA.v	10
7	Output Block	10
7.1	VGA_Interface.v	10
7.2	Seg_7_Display.v	11
8	Utilization of Previous Labs	11
9	Results	12
9.1	Final state of the game	12
9.2	Photos of the game in action	12
9.3	Working game	13
9.4	Demonstration video	13
10	Problems Encountered and Solutions	13
11	Conclusion	14

1 Introduction

In this experiment we designed and implemented a complete *Snake* game on the Digilent Basys3 board. The game is displayed on a computer monitor through the VGA interface, the current score is shown on the on-board 4-digit 7-segment display, and the player steers the snake with a PS/2 keyboard.

1.1 Game rules

The playing field is a 100×75 grid of 8×8 -pixel cells on an 800×600 VGA screen. The snake advances one cell per game tick in the current direction; eating the red food cell makes it grow by one cell and increments the score, and every food item also makes the game tick slightly faster. The game ends when the snake hits a wall or its own body, after which a game-over screen is shown and the game can be restarted by pressing any key on the keyboard.

2 Design Overview

2.1 High-level block diagram

Figure 1 shows the complete design, dataflow between the blocks and the three testbenches.

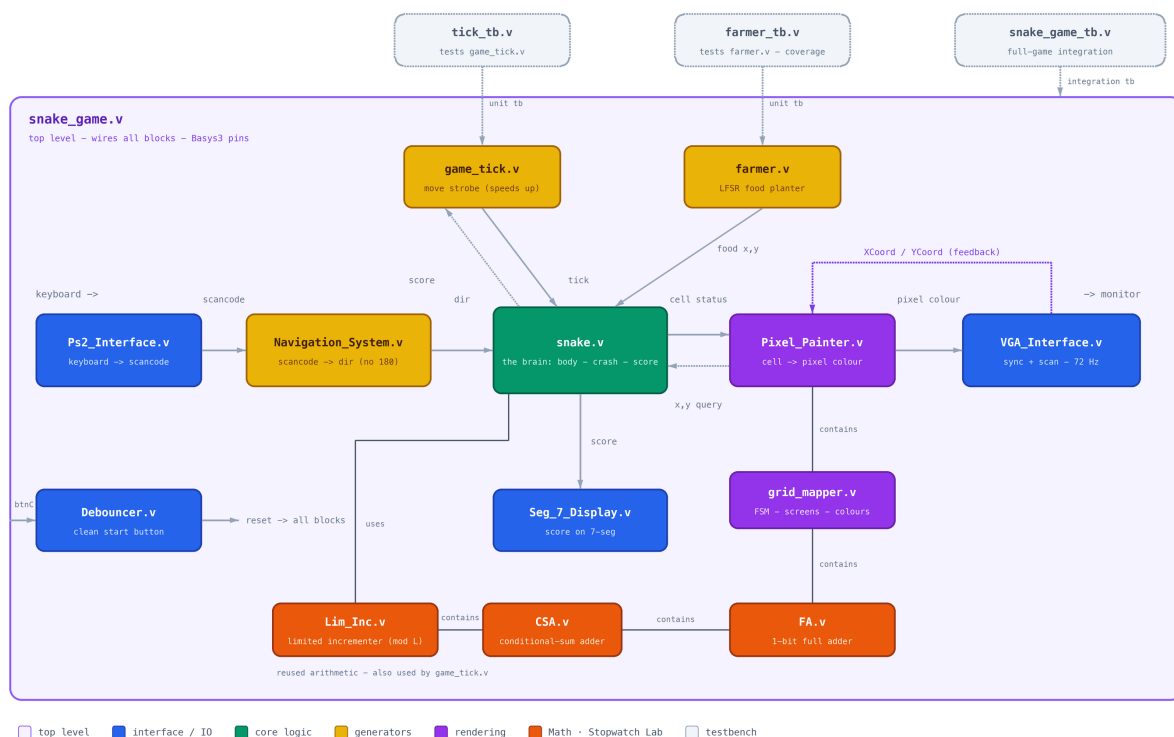


Figure 1: Full design map

2.2 File inventory

Table 1: All files and their modules

File	Module	Role	Origin
FA.v	FA	1-bit full adder	reuse (Lab 1)
CSA.v	CSA	conditional sum adder	reuse (Lab 1)
Debouncer.v	Debouncer	signal debounce	reuse (Lab 1)
Seg_7_Display.v	Seg_7_Display	score display	reuse (Lab 1)
Lim_Inc.v	Lim_Inc	limited incrementer	reuse (Lab 2)
Ps2_Interface.v	Ps2_Interface	keyboard interface	reuse (Lab 5)
VGA_Interface.v	VGA_Interface	VGA interface	reuse (Lab 6)
game_tick.v	Game_Tick	movement speed	new
snake.v	Snake	game core	new
farmer.v	farmer	food generator	new
PixelPainter.v	PixelPainter	rendering	new
grid_mapper.v	GridMapper	grid rendering	new
snake_game_tb.v	snake_game_tb	integration testbench	new
farmer_tb.v	farmer_tb	farmer testbench	new
tick_tb.v	tick_tb	dynamic tick testbench	new
Navigation_System.v	Navigation_System	direction control	new
snake_game.v	snake_game	top level	new
task3.xdc	–	Constraints	new

3 Top-Level Integration

3.1 snake_game.v – top level

Purpose. Top module file: it holds no logic of its own, only the module instantiations and the wires all modules together.

Table 2: snake_game ports

Port	Dir	Width	Description
clk	in	1	100 MHz system clock (pin W5).
rst	in	1	Centre button, active high (U18).
PS2Clk	in	1	Keyboard clock (C17).
PS2Data	in	1	Keyboard data (B17).
vgaRed/Green/Blue	out	3×4	VGA colour channels.
Hsync, Vsync	out	1	VGA synchronisation.
a_to_g, an, dp	out	7/4/1	7-segment display.

3.2 IO modules - under snake_game.v

Of the eight instantiated modules, four are dedicated to moving data on and off the board: the keyboard, the VGA monitor, the 7-segment display and the reset button. The remaining four hold the actual game logic and are covered in the next subsection.

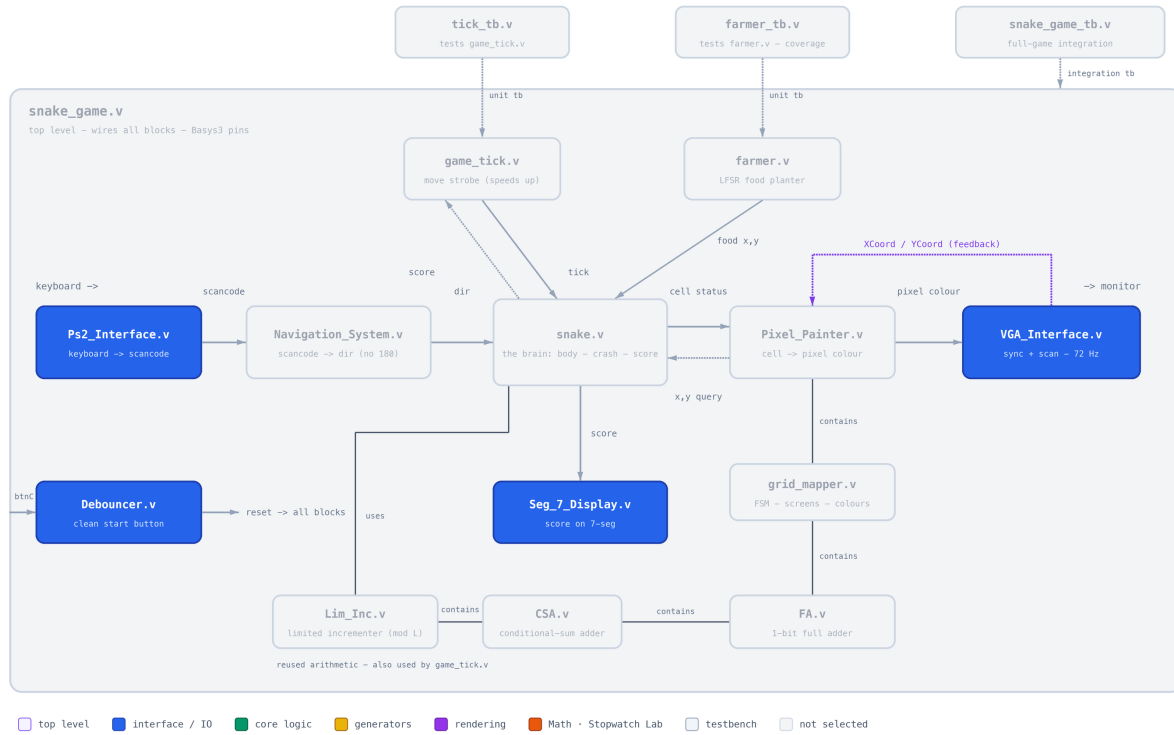


Figure 2: IO modules highlighted.

- **Ps2_Interface.v** – Receives PS/2 keyboard frames and outputs the make scancode with a single-clock `keyPressed`.
- **Debounce.v** – Converts the bouncy centre push-button into a single one-clock reset pulse.
- **VGA_Interface.v** – Generates VGA signals for 800×600 @ 72Hz display, drives the RGB pins with the color supplied by the `PixelPainter.v` module, and exports the scan coordinates.
- **Seg_7_Display.v** – Shows the 2-digit score supplied by the `Snake.v` module on the 7-segment display.

3.3 snake_game.v Testbench - snake_game_tb.v

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Annotated waveform of `snake_game_tb` (IDLE → PLAY → GAME_OVER). Annotate with arrows: `keyPressed` pulses, `dir` changes, `tick` strobes, head coordinates advancing, `crash` rising at the wall, and the `state` transition to `GAME_OVER`.

4 Game Logic Block

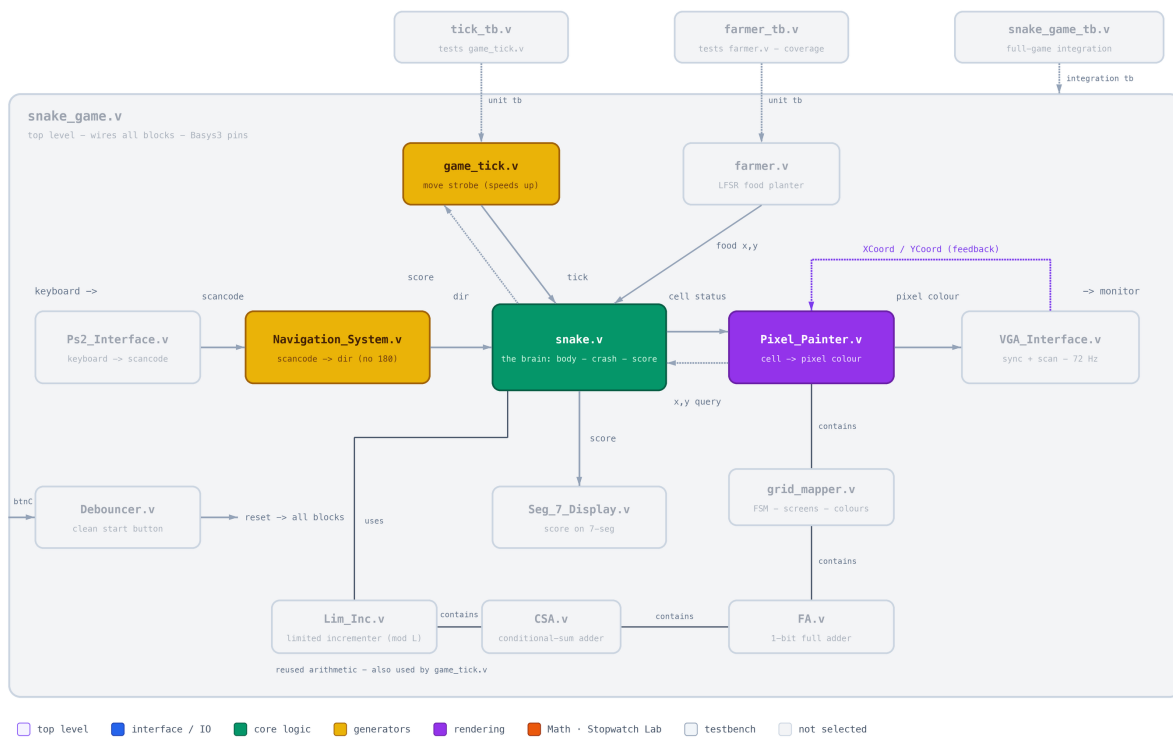


Figure 3: Internal logic modules highlighted.

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Game-logic block highlighted: the snake core, its food generator and the food-coverage testbench.

4.1 snake.v – the game core

Purpose. Owns the snake body, movement, growth, collision detection and score.

Table 3: Snake interface (parameters GRID_X, GRID_Y).

Port	Dir	Width	Description
clk, reset	in	1	Clock and synchronous reset.
tick	in	1	Movement strobe from <code>Game_Tick</code> .
dir	in	2	Direction from <code>Navigation_System</code> .
keyPressed	in	1	Entropy for the food LFSR.
x, y	in	7/7	Cell queried by the renderer.
on_snake, is_head, is_food	out	1	Answers to the query: body / head / food at (x, y) .
crash	out	1	Latched game-over flag.
score	out	16	Current score (= snake length).

Internal design. The body is stored as two coordinate register arrays `body_x/body_y[0..63]` (`MAX_LEN= 64`) with the head at index 0. Movement is a shift: on every tick each element copies its predecessor and the head takes the freshly computed next position. Combinational logic computes the next head from `dir`, and a 64-way comparison loop checks whether the next head lands on the body (self collision) or the query cell lies on the body (render query). To relax timing, the next-head, self-hit and eat signals are registered one clock before being consumed (`next_x_r`, `hit_self_r`, `is_eaten_r`, `tick_d`). A crash is latched when the next head leaves the grid or hits the body; growth happens when the next head equals the food cell. The food position proposed by `farmer` is latched into `plant_x/plant_y` only when the food is eaten (or at reset), so the food stays put between meals.

Verification. Exercised in full by `snake_game_tb` (movement, steering, growth, wall crash, restart); the per-tick log prints head position and length so the shift behaviour is directly observable.

4.2 farmer.v – food generator

Purpose. Proposes pseudo-random food coordinates.

Internal design. A 16-bit Fibonacci LFSR (taps 15, 13, 12, 10, seed 0xABCD) shifts every clock; the keyboard strobe `keyPressed` is XOR-ed into the feedback as a source of true user-driven entropy. The outputs are `food_x = lfsr[6:0] mod GRID_X` and `food_y = lfsr[13:7] mod GRID_Y`. Since the LFSR runs at 100 MHz, the value latched by `snake` at eat time is effectively random with respect to the game timescale.

Verification – `farmer_tb.v` and coverage. The unit testbench clocks the LFSR 15,000 times (≈ 2 proposals per grid cell), toggles `keyPressed` randomly ($\approx 1\%$ of clocks) and records every proposed coordinate. Figure 4 shows the resulting coverage of the 100×75 grid: green cells were proposed at least once, dark cells never.

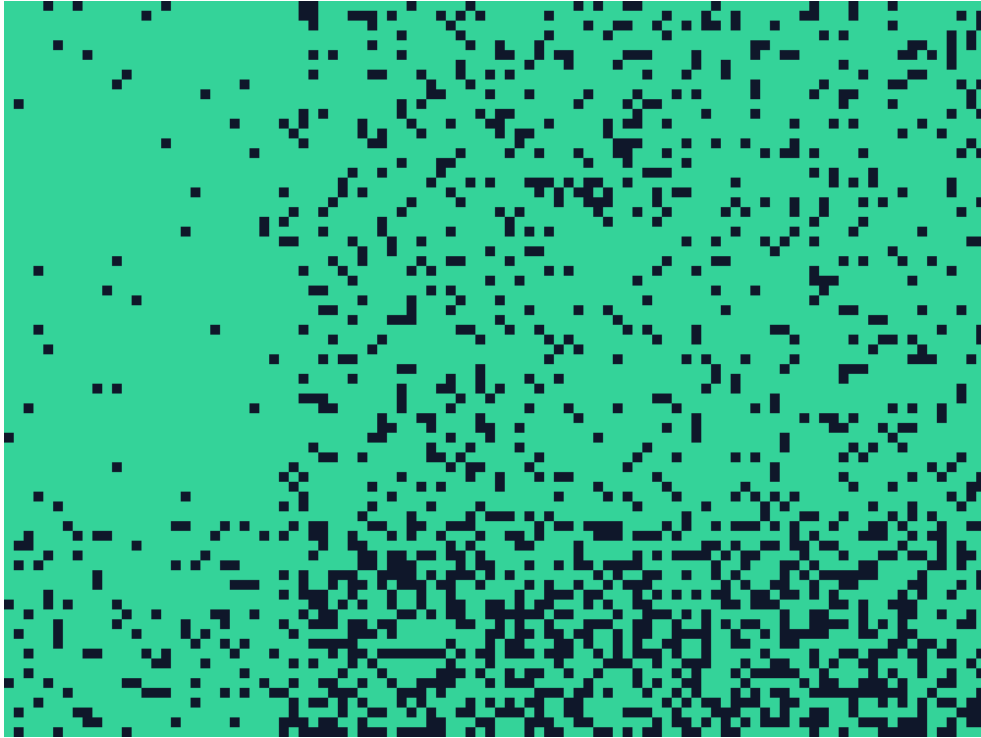


Figure 4: Food-placement coverage recorded by `farmer_tb` (15,000 samples on the 100×75 grid; green = proposed at least once, dark = never proposed).

The map also makes the *modulo bias* of the generator visible: as `food_x` is a 7-bit value (0–127) reduced mod 100, columns 0–27 are proposed twice as often – the denser left band in the figure; likewise rows 0–52 for `food_y` (mod 75). Every cell of the grid is reachable, and the bias is invisible during play, so this was accepted as a good trade-off for such a cheap generator.

5 Timing Block

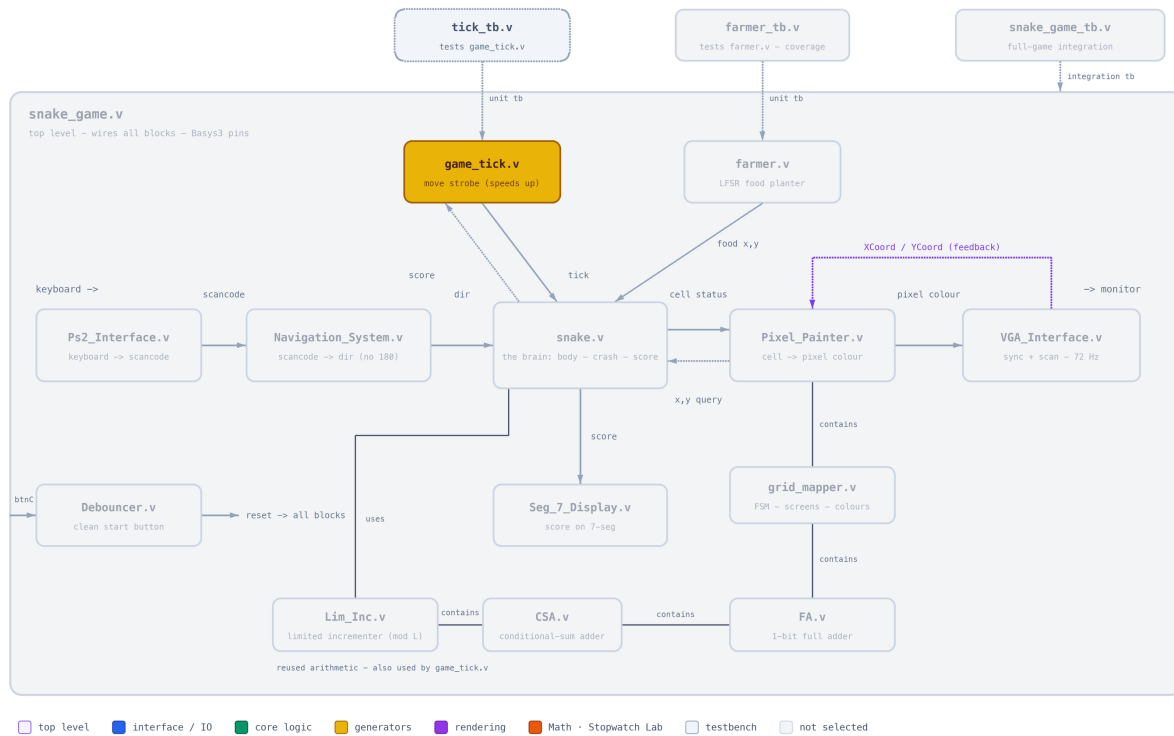


Figure 5: Timing block highlighted.

5.1 game_tick.v

Purpose. Generates the movement strobe and implements the difficulty ramp: the higher the score, the faster the snake.

Internal design. A counter compares against a programmable period `tick_speed` and emits a one-clock `tick` pulse on wrap-around. The period starts at the parameter `TICK_MAX` (14,285,714 clocks = 7 Hz at 100 MHz) and decreases linearly with the score:

$$\text{tick_speed} = \text{TICK_MAX} - \text{score} \cdot 2^{18},$$

clamped after 54 steps so the period never underflows. The module is fully parametric in `TICK_MAX` (the testbench and top level both instantiate it explicitly with their own value).

Table 4: Tick rate vs. score (at 100 MHz, `TICK_MAX`= 14,285,714).

Score	1	10	20	30	40
Tick rate	7.1 Hz	8.6 Hz	11.1 Hz	15.6 Hz	26.3 Hz

Verification – `tick_tb.v`. The unit testbench sweeps the score through 0, 10, 50, 60, 64, 80 (crossing the clamp) and exposes the internal period plus a derived frequency probe (`hz = 100 MHz / tick_speed`) so the ramp and the clamping are directly visible in the waveform.

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Annotated waveform of `tick_tb`: arrows on the shrinking distance between `tick` pulses as `score` steps up, and on `tick_speed` saturating once the clamp ($\text{score} \geq 54$) is reached.

6 Rendering Block

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Rendering block highlighted.

6.1 `PixelPainter.v`

Purpose. Bridges between the pixel domain (VGA scan coordinates) and the cell domain (game grid), and composes the final pixel colour.

Internal design. The scan position is divided by 8 (`XCoord >> 3`) to obtain the queried grid cell (x, y) , and by 4 to obtain the 200×150 bitmap coordinates used by the splash screens. The cell colour returned by `GridMapper` is overlaid with black 1-pixel grid lines (every 8th row/column) while the game is in `PLAY`; `start_game` (i.e. “the game is on the `PLAY` screen”) is exported to the top level, where it releases the snake core from reset.

6.2 `grid_mapper.v`

Purpose. The screen FSM and colour oracle: decides *what is shown* for every cell in each game phase.

Internal design. A three-state FSM – `IDLE` (welcome screen), `PLAY`, `GAME_OVER` – advances on `keyPressed` and `crash`. Two 200×150 monochrome bitmaps are preloaded with `$readmemb` into block RAM: the welcome splash and the skull “YOU DIED” screen (Figure 6). In `PLAY`, a priority `casez` paints head, food, body and finally the background checkerboard, whose odd/even parity is computed by the reused full adder (FA) as $x_0 \oplus y_0$.

Table 5: Colour palette (12-bit RGB) in `grid_mapper.v`.

Element	Colour	Element	Colour
Snake head	0x222	Background even	0x0C0
Snake body	0x444	Background odd	0x0F0
Food	0xF11	Grid lines	0x000
Skull	0xEEC	“YOU DIED” text	0xE11
Welcome bright	0x6E2	Welcome dark	0x021

Figure 6: The two 200×150 bitmap screens rendered by `GridMapper`: welcome splash (left, IDLE state) and game-over screen (right, GAME_OVER state) – the implemented bonus requirement.

6.3 FA.v

Purpose. The classic 1-bit full adder from the first experiment. Here its sum output ($a \oplus b \oplus c_{in}$, with $c_{in} = 0$) computes the checkerboard parity of a cell from $x[0]$ and $y[0]$ – a small, deliberate reuse of the earliest building block of the course.

Verification. Verified exhaustively in Lab 1; its effect is the visible checkerboard in every gameplay screenshot.

7 Output Block

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Output block highlighted.

7.1 VGA_Interface.v

Purpose. Generates VESA 800×600 @ 72Hz timing, drives the RGB pins with the colour supplied by the renderer, and exports the scan coordinates.

Table 6: VGA timing (800×600 @ 72 Hz, 50 MHz pixel clock).

	Visible	Front porch	Sync	Back porch	Total
Horizontal (pixels)	800	56	120	64	1040
Vertical (lines)	600	37	6	23	666

Internal design. Instead of deriving a divided 50 MHz clock, the module runs entirely at 100 MHz with a `pix_en` clock-enable that fires every second cycle – a single clock domain, which keeps timing analysis clean (see Section 10). Counters `h_count/v_count` generate `Hsync/Vsync` and are exported as `XCoord/YCoord`; RGB is blanked outside the visible region.

Verification. Reused from Lab 6 where it was verified against the monitor and in simulation; here it is exercised by `snake_game_tb` and by the live display.

7.2 Seg_7_Display.v

Purpose. Shows the 16-bit score on the 4-digit 7-segment display.

Internal design. A free-running divider (`clkdiv[19:18]`) multiplexes the four digits at ≈ 95 Hz per digit refresh; each 4-bit nibble is decoded to segments by a truth table, and one active-low anode is selected at a time. The score is displayed in hexadecimal nibbles, which is sufficient for the achievable snake lengths.

Verification. Reused unchanged from the first experiments; verified live – the display increments each time the snake eats.

8 Utilization of Previous Labs

A central goal of this experiment was to leverage previous work. Table 7 summarises what was taken and how it was adapted.

Table 7: Reused modules and concepts.

Module	From	Adaptation for the Snake game
<code>FA.v</code>	Lab 1	Unchanged; wired as a 1-bit XOR to compute the background checkerboard parity.
<code>Seg_7_Display.v</code>	Lab 1	Unchanged; input vector connected to the live score instead of a stopwatch count.
<code>Debouncer.v</code>	Lab 1	Unchanged; conditions the reset button.
<code>Ps2_Interface.v</code>	Lab 5	Unchanged reuse of the keyboard receiver, including break-code handling – the game only consumes <code>scancode/keyPressed</code> .
<code>VGA_Interface.v</code>	Lab 6	Adapted: the colour is now an input (<code>pixel_color</code>) computed by the new renderer, and the scan coordinates are exported so the renderer can answer “what colour is this pixel?” on the fly.

Beyond whole modules, concepts were reused as well: `Game.Tick` is the counter/frequency-divider pattern from the stopwatch experiments, `GridMapper`’s screen selector applies the FSM methodology from the earlier labs, and the testbench techniques (`$display` logging, VCD dumps, `plusargs`) follow the flow used throughout the course.

9 Results

9.1 Final state of the game

The game is fully functional in simulation and on the board: it boots to the welcome splash, any key starts a round, the snake moves at 7 Hz and accelerates with every food item, the score counts up on the 7-segment display, reversal attempts are ignored, and hitting a wall or the body freezes play and shows the skull game-over screen (bonus requirement), from which a key press returns to the welcome screen. The simulated scenario in `snake_game_tb` reproduces this full lifecycle.

9.2 Photos of the game in action

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Photo of the monitor during PLAY: snake, red food, checkerboard background and grid lines visible.

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Photo of the game-over (skull) screen on the monitor, and of the welcome splash.

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Photo of the Basys3 board during a game: score on the 7-segment display, VGA and PS/2 cables connected.

9.3 Working game

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Image of the working game — photo/screenshot of the monitor running the game. Drop the image (e.g. `working_game.png`) into this folder and replace this box with an `includegraphics` of it.

9.4 Demonstration video

A video of the game running on the Basys3 board is available on YouTube:

<https://youtu.be/REPLACE-ME>

[REPLACE THE LINK ABOVE — set `\youtube\link` at the top of this file to your YouTube URL]

10 Problems Encountered and Solutions

1. **Debouncer X-propagation in simulation.** The debouncer’s hysteresis counter has no reset, so in simulation it powers up as X and the internal reset pulse never resolves (on the FPGA the global reset initialises it). *Solution:* the integration testbench forces the internal `reset` net directly for a few cycles instead of pressing the button.
2. **The real game tick is far too slow to simulate.** At 7 Hz, one snake step takes 14.3 million clocks. *Solution:* `snake_game.tb` generates its own fast tick (every 500 clocks) and forces it onto the internal `tick` net, so a whole game fits in a short simulation.
3. **Keyboard break codes re-triggered keys.** A PS/2 key release sends F0 + scancode, which naively looks like a second key press. *Solution:* the receiver skips E0/F0 bytes and re-arms on the byte following F0, so exactly one `keyPressed` fires per physical press.
4. **Timing warnings from a divided pixel clock.** Driving logic from a register-divided 50 MHz clock produced “non-clocked sequential cell” critical warnings in Vivado. *Solution:* the VGA module was restructured to run at 100 MHz with a `pix_en` clock-enable every second cycle – one clock domain, no derived clocks.
5. **Long combinational paths in the body scan.** Comparing the next head against all 64 body slots combinatorially, directly at the tick, created long paths. *Solution:* the next-head coordinates, self-hit and eat flags are registered one cycle before the movement update consumes them (`next_x_r`, `hit_self_r`, `is_eaten_r`).
6. **Food generator bias.** The coverage run (Figure 4) exposed the modulo bias of the LFSR mapping. Rather than adding a rejection loop, the bias was measured, shown to leave every cell reachable, and accepted; keyboard entropy was mixed into the LFSR feedback to decorrelate games.

7.

[PLACEHOLDER – RESULT NOT YET AVAILABLE]

Any additional problems encountered during the in-lab session and their solutions.

11 Conclusion

The experiment achieved all mandatory requirements and the bonus: a playable, accelerating Snake game with VGA graphics, keyboard control, hardware score display, and dedicated welcome and game-over screens. The design cleanly separates reused interface blocks from the new game logic, is parametric in the grid size and game speed, and was verified bottom-up – unit testbenches for the new generator modules, a coverage analysis for the food placement, and a full-game integration testbench that walks the complete IDLE → PLAY → GAME_OVER lifecycle.