

AN ANALYSIS AND SIMULATION OF DEFENDING TRACKING CONTROL NEURAL NETWORK FOR KNOWN AFFINE DISCRETE-TIME NONLINEAR SYSTEMS AGAINST ADVERSARIAL ATTACKS



Ablasse Kingcaid-Ouedraogo, University of North Texas
Mentor: Dr. Pavlo Tymoshchuk, University of North Texas
Kingcaid0uedraogoA@uhv.edu · Pavlo.Tymoshchuk@unt.edu

Abstract

A neural network (NN) tracking control for discrete-time nonlinear systems with known internal dynamics is designed. The adversarial attack on the tracking control NN is modeled as additive stochastic noise injected into the output of the signal function of the controller. The adversarially perturbed system and the corresponding closed-loop tracking dynamics are derived, and the resulting degradation in tracking performance is demonstrated. The defense is based on rounding the noisy output of the signal function. When the perturbation magnitude is less than one half, the rounding recovers the correct signal function value, and the defended closed-loop dynamics reduce to the unperturbed system. The nominal MATLAB reference and the corresponding C++ implementation agree to machine precision. The attacked implementations show the same qualitative degradation pattern under independent stochastic samples, while the defended C++ response coincides with the nominal reference when the perturbation is inside the rounding-recovery threshold. The elapsed time of the C++ implementation is less than that of the MATLAB implementation by approximately two orders of magnitude.

Introduction

The tracking control problem is one of the most fundamental practical problems in control theory, where the goal is to design a controller that allows a system to follow a desired trajectory or reference signal over time. In recent years, neural networks have been increasingly used in control systems due to their ability to approximate complex nonlinear functions and adapt to changing conditions. However, the use of neural networks in control systems also introduces new vulnerabilities, particularly to adversarial attacks. Small, practically undetectable perturbations in the input of a neural network can lead to outsized adverse effects on the output, which can be particularly problematic in control systems where safety and reliability are paramount.

A tracking control neural network (NN) for the known affine in the inputs, discrete-time nonlinear system was presented in [1]. The paper describes a method of tracking control that is of moderate complexity and requires no training. This method uses a signum activation function of the tracking error, as well as a diagonal matrix of the learning rate parameters to drive the system state towards the reference trajectory in finite time. The method is inherently robust to bounded uncertainties and disturbances.

Mathematical Model and Block Diagram

The known affine in the inputs, discrete-time nonlinear system obtained by Euler approximation can be presented as follows [1]:

$$x(k+1) = x(k) + \tau[f(x(k)) + g(x(k))u(k)] \quad (1)$$

where $x(k)$ is the discrete-time state, f and g are the internal and coupling dynamics, $u(k)$ is the control input, τ is the sampling step, and $e(k) = x(k) - r(k)$ is the tracking error with respect to the reference $r(k)$. The control input is given by [1]

$$u(k) = g(x(k))^{-1}[-f(x(k)) + \Delta r(k) - \beta \operatorname{sgn}(e(k))] \quad (2)$$

where $\beta = \operatorname{diag}(\beta_1, \dots, \beta_n)$ is the diagonal matrix of learning-rate parameters and $\Delta r(k) = r(k+1) - r(k)$ is the first-order finite difference of the reference. Substituting (2) into (1) yields the tracking error recursion

$$e(k+1) = e(k) - \beta \operatorname{sgn}(e(k)) \quad (3)$$

The adversarial attack is modeled [3] as an additive stochastic perturbation $\epsilon(k)$ with normal distribution, zero mean, and standard deviation $\sigma = 1$, injected at the output of the signal function:

$$\tilde{s}(k) = \operatorname{sgn}(e(k)) + \epsilon(k) \quad (4)$$

Since $\operatorname{sgn}(e(k)) \in \{-1, 0, +1\}$, the defended output obtained by nearest-integer rounding

$$\hat{s}(k) = \operatorname{round}(\tilde{s}(k)) \quad (5)$$

satisfies $\hat{s}(k) = \operatorname{sgn}(e(k))$ whenever $|\epsilon(k)| < \frac{1}{2}$, so the defended closed-loop state equation reduces to the unperturbed system.

The defended closed-loop functional block diagram derived from equations (1)–(5) is shown in Fig. 1.

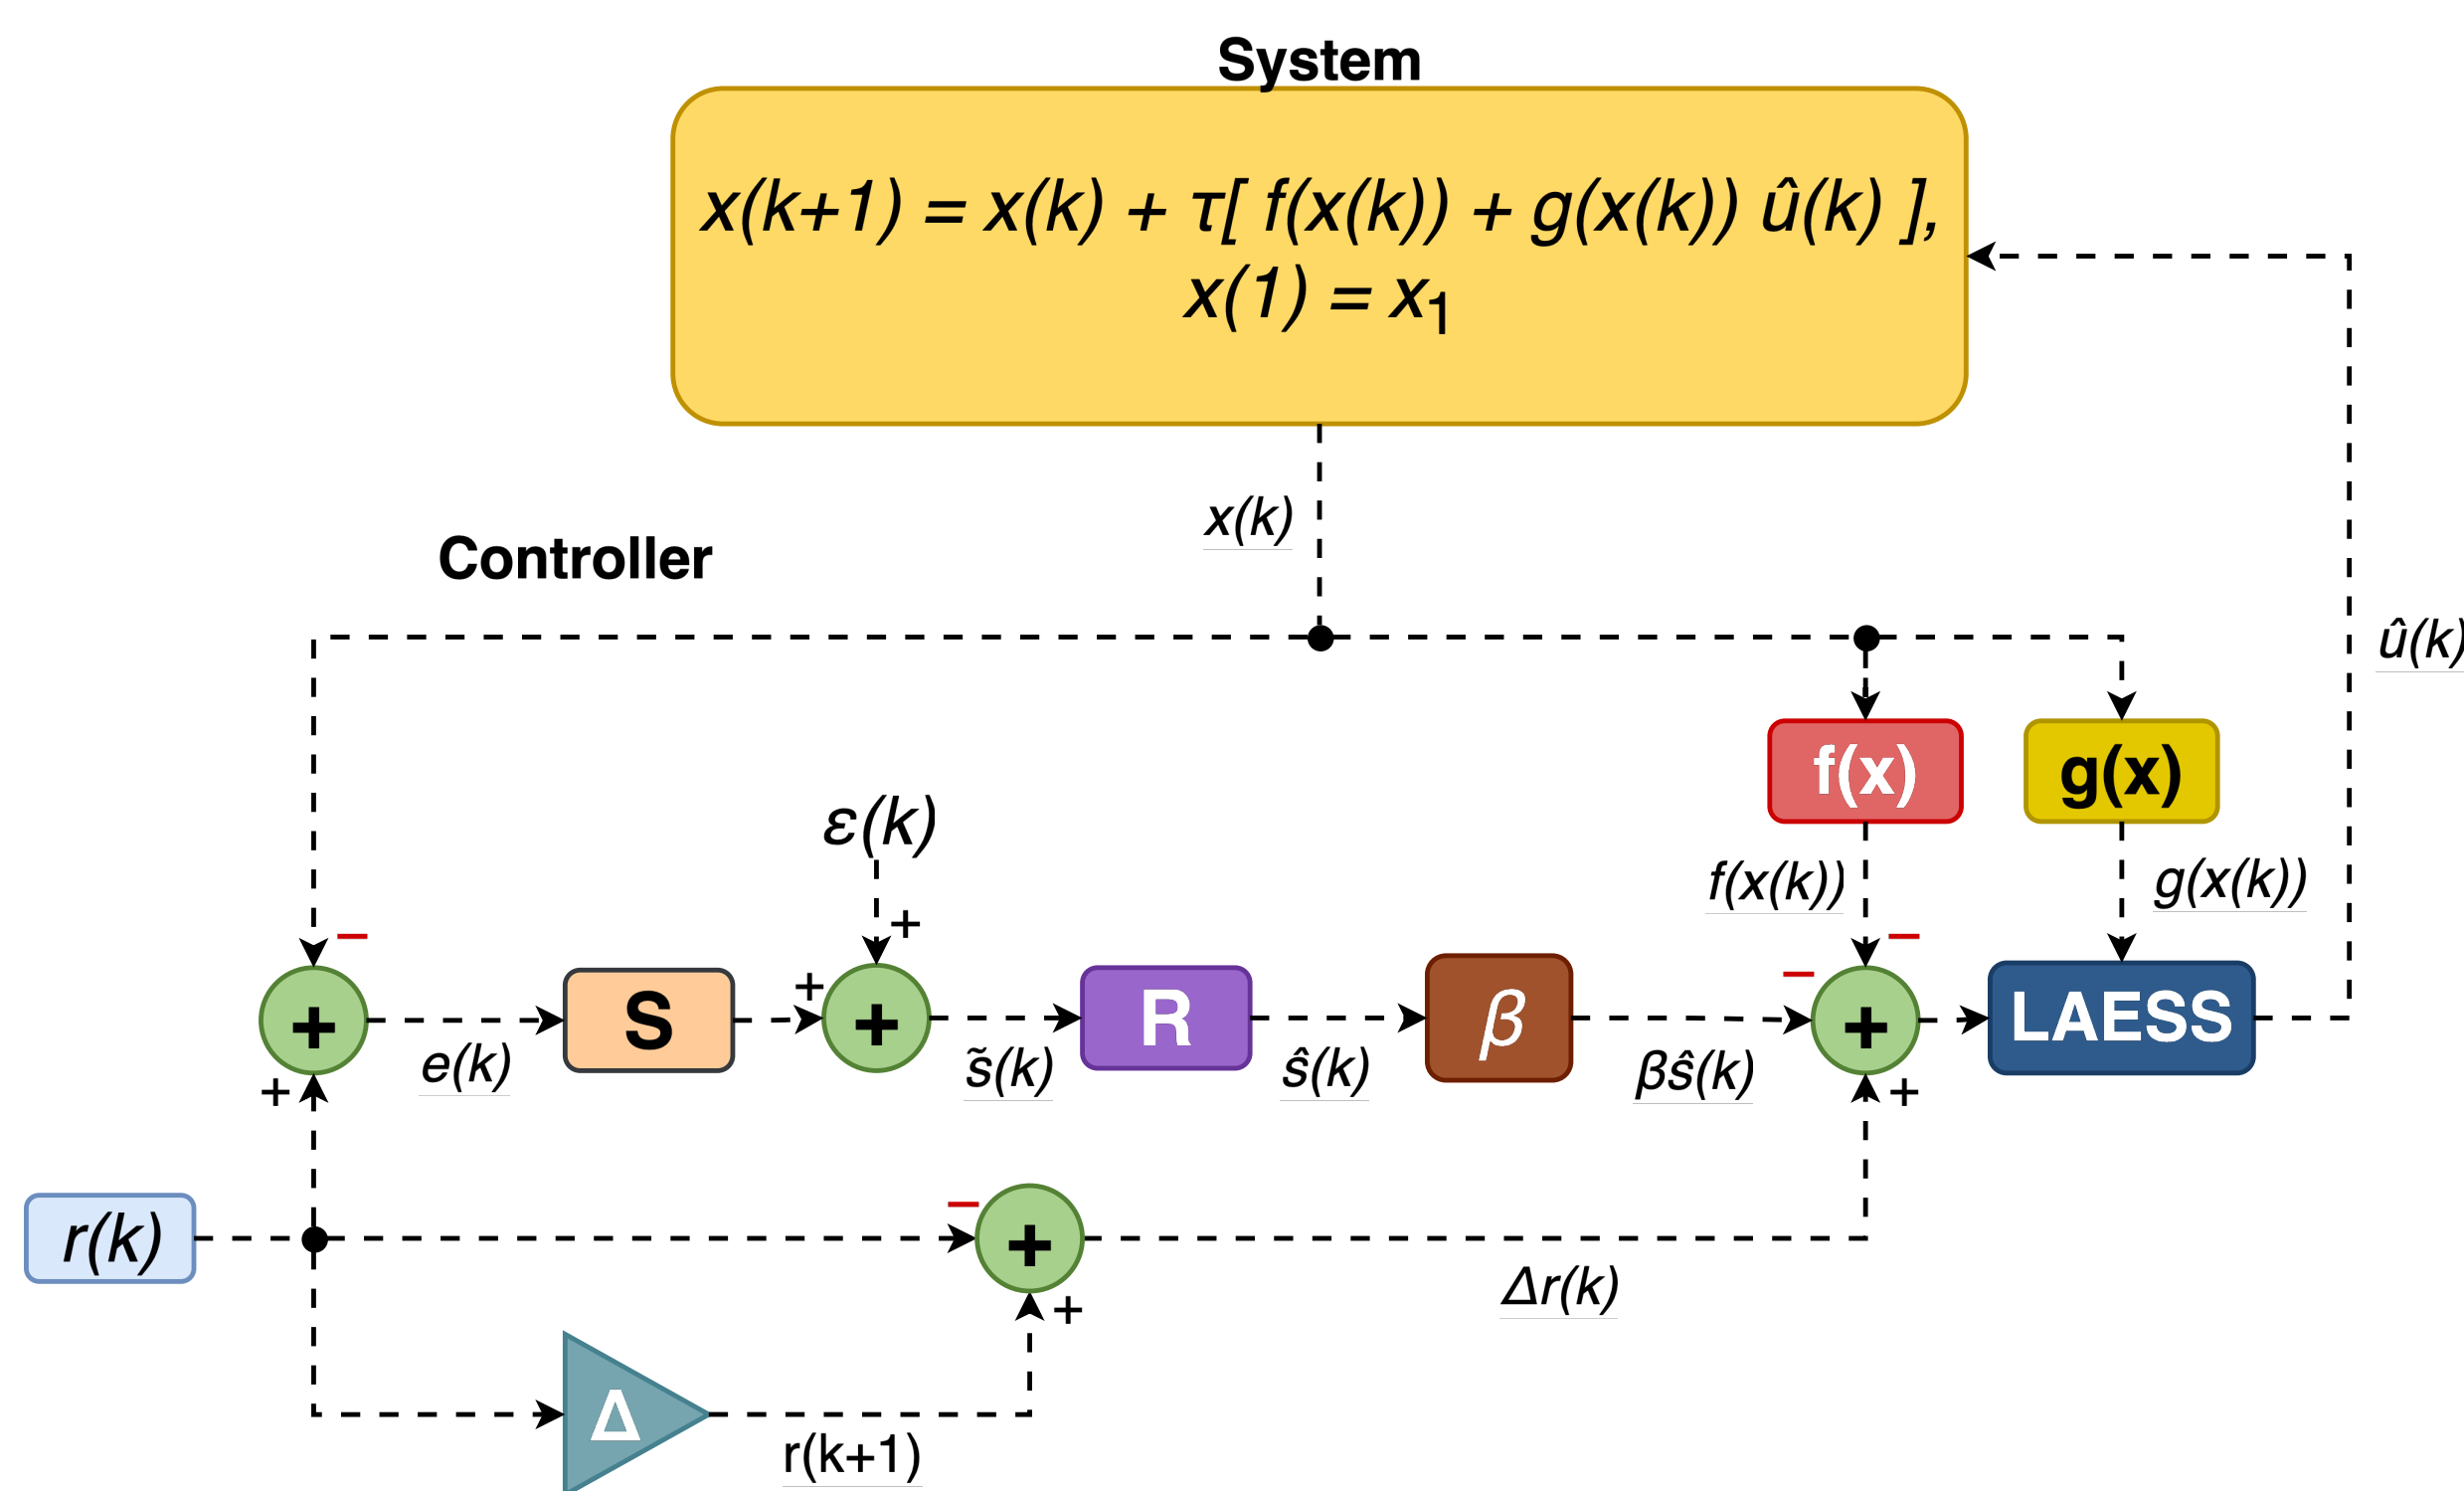


Fig. 1. Functional block diagram of the defended closed-loop system. The block S computes $\operatorname{sgn}(e(k))$, $\epsilon(k)$ is the zero-mean Gaussian disturbance, R is nearest-integer rounding, Δ forms $r(k+1) - r(k)$, and LAESS applies the control law using f , g , and β .

Functional Description and Comparative Analysis

The controller of Fig. 1 moves the state $x(k)$ toward the reference $r(k)$ through the signum activation function and the diagonal learning-rate matrix β , which determine the finite-time convergence of $e(k)$ to zero [1]. Compared with the neural-network optimal control approach of [2], which minimizes a quadratic cost functional and requires offline training, this tracking controller has moderate complexity and requires no training. The defended diagram extends the unperturbed system of [1] by adding the stochastic perturbation $\epsilon(k)$ after S and the rounding block R. Compared with the projected-gradient defense of [4], the proposed defense uses the discrete codomain $\{-1, 0, +1\}$ of the signum activation to obtain the recovery condition $|\epsilon(k)| < \frac{1}{2}$.

Runtime Comparison

Simulation implementations of the unperturbed and perturbed systems were developed in MATLAB and C++. The elapsed time of the full CSTR simulation over $n = 45,000$ steps with time step $\tau = 0.001$ s is shown in Table 1. The results show that the C++ implementation is approximately two orders of magnitude faster for both configurations. The nominal state and tracking error trajectories are identical between the MATLAB and C++ implementations to machine precision. For the attacked case, independent stochastic samples give qualitatively consistent but not identical trajectories.

Table 1. Elapsed time of the full CSTR simulation ($n = 45,000$ steps, $\tau = 0.001$ s).

Configuration	MATLAB (s)	C++ (s)
Unperturbed	1.08	4.11×10^{-3}
Perturbed	1.16	4.64×10^{-3}

Conclusions

A defense based on rounding the noisy output of the signal function is formulated for known affine discrete-time nonlinear systems. The two main results are: (i) when the perturbation magnitude satisfies $|\epsilon(k)| < \frac{1}{2}$, the rounding defense recovers the clean signal value, so the defended closed-loop dynamics coincide with the unperturbed system; and (ii) the C++ implementation reproduces the nominal MATLAB reference to machine precision while substantially reducing elapsed simulation time. The attacked MATLAB and C++ trajectories are not expected to be identical unless the same stochastic samples are prescribed.

Simulation Results

The closed-loop dynamics are simulated on the continuous stirred-tank reactor (CSTR) benchmark with $\alpha = 1.0$, $\lambda = 0.3$, $\gamma = 20.0$, $B = 1.0$, $D = 0.072$, $\beta = 100$, and sampling step $\tau = 0.001$ s, over $n = 45,000$ iterations. At each time step a Gaussian noise with zero mean and standard deviation $\sigma = 1$ is added to the output of the signal function as in (4) and rejection-sampled to satisfy $|\epsilon(k)| < \frac{1}{2}$, so the perturbation is bounded by the rounding-recovery threshold on every iteration. The defended system is simulated in C++ and compared against the unperturbed reference system.

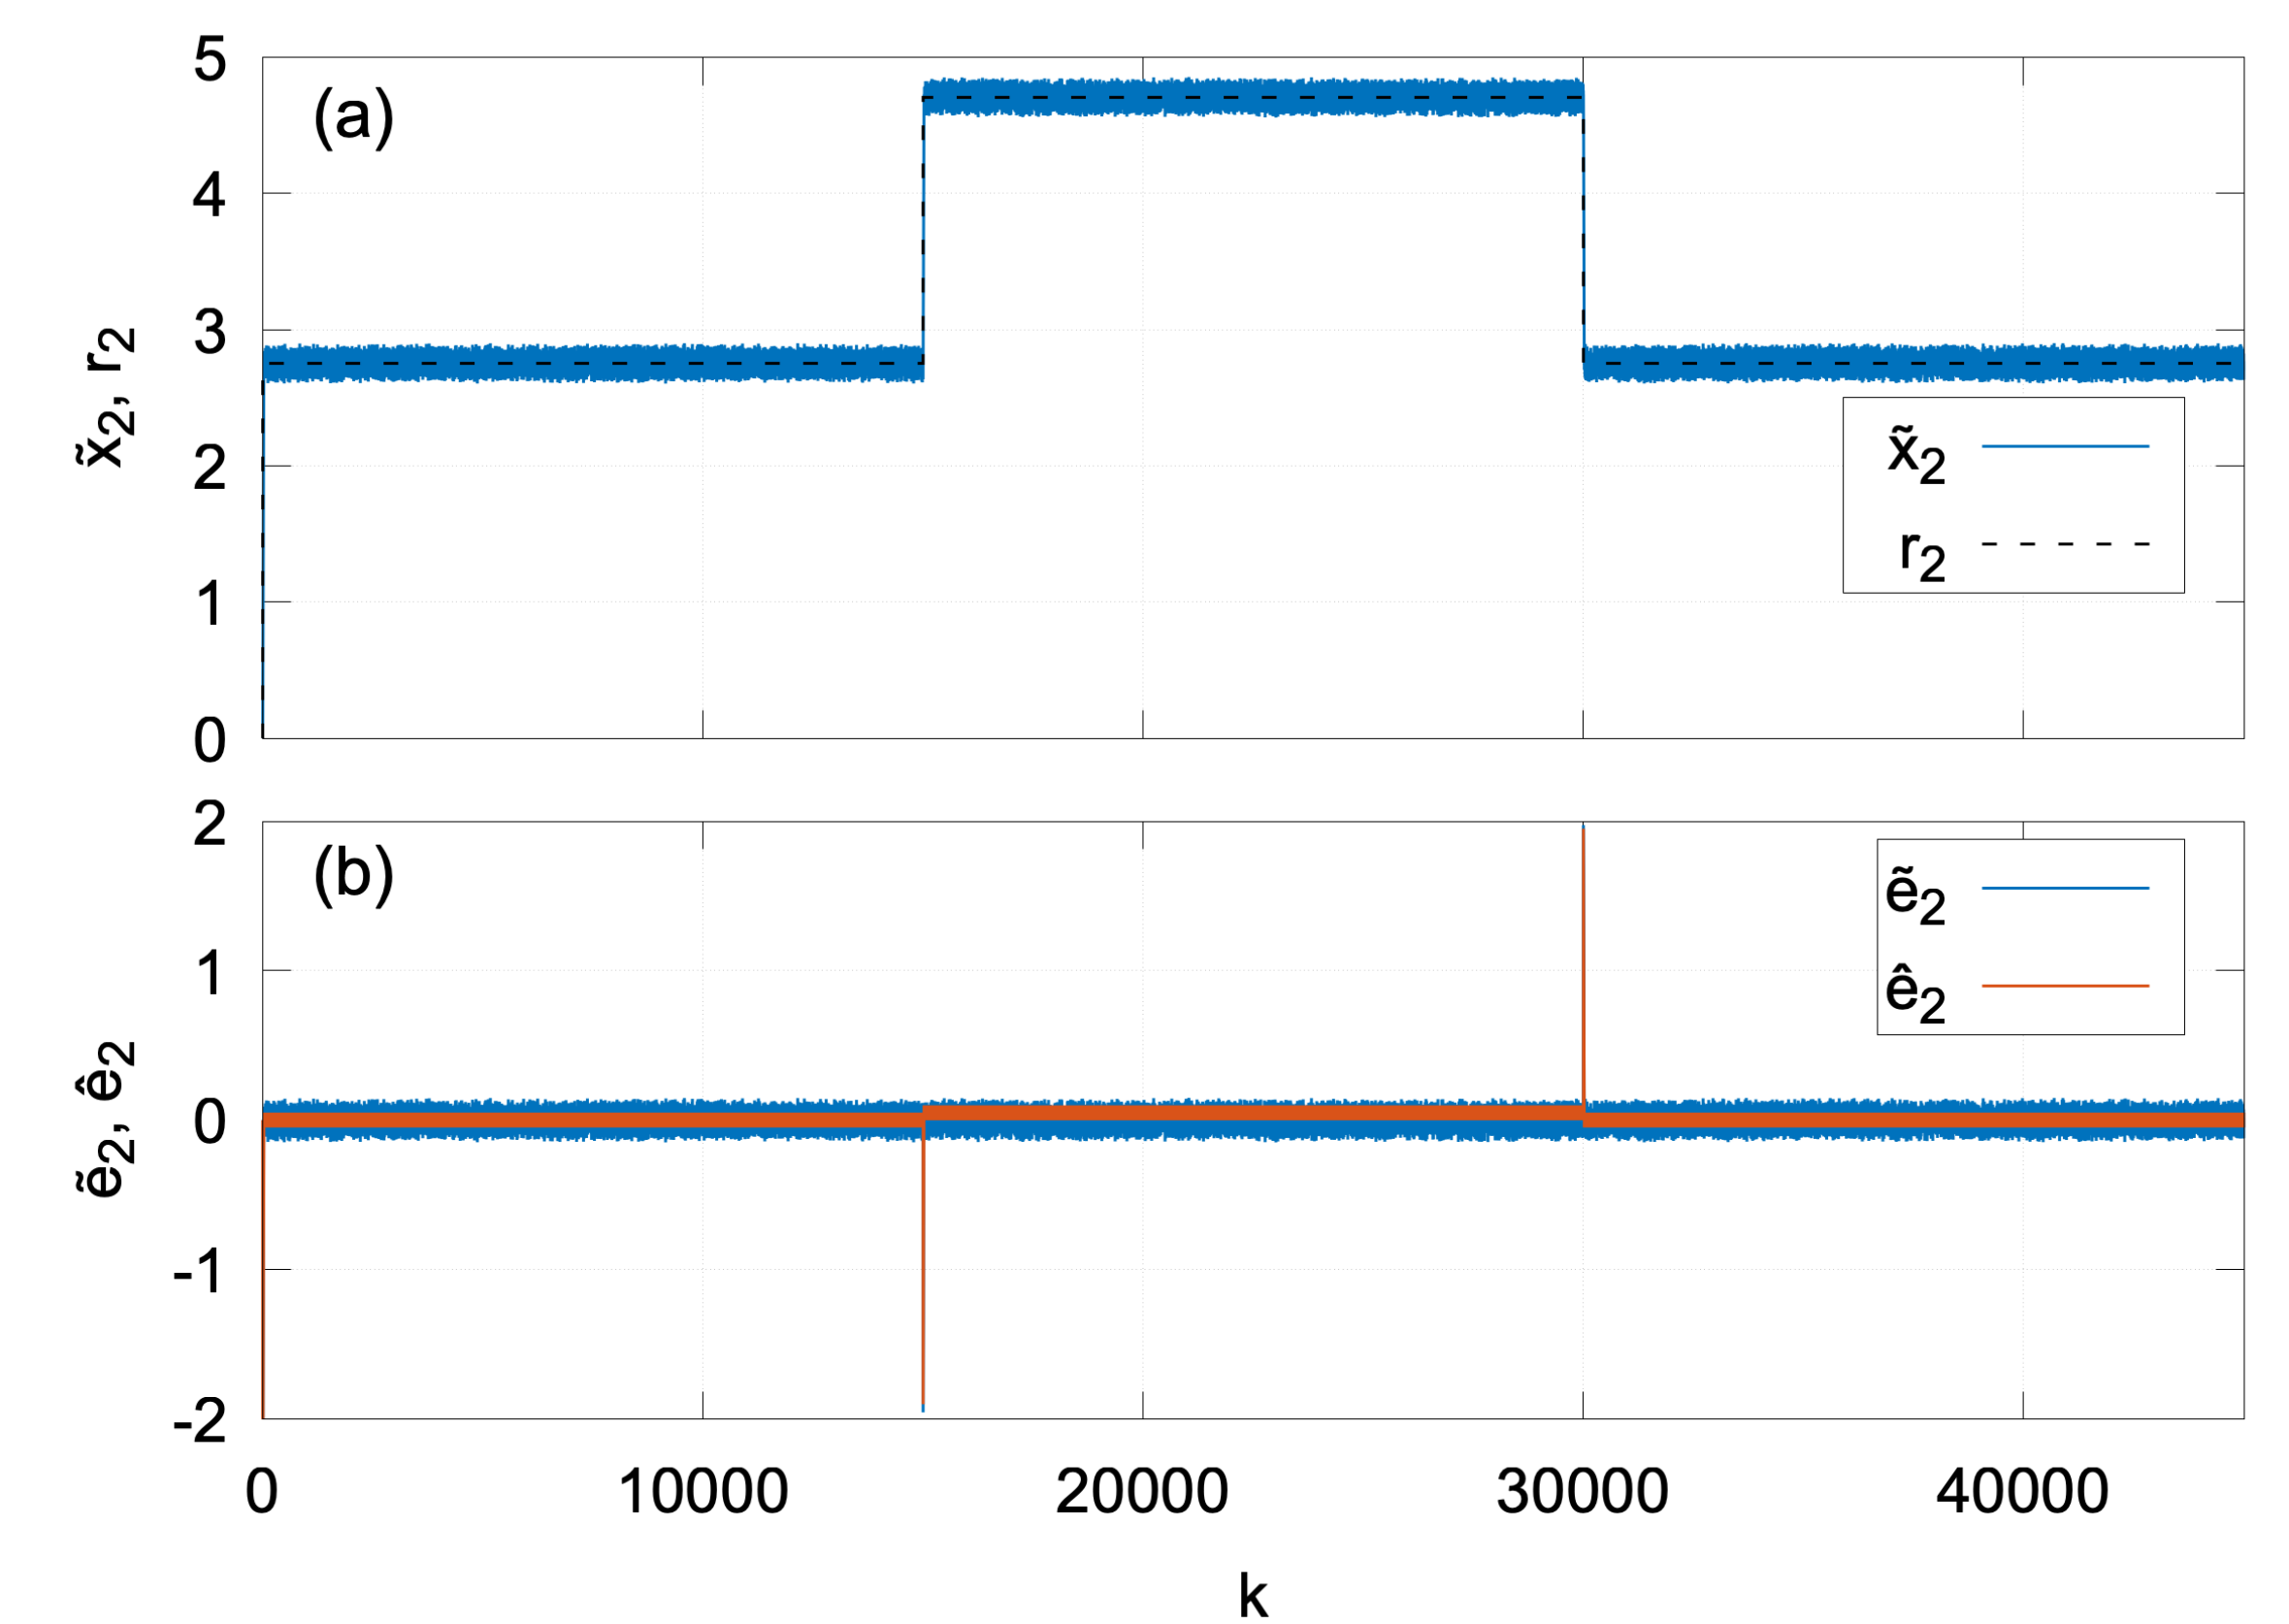


Fig. 2. CSTR closed-loop response under additive stochastic attack, with the tilde marking perturbed quantities and the hat marking defended quantities: (a) perturbed state $\tilde{x}_2$ against reference r_2 ; (b) perturbed tracking error $\tilde{e}_2$ and defended tracking error $\hat{e}_2$ over $n = 45,000$ iterations.

As shown in Fig. 2(a), the attacked CSTR exhibits degraded tracking with visible oscillations of $\tilde{x}_2$ around the reference r_2 . In Fig. 2(b), the defended tracking error $\hat{e}_2$ coincides with that of the unperturbed system at every step, while the perturbed tracking error $\tilde{e}_2$ remains nonzero.

References

- [1] P. Tymoshchuk, “A Tracking Control Neural Network for the Known Affine in the Inputs Discrete-Time Nonlinear Systems,” Tech. Rep., Univ. of North Texas, 2024.
- [2] P. Tymoshchuk, “Neural network optimal control for discrete-time nonlinear systems with known internal dynamics,” *Neural Comput. & Appl.*, vol. 36, pp. 4421–4434, 2024.
- [3] H. Hajri *et al.*, “Neural adversarial attacks with random noises,” *Int. J. Artif. Intell. Tools*, vol. 32, no. 6, 2023.
- [4] A. Madry *et al.*, “Towards deep learning models resistant to adversarial attacks,” arXiv:1706.06083, 2019.

Future Work

Future work extends the threat model from additive stochastic noise to projected gradient descent (PGD) adversarial attacks [4], analyzes attacks injected directly on the state input $x(k)$ and the reference trajectory $r(k)$ rather than at the output of the signal function, generalizes the rounding defense to quantization-aware schemes for continuous activations, and carries out hardware-in-the-loop validation of the C++ controller on FPGA and Arduino targets, including piezoelectric positioning stages.

Acknowledgements

This material is based upon work supported by the National Science Foundation under Grant Numbers **CNS-2137791** and **HRD-1834620**. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the National Science Foundation. The author thanks **Dr. Pavlo Tymoshchuk** for mentorship and the sponsoring program for research support.