Sensors and Instrumentation (EEL208)

by

Dr. Saikat Sahoo
Department of Mechatronics

Indian Institute of Technology Bhilai

Variable inductance transducers

- Change of self-inductance
- Change of mutual inductance
- Production of eddy current

Self inductance

- Differential output configuration
- Advantages
  - Sensitivity and accuracy are increased
  - Output is less affected by the external magnetic field
  - Variation due to temperature changes is reduced
  - Effect of change in supply voltage is reduced

Mutual inductance

- Working principle
- Air-cored coils
- Iron core coils
  - Advantages: small size and less sensitive to external magnetic field

Eddy current transducers

- Working principle
- Application

Eddy current transducers

Numerical example 1:

In a variable reluctance type proximity inductive transducer shown in the Figure the coil has an inductance of 2 mH when the target made of ferromagnetic material is 1 mm away from the core. Calculate the value of inductance when a displacement of 0.02 mm is applied to the target in a direction moving it towards the core. Show that the change in inductance is linearly proportional to the displacement. Neglect the reluctance of the iron parts.

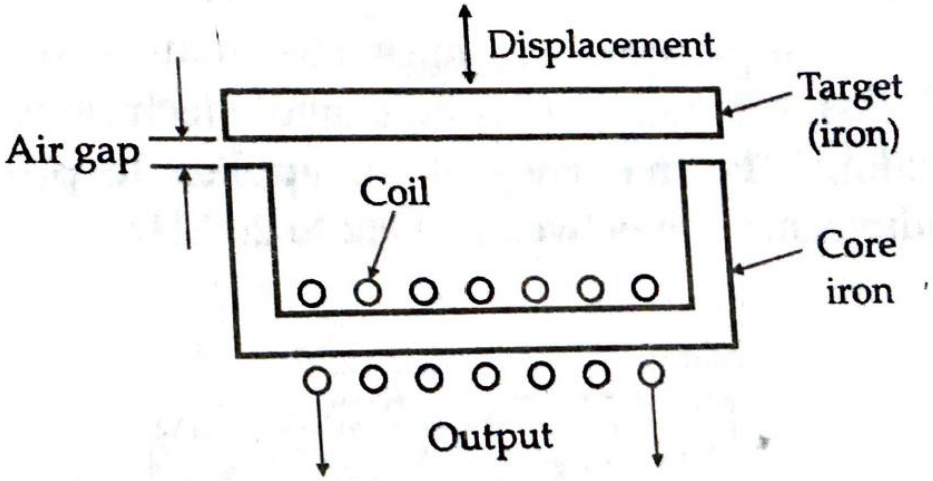

Ans: Change in inductance = 40 uH

Eddy current transducers

Why iron core inductors are not used for high-frequency applications?

- **Eddy current loss**
- **Hysteresis loss**
- Saturation of core
- Poor permeability

LVDT

- Core: nickel and iron alloy
- Working principle
- Input frequency = 50 Hz to 20 kHz
- Connected in series opposition
- Phase difference
- Residual voltage

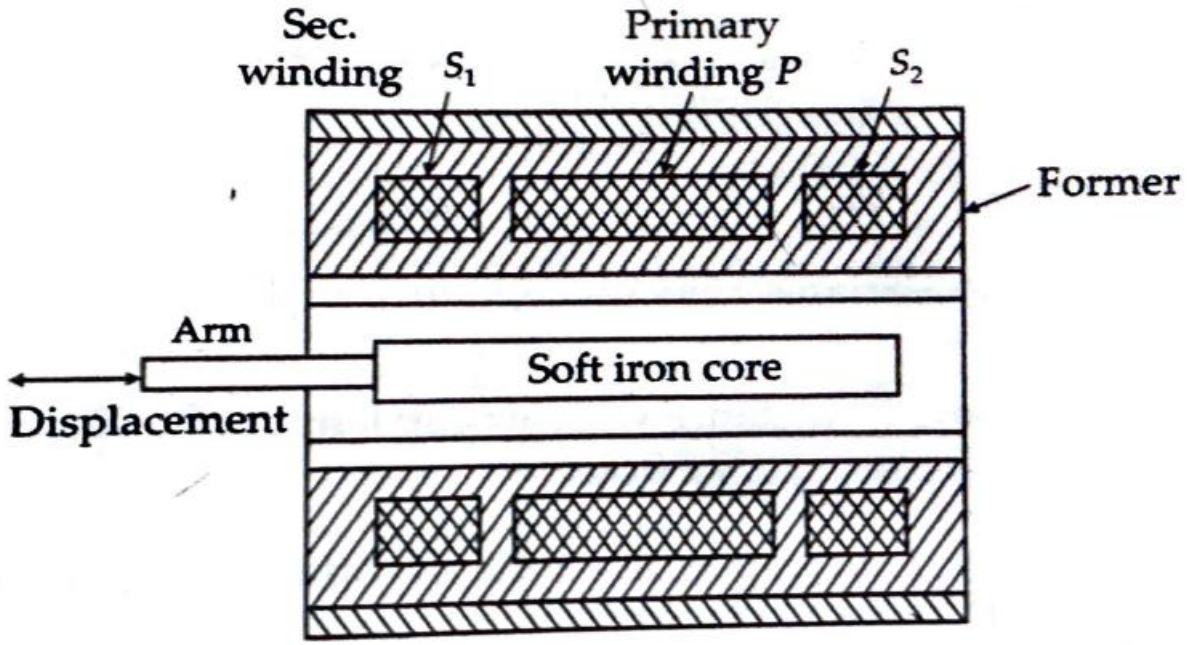

Advantages of using LVDT

- Linearity
- High resolution
- High output
- High sensitivity
- Ruggedness
- Less friction
- Low hysteresis
- Low power consumption

Disadvantages of using LVDT

- Sensitive to stray magnetic field
- Sensitive to temperature change
- Limited to frequency application below 20 kHz

LVDT

- Polarity sensitive demodulator

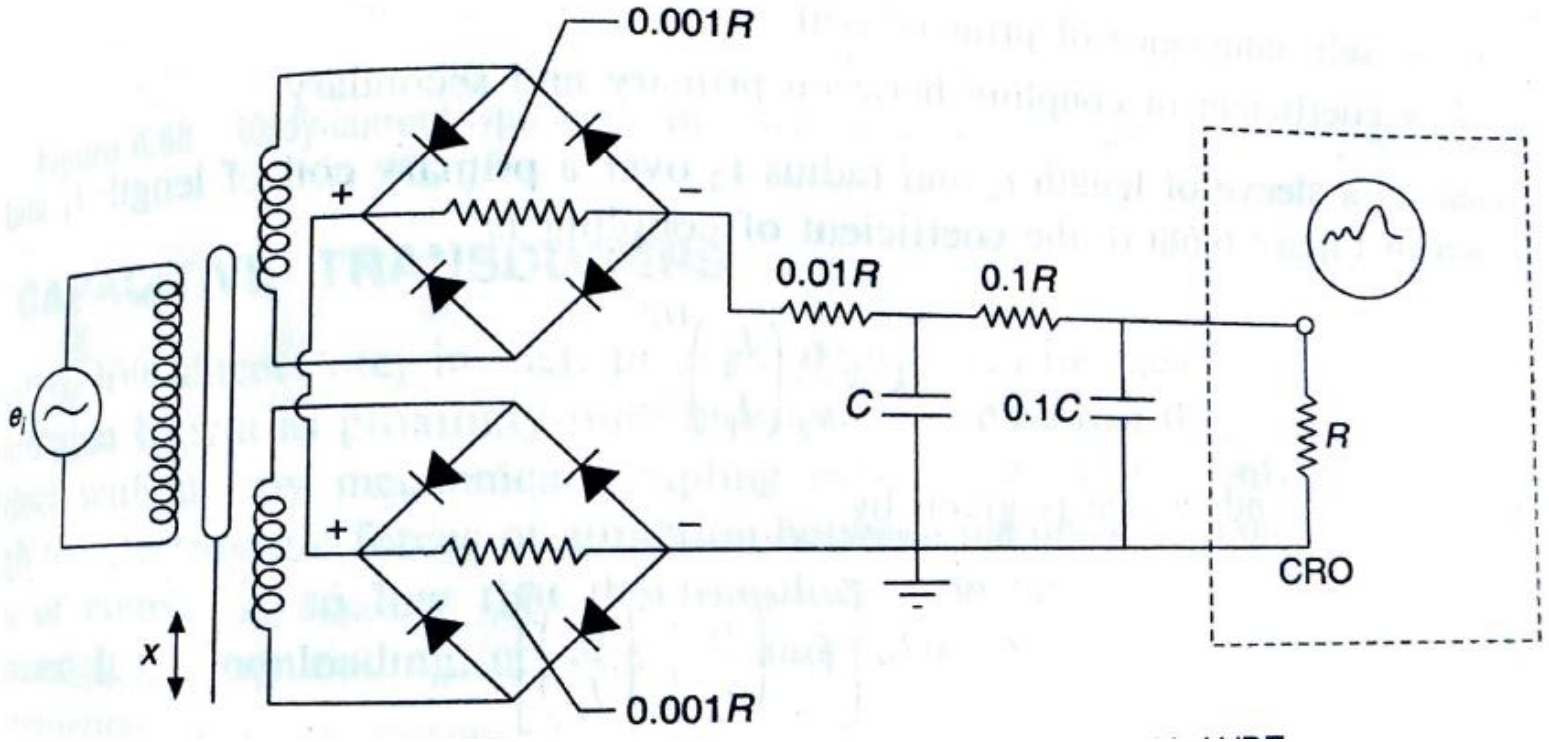

RVDT

- Working principle

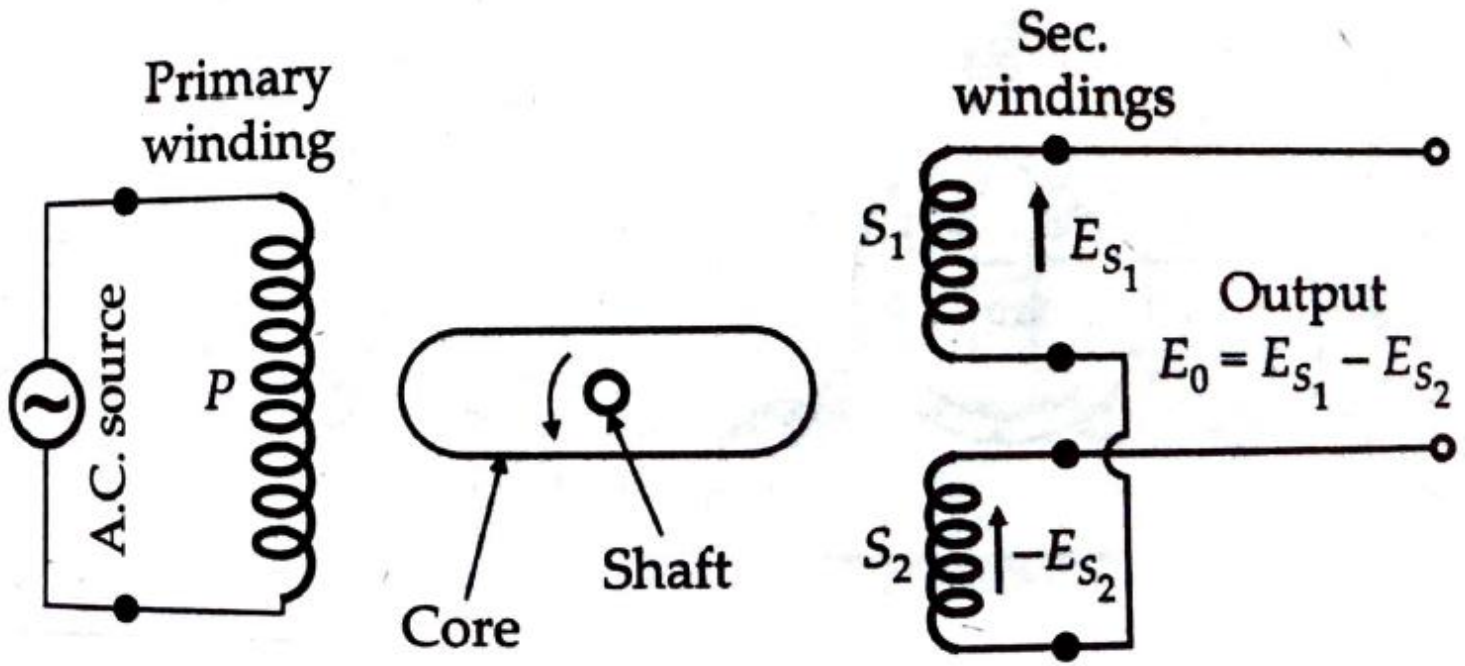

LVDT

- Application:

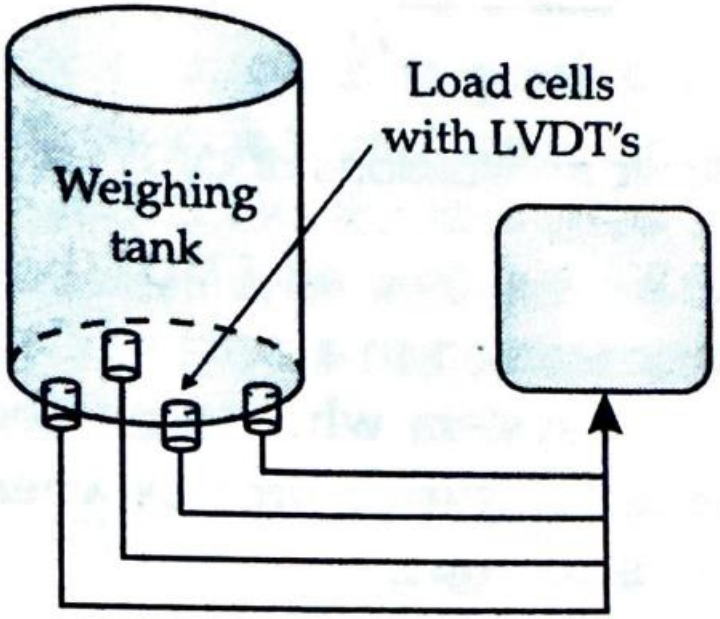

LVDT

- Application:

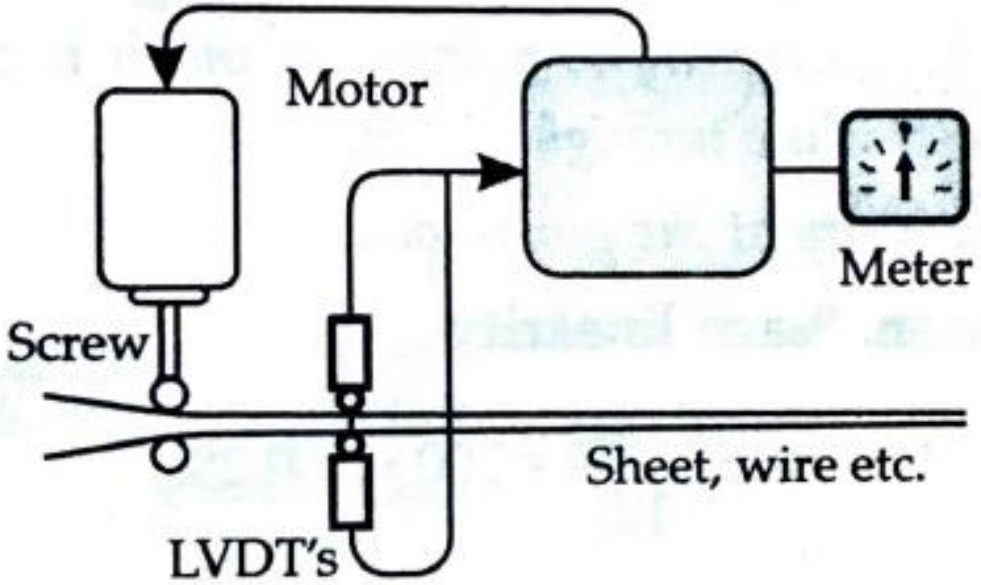

LVDT

- Application:

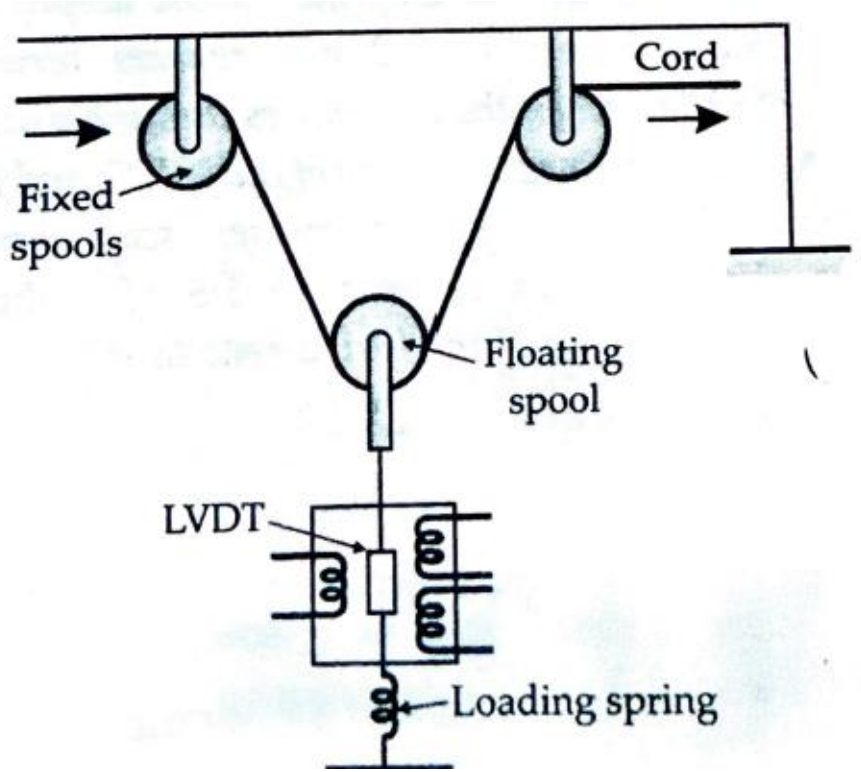

Capacitive transducer

- Working principle
- Governing equation

$$C = \varepsilon A/d$$

$$C = \varepsilon_r \varepsilon_0 A/d$$

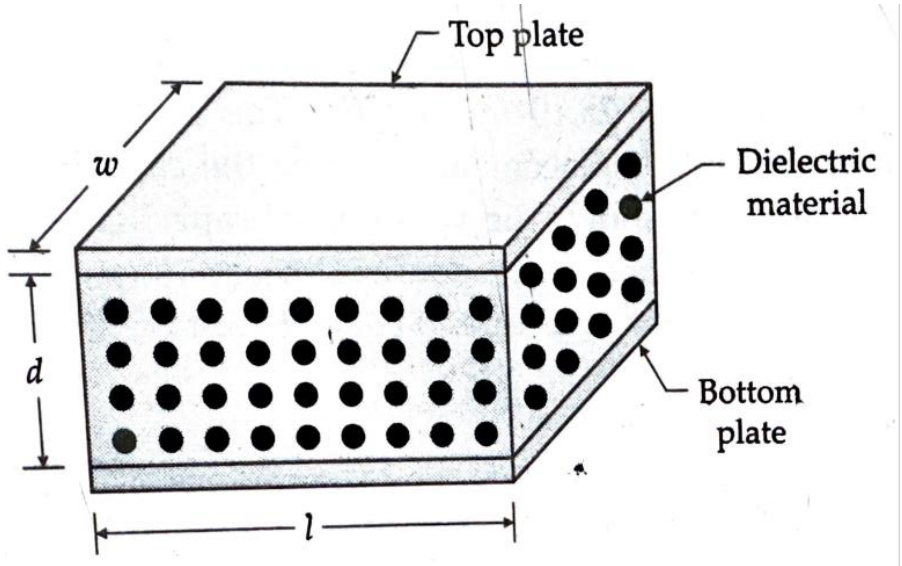

Capacitive transducer

- Working principle:
  - Change in overlapping area
  - Change in distance
  - Change the dielectric constant

- Output impedance

$$X_c = 1/2\pi f C$$

- Maximum power transfer theorem

Capacitive transducer

Impedance matching

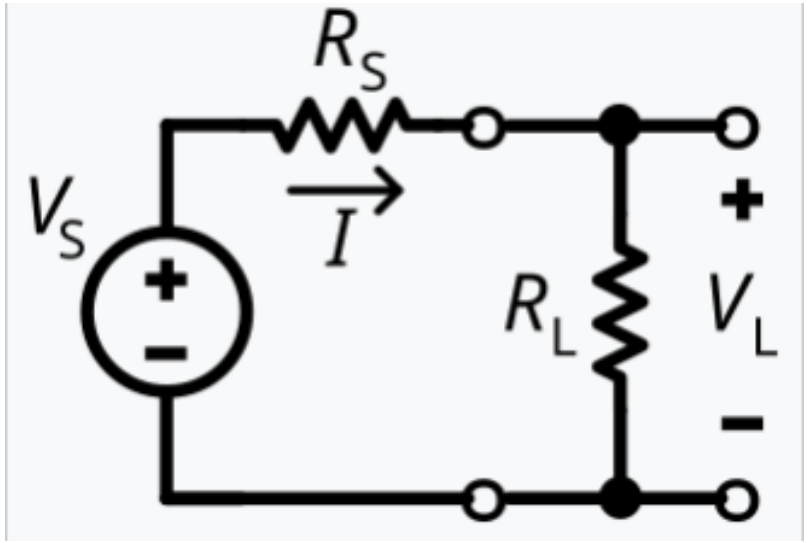

$$\eta = \frac{P_{\mathrm{L}}}{P_{\mathrm{Total}}} = \frac{I^2 \cdot R_{\mathrm{L}}}{I^2 \cdot (R_{\mathrm{L}} + R_{\mathrm{S}})} = \frac{R_{\mathrm{L}}}{R_{\mathrm{L}} + R_{\mathrm{S}}} = \frac{1}{1 + R_{\mathrm{S}}/R_{\mathrm{L}}}.$$

Capacitive transducer

Change in area

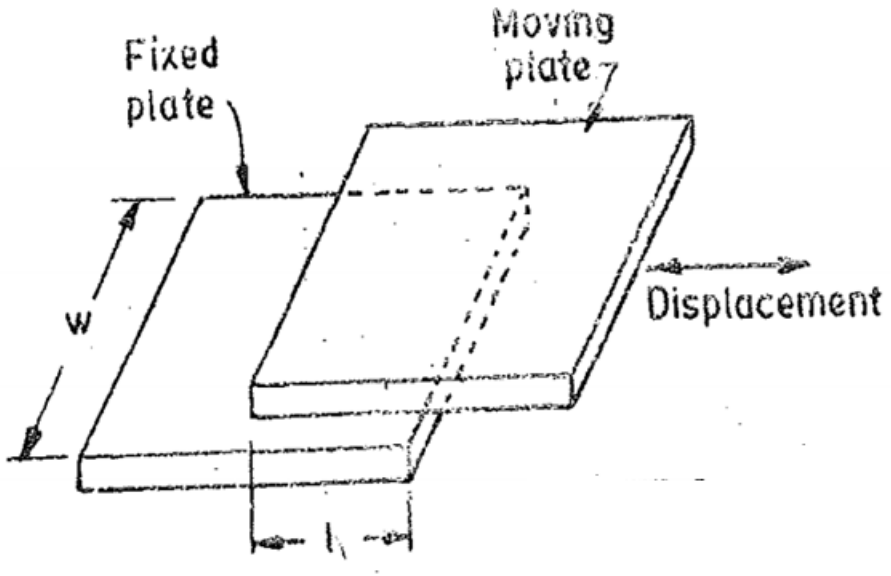

Capacitive transducer

Change in area

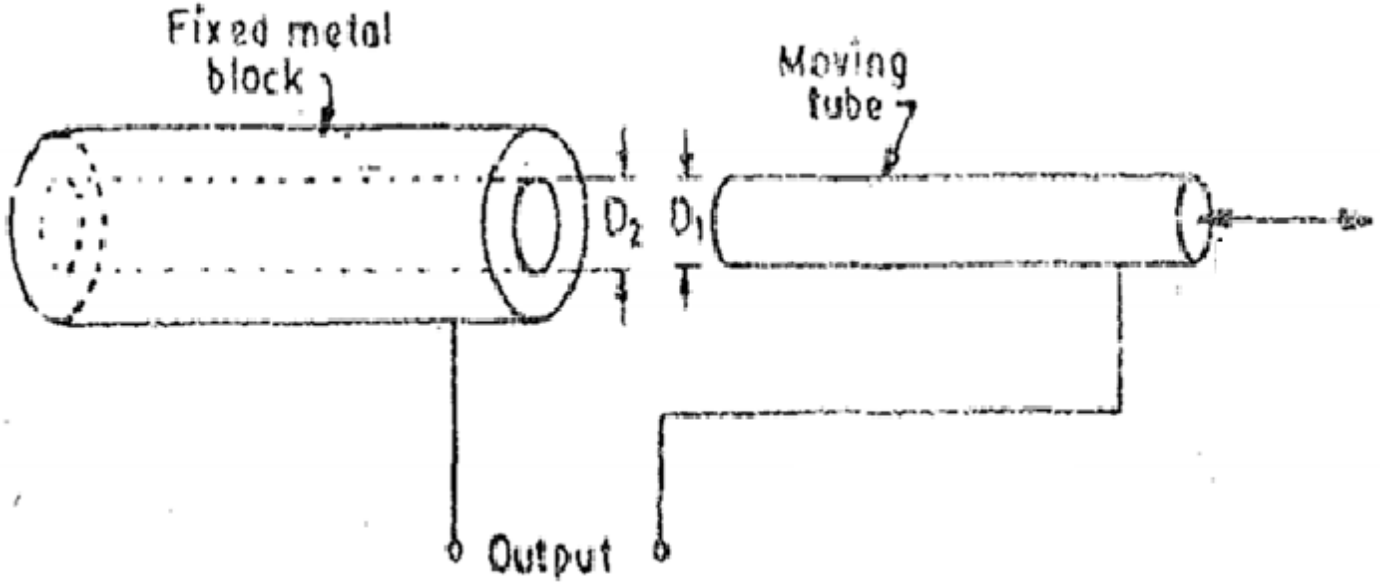

Capacitive transducer

Change in area (angular displacement)

$$C_{\text{multi}} = \frac{\epsilon A}{d} = \frac{\pi \epsilon r^2}{2d}$$

$$C = \frac{\epsilon r^2}{2d} \cdot \theta$$

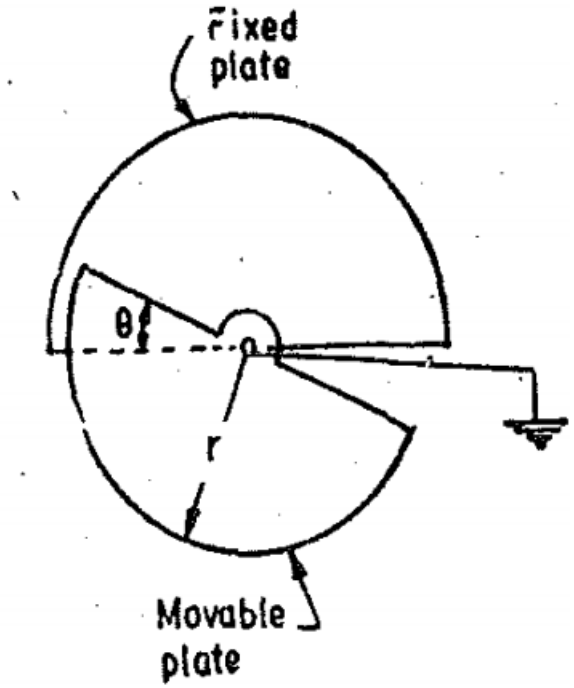

Capacitive transducer

Applications: cantilever spring plate

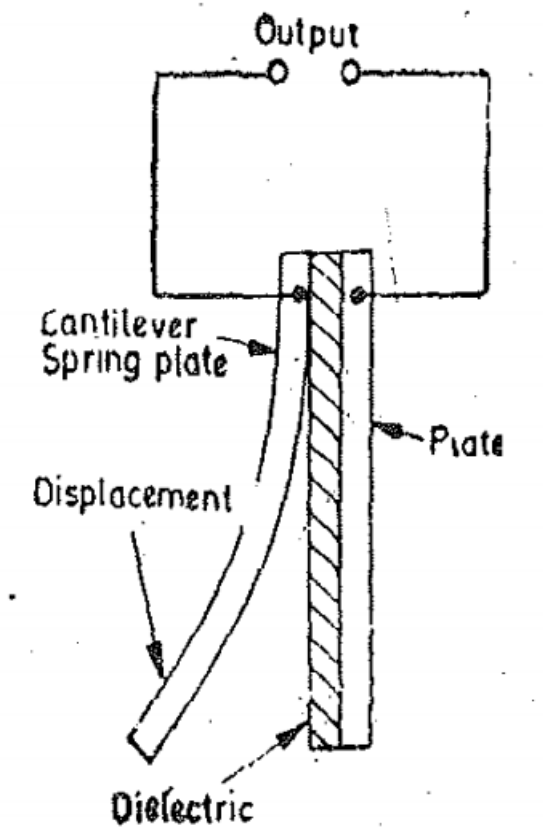

Capacitive transducer

Applications: rotational displacement

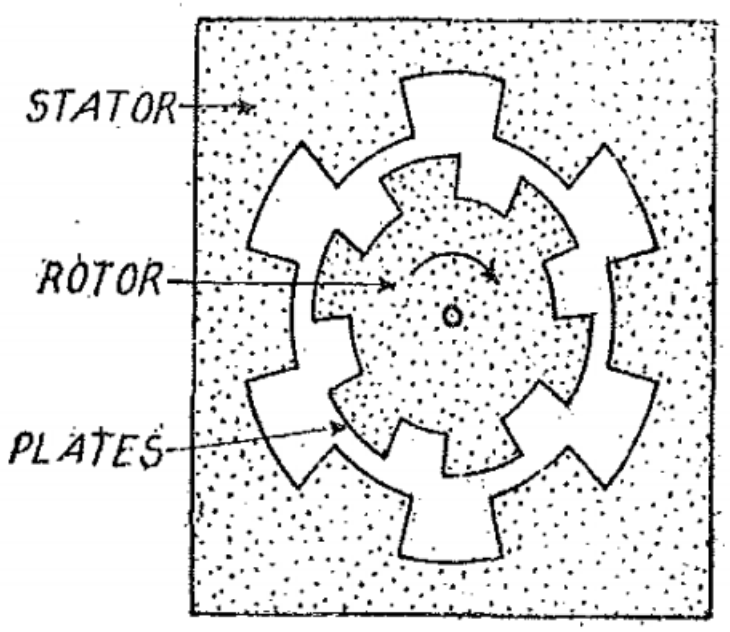

Capacitive transducer

Differential arrangement

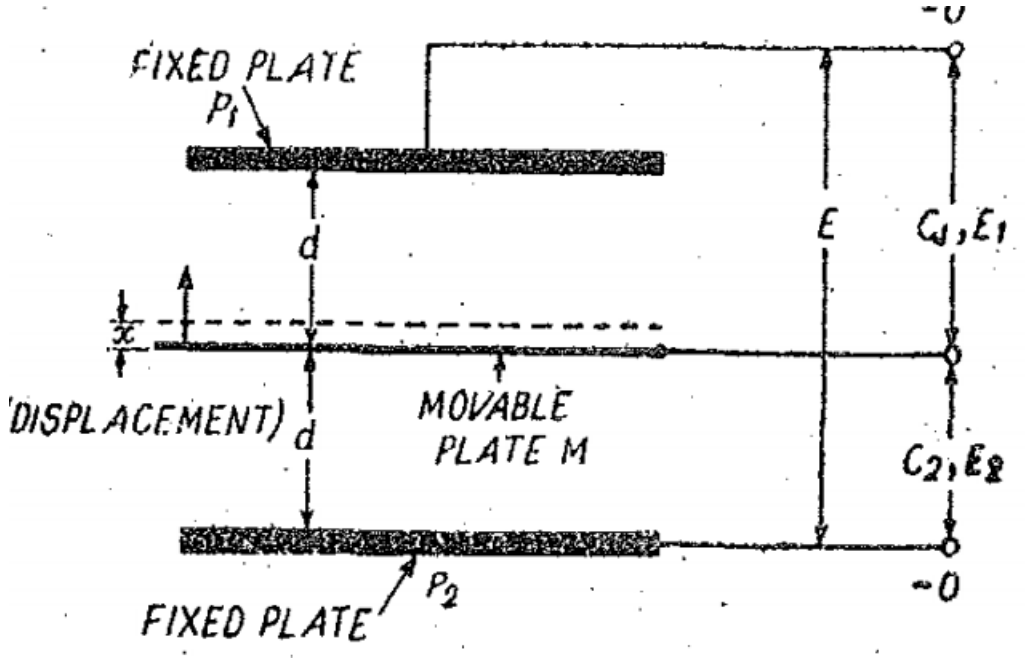

Capacitive transducer

Variation of dielectric constant

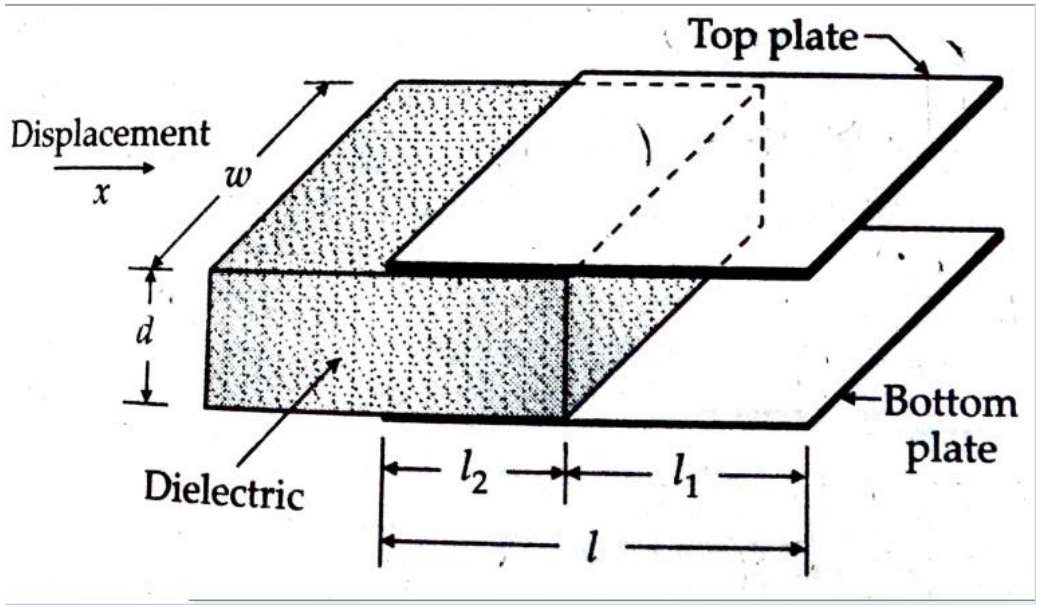

Capacitive transducer

Liquid level measurement

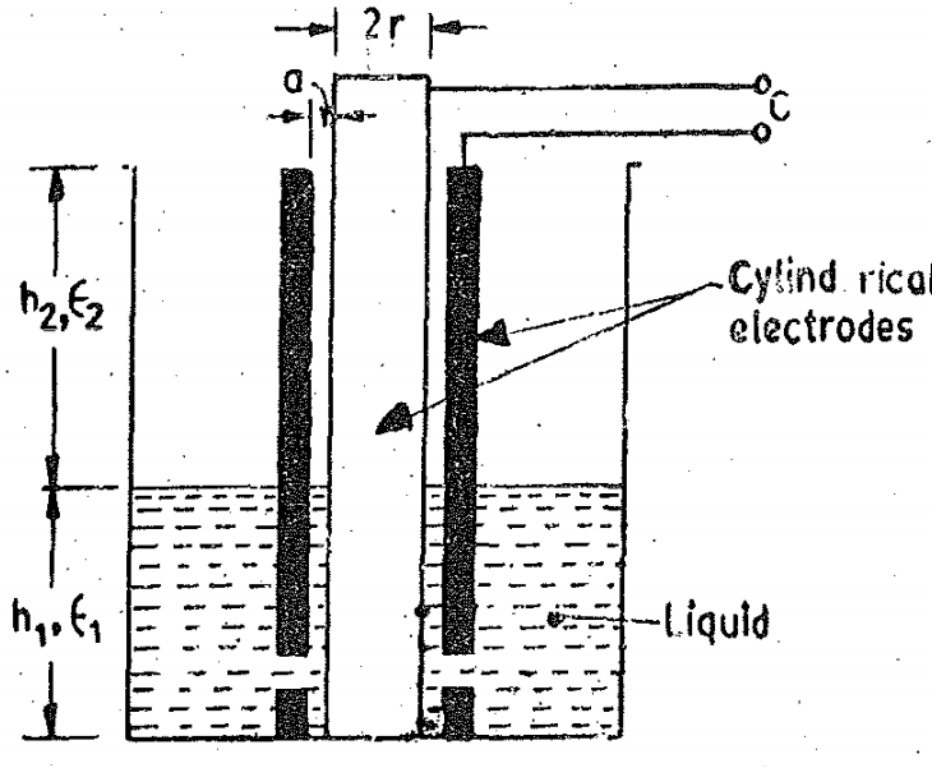

Advantages of capacitive transducers

- Small operating force
- Extremely sensitive
- Good frequency response
- Minimum loading effect
- Small operating voltage is required
- Low resolution can be obtained using these transducers

Disadvantages of capacitive transducers

- Insulation
- Edge effect → Guard ring
- High output impedance
- Connecting cable
- Environmental effect (dust particles and moisture)
- Temperature sensitivity
- Signal conditioning unit

Applications of capacitive transducers

- Measurement of linear and angular displacement
- Measurement of force and pressure
- Pressure sensor → Change in dielectric constant
- Measurement of humidity

Capacitive transducer

Numerical example 1:

The figure shows a capacitive transducer using five plates. The dimensions of each plate are 25 × 25 mm and the distance between plates is 0.25 mm. This arrangement is to be used to measure displacement by observing the change in capacitance with the distance x. Calculate the sensitivity of the device. Assume that the plates are separated by air. The permittivity of air is 8.85×10^{-12} F/m.

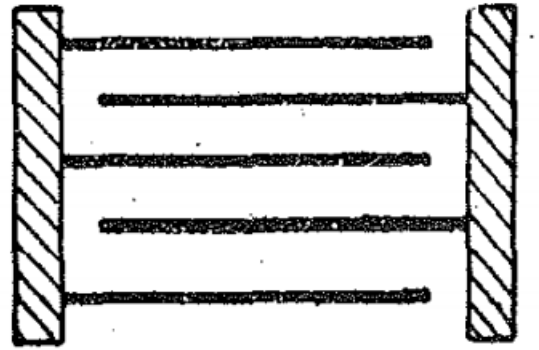

Ans: 3.54 pF/mm

References

- Measurement Systems: Application and Design, Ernest O. Doebelin, Paperback
- Sensor & transducers, D. Patranabis, 2nd edition, PHI
- Instrument transducers, H.K.P. Neubert, Oxford University press
- Measurement systems: application & design, E.A.Doebelin, Mc Graw Hill.
- Electrical and Electronics Measurement, A. K. Sawhney, *Dhanpat Rai & Co* (2005)

Thank you for your attention!