


Low Voltage AC Magnetic Switch

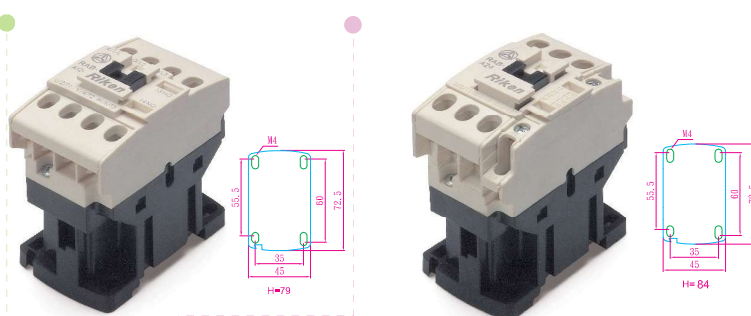

Contactor Models (TYPE)			RAB-A12		RAB-A15		RAB-A18		RAB-A24	
Rated Insulation Voltage (Ui) IEC / CNS V			690/600		690/600		690/600		690/600	
Reted Operational Voltage (Ue) IEC/CNS V			660/600		660/600		660/600		660/600	
Continuous Operational Current (Ith) IEC/CNS A			25		25		32		35	
Continuous Operational Current (Ith) UL A			24		25		32		35	
Ie Max AC3 under 460V Current (A)			12		16		18		24	
AC4 Current (A)			2.7		5		7		10	
			KW	HP	KW	HP	KW	HP	KW	HP
AC3 Rated Capacity IEC 60947-4-1 CNS 2930 JEM 1038 JIS C8325 GB 14048.4 - 2003	Single phase	110V	0.55	0.75	0.55	0.75	0.75	1	1.1	1.5
		220V	1.1	1.5	1.1	1.5	1.5	2	2.2	3
	Three phase	220V	3	4	3	4	4	5.5	5.5	7.5
		380V	5.5	7.5	6.5	8.5	7.5	10	11	15
		440V	5.5	7.5	6.5	8.5	9	12	11	15
		550V	7.5	10	9	12.5	10	13.5	12	16
UL Specification										
Rated Continuous Current AC1(A)			24		24		32		32	
Rated Capacity UL 508 CSA C22.2	Single phase	120V	0.37	1/2	0.37	1/2	0.75	1	0.75	1
		240V	1.5	2	1.5	2	2.2	3	2.2	3
	Three phase	240V	2.2	3	2.2	3	3.7	5	3.7	5
		380V	3.7	5	3.7	5	5.5	7.5	5.5	7.5
		460V	5.5	7.5	5.5	7.5	7.5	10	7.5	10
575V			7.5	10	7.5	10	9	12	9	12
AC3, 1.0	Numbers of switchings / hour		1200							
	Electrical Operations AC3 (unit:10 ⁴)		100							
	Mechanical Operations (unit:10 ⁴)		1000							
Auxiliary Contacts (A600 Q300)	Contact Structure		3P 1a or 1b		3P 1a 1b		3P 1a 1b		3P 1a 1b	
	Rated Voltage(V)		600		600		600		600	
	Continuous Current(A)		10		10		10		10	
A Type Magnetic Starter RAB-	Open type		A12 S1/E1		A15 S1/E1		A18 S1/E1		A24 S1/E1	
	Enclosed type	IP42	A12 S24/E24		A15 S24/E24		A18 S24/E24		A24 S24/E24	
		IP65	A12 S26/E26		A15 S26/E26		A18 S26/E26		A24 S26/E26	
	Enclosed type (with buttons)	IP42	A12 S34/E34		A15 S34/E34		A18 S34/E34		A24 S34/E34	
IP65		A12 S36/E36		A15 S36/E36		A18 S36/E36		A24 S36/E36		
A Type Reversing Magnetic Starter RRAB-	Open type		A12 S1/E1		A15 S1/E1		A18 S1/E1		A24 S1/E1	
	Enclosed type		A12 S2/E2		A15 S2/E2		A18 S2/E2		A24 S2/E2	
Selection Of Thermal Overload Relay (Standard)	BTH-A25	2H Overload protection	0.45 0.96 2.6 4.2 8 11 18 0.72 1.45 3.4 6 9 13 25							
		2E Overload and phase failure protection								
Selection Of Thermal Overload Relay (Standard)	BTH-A36	2H Overload protection								
		2E Overload and phase failure protection								
Selection Of Thermal Overload Relay (Optional)	BTH-18T	2H Overload protection	○		○		○		○	
		2E Overload and phase failure protection	○		○		○		○	
Selection Of Thermal Overload Relay (Optional)	BTH-35T	2H Overload protection	—		—		—		—	
		2E Overload and phase failure protection	—		—		—		—	